


Product Data Sheet

M Series Threaded Rod



Part No.	Part No.	Part No.	Part No.	Part No.	Finish	
M6	M8	M10	M12	M16	ZP	SS HG
M6x1M	M8x1M	M10x1M	M12x1M	M16x1M	•	• •
M6x2M	M8x2M	M10x2M	M12x2M	M16x2M	•	• •
M6x3M	M8x3M	M10x3M	M12x3M	M16x3M	•	• •

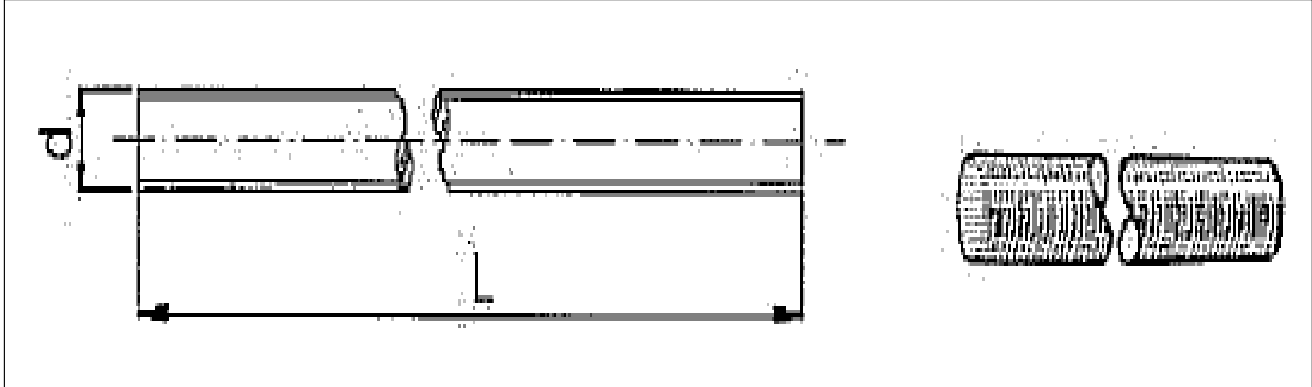

L=1, 2 & 3 M [ZP,SS]
L=1 M [HG]

ZP **SS** **HG**

Size	Safe Working Load (kgs.)
M6	245
M8	448
M10	709
M12	1030

These loads are for the Rod only and the fixing method should be taken into consideration. i.e. The pull out load with an M12 Channel Nut in P1000 Channel is 900 kgs. Which is less than the Safe Working Load of the Rod.

Materials

Steel to suit requirements of DIN 976-1 property class 4.8
Stainless Steel to suit requirements of DIN 976-1 property class A4-70

Finishes

ZP= Bright Zinc Plate to DIN EN ISO 4042
HG= Hot Dip Galvanized to Din 267 -10
SS= Self Colour