

96631745 KAT RD 2000-840 MWS

LED 16W KATO_HO_84	IP65		IK10		850°C	T _a -15 +35
--------------------	------	---	------	---	-------	---------------------------


Katona

A very slim, round functional LED luminaire. LED driver. Body: white polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. With integral motion sensor for on/off control. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.


Dimensions: Ø307 x 58 mm
Total power: 16.3 W
Luminaire luminous flux: 1950 lm
Luminaire efficacy: 120 lm/W
Weight: 1.1 kg



TLG_KATO_F_RD_PDB.jpg

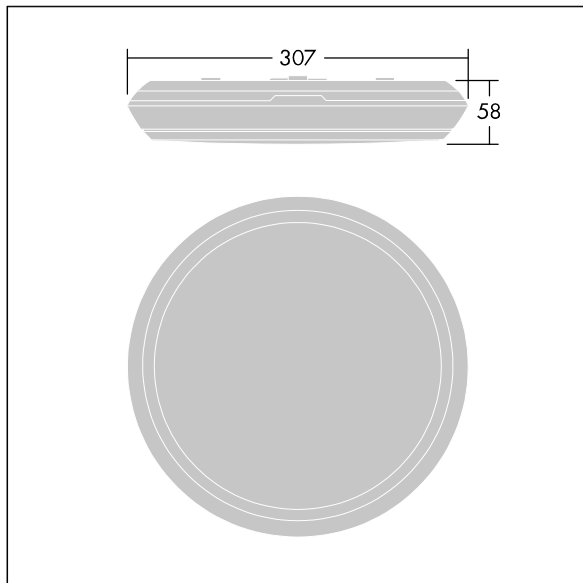

TLG_KATO_M_RD_LDS.wmf

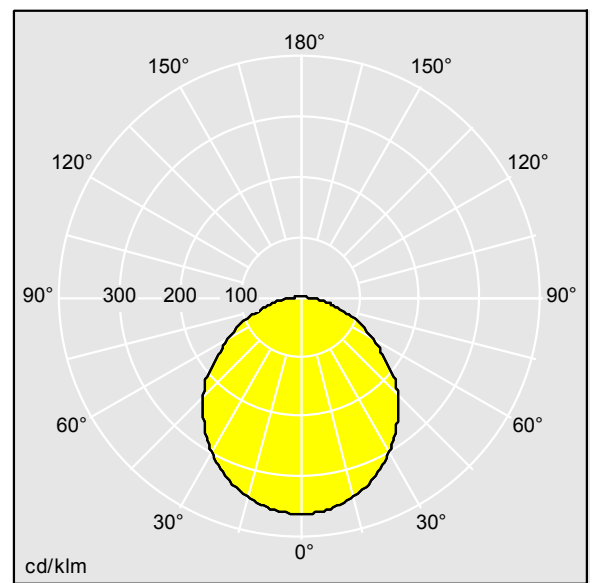

TLG_SP_0043600.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1950 lm
Luminaire efficacy*: 120 lm/W
Lamp efficacy: 119 lm/W
Colour Rendering Index min.: 80


Correlated colour temperature*: 4000 Kelvin
Chromaticity tolerance (initial MacAdam)*: 3
Rated median useful life*:
50000h L80 at 35°C
Ballast: 1x LED_DRV Tridonic LC
Luminaire input power*: 16.3 W Power factor = 0.91
LOR: 1,00 ULOR: 0,03 DLOR: 0,97

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96631745 KAT RD 2000-840 MWS

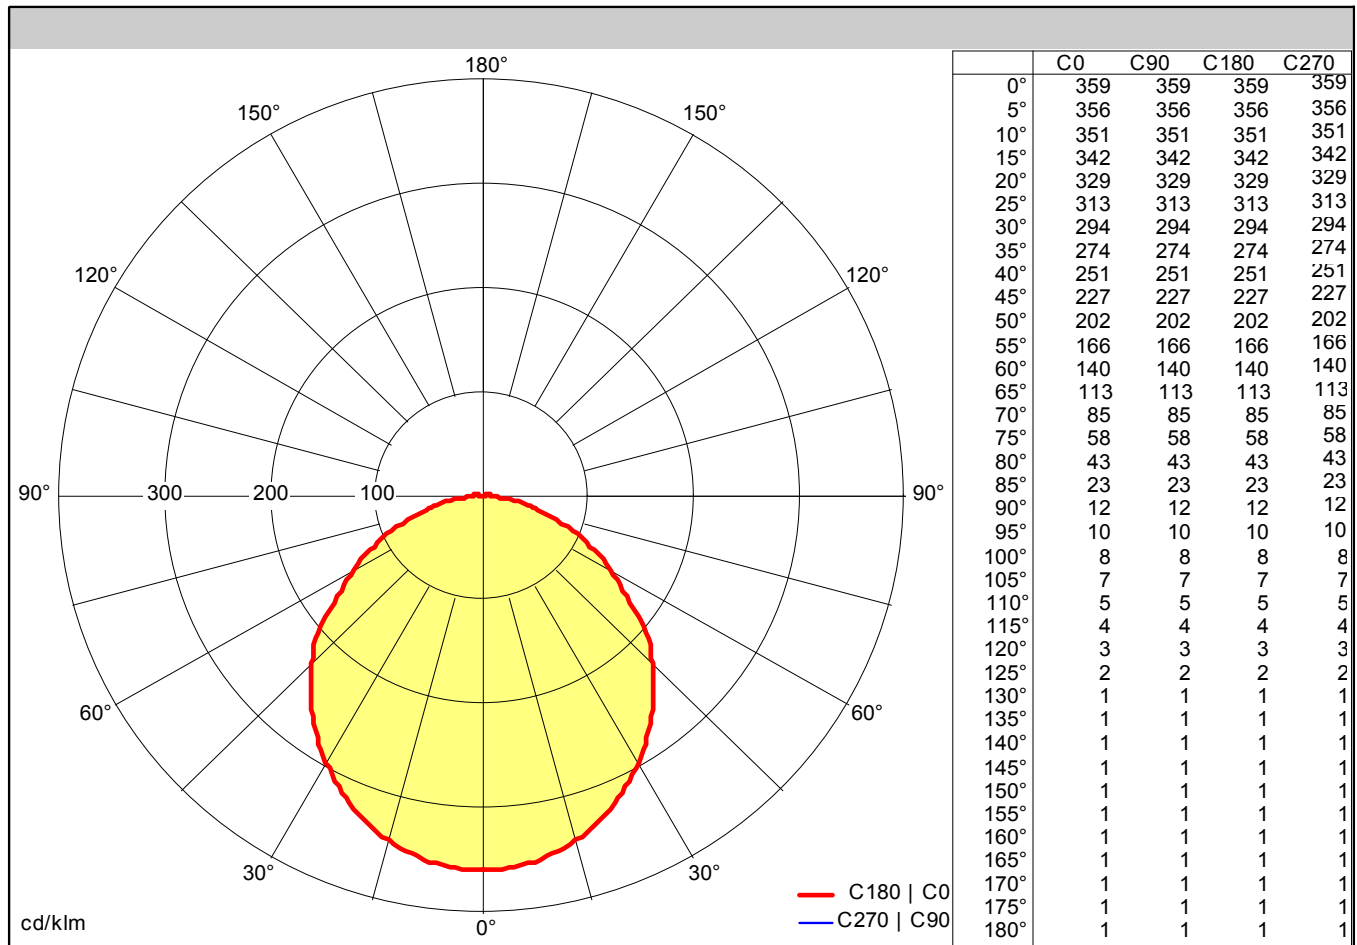

Light output ratio		Glare Evaluation		Classification	
LOR	100 %	X = 4 H, Y = 8 H	S = 1.00 H	LiTG	A41
ULOR	3 %	Reflection factors	70/50/20	EN	
DLOR	97 %	UGR transversal	<25	BZ	BZ4
FFR	0.03 (3:97)	UGR axial	<25	UTE	0.97 D + 0.03 T
BLF	1.00			CIE Flux Codes	48 79 95 97 100

Utilization Factors									
Room Reflectance Ceiling/Walls/Floor	Room Index								
	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70 / 50 / 20	57	67	74	79	86	91	95	99	102
70 / 30 / 20	49	59	67	72	80	86	90	95	99
70 / 10 / 20	43	54	61	67	75	81	85	91	95
50 / 50 / 20	55	65	71	76	83	87	91	95	97
50 / 30 / 20	48	58	65	70	78	83	86	91	95
50 / 10 / 20	43	53	60	66	73	79	83	88	92
30 / 50 / 20	53	62	69	73	80	84	87	91	93
30 / 30 / 20	47	57	63	68	75	80	83	88	91
30 / 10 / 20	42	52	59	64	72	77	81	85	89
0 / 0 / 0	40	49	56	61	68	72	76	80	83
According to CIBSE Technical Memorandum No. 5 1980						SHR Nom =	1.25		
						SHR Max =	1.43		
						SHR Max TR =	1.74		

Photometric data file: TLG_SP_0043600.lgt