

Escala Pro LED Dimmable

Track Lighting



Data Sheet

Product Information

The Escala Pro LED Dimmable range of track fittings are ideal for domestic or commercial applications where you want a highly efficient light source.

With the adjustable beam angle feature the fitting lends itself well to applications where flexibility is needed without having to replace the fitting or add an attachment

They come complete with 3 year warranty

Product Features

- 3 year warranty
- Class I
- IP20
- High efficiency
- 3000K or 4000K LED
- CRI: >Ra90
- Adjustable beam
- Instant on
- Suitable for Escala Pro Surface Plate (KSR6511)
- Mains Dimmable Integrated drivers
- Lighting designers can download photometric data from our website

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)		CRI (Ra)	Energy Efficiency Class	Protection Class	Beam Angle
KSR6560	Escala Pro 20W 3000K LED Adjustable Beam Track Fitting	20	3000	FL	960	91	A	I	15-30°
				NFL	1011				
				SP	746				
KSR6561	Escala Pro 20W 4000K LED Adjustable Beam Track Fitting	20	4000	FL	TBC	91	A	I	15-30°
				NFL	TBC				
				SP	TBC				
KSR6562	Escala Pro 30W 3000K LED Adjustable Beam Track Fitting	30	3000	FL	2109	92	A	I	15-36°
				NFL	1998				
				SP	1486				
KSR6563	Escala Pro 30W 4000K LED Adjustable Beam Track Fitting	30	4000	FL	TBC	92	A	I	15-36°
				NFL	TBC				
				SP	TBC				
Optional Accessory									
KSR6414	Escala 3 Circuit track adapter for Escala Pro Single Circuit fittings								

Nominal voltage	220~240V
Operating frequency	50-60Hz
Ambient temperature range	-20°C~+40°C
Start time	< 0.5 sec
IP rating	20

Construction

Body: Steel
Rim: Aluminium


Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests


In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2009/125/EC
RoHS Restriction of hazardous substances 2011/65/EU

Product Dimensions

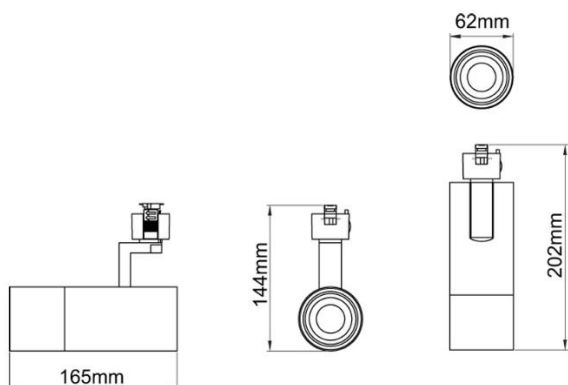

KSR6560-61

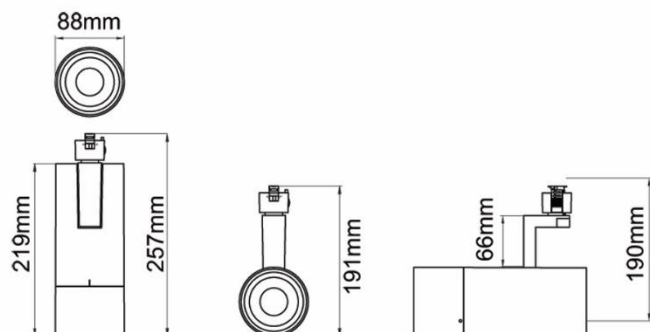

KSR6562-63

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.