


# Product datasheet

Specifications

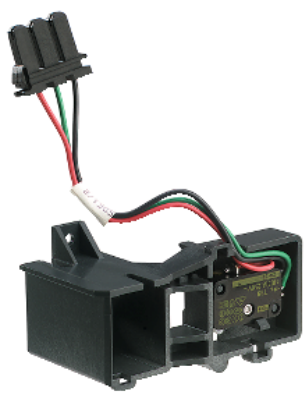

## auxiliary contact SDE - 6 A - 1 NO/NC - for Masterpact NT

47078

### Main

Device short name	SDE
Product or component type	Auxiliary contact
Device application	Connection
Range compatibility	MasterPact NT circuit breaker
Signal contacts composition	1 NO/NC

### Complementary

Auxiliary contacts type	Standard
[Ith] conventional free air thermal current	6 A
[Ie] rated operational current	AC-12: 3 A at 690 V AC 50/60 Hz DC-12: 3 A at 24/48 V DC AC-12: 5 A at 240/380 V AC 50/60 Hz AC-12: 5 A at 480 V AC 50/60 Hz DC-12: 0.15 A at 250 V DC DC-12: 0.3 A at 125 V DC
Minimum load	100 mA at 24 V
Accessory / separate part category	Spare parts for Masterpact NT

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	24 g
Package 1 Height	3 cm
Package 1 width	5 cm
Package 1 Length	21 cm
Unit Type of Package 2	S03
Number of Units in Package 2	100
Package 2 Weight	2.587 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------