### Installation Sheet

### KSRDL101

# Twist & Lock((i)

## **Recessed Downlight**

KSRDL101

Available finishes:- White, Chrome & Satin Chrome

Read these instructions before commencing installation & retain them for future reference.

These Fittings are Class II: Double insulated, No Earth required.

### **Important Information**

It is recommended that luminaires are installed by a qualified electrician. The installation of this product must comply with the current edition of the IEE wiring regulations BS7671.

These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

### **Important User Advice**

Always switch off mains supply before servicing, fitting or changing lamp. Check the lamp is correct for the application, including its voltage and wattage.

Ensure that the lamp is correctly located in the lampholder. Switch on electricity at mains.


#### **Installation Details**


Cut a 72mm round hole in ceiling and ensure adequate minimum ceiling void without infringing on joists, water pipes or electrical cables.

Connect this product to a mains 240V 50Hz supply.

Fit this product as per the illustration shown in (Fig 1). Do not fit onto new plaster or damp areas.

This appliance will be considered Class II, the cabling from connector to lampholder has two thickness of insulation.

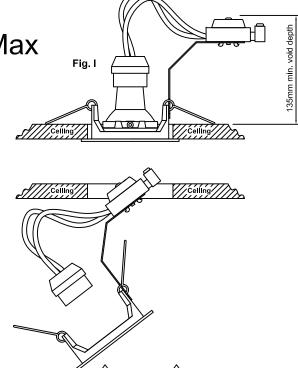




\*Ensure there is adequate free air ventilation around fitting. The nearest illuminated surface must

the nearest illuminated surface must be at least 0.5m distance from the front of the fitting.





Tel: 023 92 674343

E-mail: info@ksr-lighting.co.uk