

# Anna Vario

Recessed LED Panel

New



Low glare and calm, Anna Vario is the universal talent for desk space environments

- Gentle, soft and glare free lighting (UGR <19)
- Three colour temperatures in one product - simply select 3000 K (warm white), 3500K or 4000K (neutral white) to suit the application use
- Even surface and IP44 (from below) for hassle-free cleaning
- Easy, quick and tool-free installation thanks to an integrated connector with a 4-pole push-terminal (for up to 2.5 mm<sup>2</sup> wires) enabling loop-in loop-out wiring
- The fully detachable connector allows for first fix wiring and high voltage circuit testing whilst the luminaire is detached from the connector
- Suitable to use with the Just Emergency PLUG&PLAY E3 KIT for 3 hours emergency operation (separately available)



CCT switch  
(3000 K, 3500 K  
and 4000 K)



596 × 596 mm:  
3750 lm or  
3000 lm



596 × 596 mm  
1196 × 296 mm

1196 × 296 mm:  
4000 lm



UGR <19:  
gentle, soft  
and glare-  
free lighting  
for office  
applications



IP44  
(from below):  
Splash resistant  
for hassle-free  
cleaning



50 000 h life-  
time before  
luminous flux  
is reduced to  
80% of the  
initial value

Ideal for ...




Offices and  
meeting rooms




Schools and  
universities




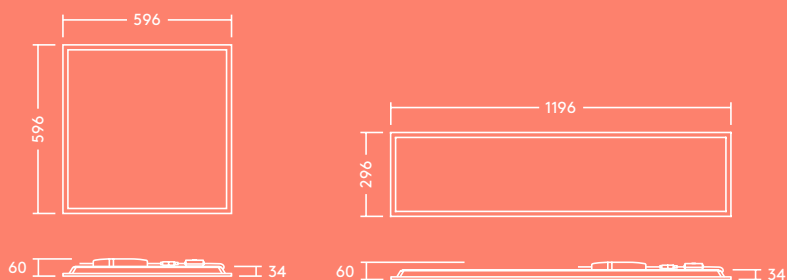

## Lighting distribution



**Anna Vario 3750 lm**  
 cd/klm ULOR: 0 %  
 DLOR: 100 %  
 LOR: 100 %

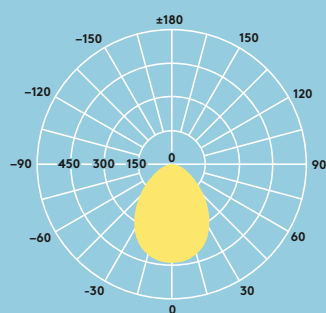

## Light source information

- 596 × 596 (3750 lm):
  - 3000K: 3500 lm / 34W
  - 3500K: 3800 lm / 33W
  - 4000K: 3750 lm / 34W
  - 50000 hours rated life (@L80, T<sub>a</sub> 25°C)
  - CRI 80
  - MacAdam (initial): 4 step
  - UGR < 19
- 596 × 596 (3000 lm):
  - 3000K: 2800 lm / 29W
  - 3500K: 3000 lm / 29W
  - 4000K: 3000 lm / 29W
- 1196 × 296:
  - 3000K: 3800 lm / 34W
  - 3500K: 4000 lm / 33W
  - 4000K: 4000 lm / 34W

## Installation/Mounting

- Lay-in installation in T-bar ceiling grids
- Suitable for suspension, surface and recessed installation (accessories available separately)
- mineral wool insulation can be placed directly over the top of the fitting

## Material/Finish

Frame: Aluminum, white (RAL 9003)  
 Diffuser: TpB rated, PET, opal  
 Light guide plate: PS  
 Backplate: Steel sheet

## Ordering guide

Description	Wt (kg)	Cat. No.
ANNA VARIO Q596 3000 830/35/40	2.08	AN3000ZVK
ANNA VARIO Q596 3750 830/35/40	2.08	AN3750ZVK
ANNA VARIO 1200 × 300 4000 830/35/40	1.88	AN4000ZVK
<b>DALI</b>		
ANNA VARIO Q596 3750 830/35/40 HFIX	2.60	AN3750XVK
ANNA VARIO 1200 × 300 4000 830/35/40 HFIX	1.95	AN4000XVK
<b>Accessories</b>		
ANNA VARIO Q596 Recessed Mount Box		ANVARECBOX
ANNA VARIO Q596 Slim Surface Mount Box		ANVASURBOX
ANNA VAR 1200 × 300 Slim Surface Mount Box		ANVA12X3SURBOX
Just E3 PLUG&PLAY Kit SelfTest LiFePo4		ECO3TLIFEKIT
Just Emergency PLUG&PLAY E3 Kit*		ECO3KIT
Just Emergency PLUG&PLAY SelfTest E3 Kit*		ECO3TKIT

830 – 3000K / 835 – 3500K / 840 – 4000K  
 Default setting: 4000K  
 \* While stocks lasts

## Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- ENEC certified driver
- Ambient operating temperature: -20 to +40 °C

