

DESCRIPTION:

Beta Flexi-Duct is a flexible cable routing system designed for use in control panels, distribution boards, or in difficult to reach areas. Cables can be routed in or out over the whole length, and it is mounted either with screws, using the DIN standard base punching, or with the self-adhesive strip on the back. For longer runs, two or more lengths can be joined by snapping the ends together. Its possible to install the flexi-duct at 90° angles for increased flexibility.

APPLICATION:

Designed for use in control panels, distribution boards, or in difficult to reach areas.


SPECIFICATION:

MATERIAL: Halogen-free polypropylene

SERVICE TEMPERATURE RATING: -40°C - +70°C



FLAMMABILITY: Flame resistant: UL94 V-2 Rated material

COLOUR: Grey RAL 7035

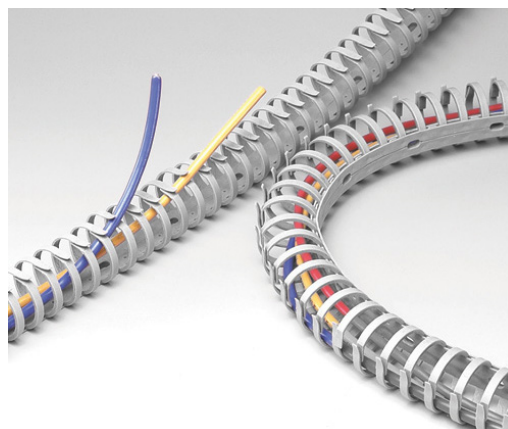

PART NUMBERS:

PART NUMBER	COLOUR	WxH (mm)	PACK QTY. (m)
BETA FLEXI-DUCT - ROUND			
GMF-20T	Grey	20	2 x 0.5
GMF-30T	Grey	30	2 x 0.5
GMF-40T	Grey	40	1 x 0.5

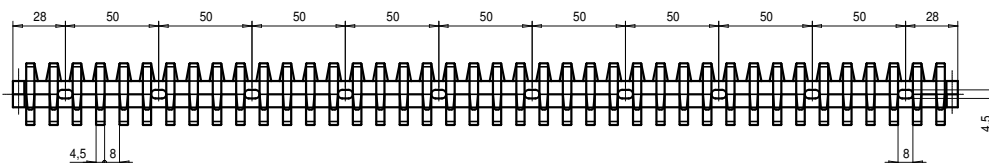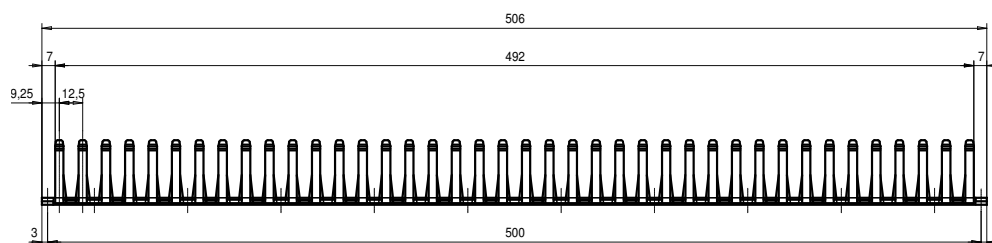

CABLECRAFT
creative wiring solutions



**INVESTORS
IN PEOPLE**



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297