

DESCRIPTION:

Cablecraft's range contains sizes for cables from 0.5mm² - 6mm² and stud sizes from 2.2mm to 8.4mm. They maintain strength during the crimping cycle, and are electro tin plated for maximum corrosion resistance and conductivity.

SPECIFICATION:

MATERIAL:

Oxygen-Free, High Conductivity Copper Sheet with High Ductility Silver Alloy Brazing.

MAX. ELEC. RATING:

0.5-1.5 - 19 AMP


1.5-2.5 - 27 AMP

4-6 - 48 AMP

600 volts - Max Temp: 75°C

APPROVALS:

UL Approved E211389.

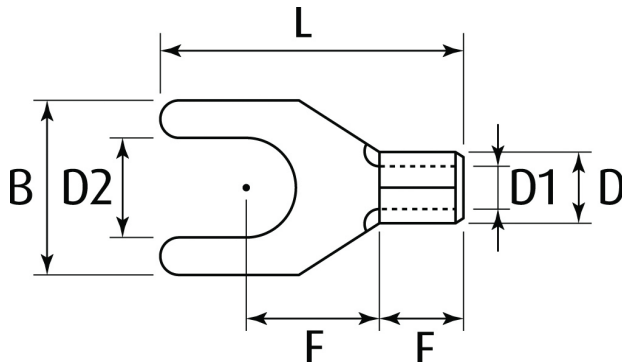

PART NUMBERS:

WIRE Ø mm ²	PART NO.	STUD SIZE D2 (mm)	DIMENSIONS (mm)						PACK QTY
			B	L	F	E	D	D1	
0.5 - 1.5	CF1-3N	3.2	5.0	16.0	6.3	5.0	3.4	1.7	100
	CF1-3	3.2	5.8	16.0	6.3	5.0	3.4	1.7	100
	CF1-3.5	3.7	5.8	16.0	6.3	5.0	3.4	1.7	100
	CF1-4	4.3	6.4	15.6	6.3	5.0	3.4	1.7	100
	CF1-5	5.3	8.0	16.0	7.0	5.0	3.4	1.7	100
1.5 - 2.5	CF2-3N	3.2	5.0	16.0	6.3	5.0	4.1	2.3	100
	CF2-3	3.2	5.8	16.0	6.3	5.0	4.1	2.3	100
	CF2-3.5	3.7	6.4	16.0	6.3	5.0	4.1	2.3	100
	CF2-4	4.3	6.4	16.0	6.3	5.0	4.1	2.3	100
	CF2-5	5.3	8.5	17.0	7.3	5.0	4.1	2.3	100
4 - 6	CF3-3.5	3.7	7.2	18.7	7.5	6.0	5.6	3.4	50
	CF3-4	4.3	8.5	18.7	7.5	6.0	5.6	3.4	50
	CF3-5	5.3	9.5	18.7	7.5	6.0	5.6	3.4	50
	CF3-6	6.5	12.0	24.7	12.0	6.0	5.6	3.4	50



CABLECRAFT
creative wiring solutions



INVESTORS
IN PEOPLE



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • Fax: 01582 606063 • Email: sales@cablecraft.co.uk • Web: www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297