




**Pre-insulated PVC butt connectors.**

**Key features.**

- Made from oxygen-free high conductivity copper
- Electro-tin plated for excellent conductivity and resistance to corrosion

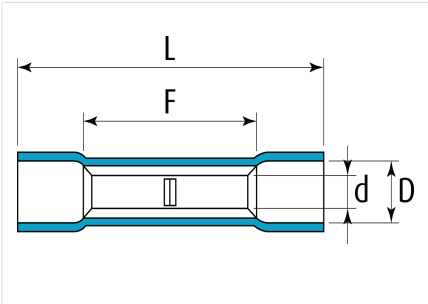

**Specification.**

Material:  
Electro-tin plated copper

Insulation:  
Polyvinyl chloride (PVC)

Max. electrical rating:  
■ Red - 19 AMP  
■ Blue - 27 AMP  
■ Yellow - 48 AMP  
600 Volts - max.  
Max temperature 75° C

Insulation:  
UL Approved E211389, RoHS compliant

| Wire Ø mm²     | Part no. | L    | F    | d   | D   | Pack quantity |
|----------------|----------|------|------|-----|-----|---------------|
| 0.5 - 1.5 Red  | CIBC1    | 26.0 | 15.0 | 1.7 | 4.1 | 100           |
| 1.5 - 2.5 Blue | CIBC2    | 26.0 | 15.0 | 2.3 | 4.5 | 50            |
| 4 - 6 Yellow   | CIBC3    | 26.0 | 15.0 | 3.4 | 6.5 | 50            |

