




Pre-insulated PVC fork terminals.

Key features.

- Made from oxygen-free high conductivity copper
- Electro-tin plated for excellent conductivity and resistance to corrosion

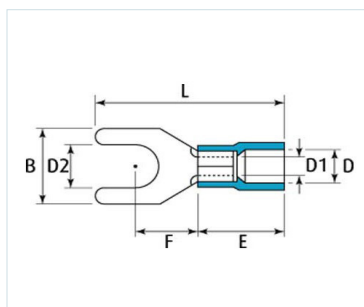

Specification.

Material:
Electro-tin plated copper

Insulation:
Polyvinyl chloride (PVC)

Max. electrical rating:
■ Red - 19 AMP
■ Blue - 27 AMP
■ Yellow - 48 AMP
 600 Volts - max.
 Max temperature 75°C

Approvals:
UL Approved E211389, RoHS compliant

Flammability:
UL94 V-0

Wire Ø mm²	Part no.	Stud size D2 mm	Dimensions (mm)						Pack quantity
			B	L	F	E	D	D1	
0.5 - 1.5 Red	CIF1-3	3.2	5.8	21.0	6.3	10.0	4.1	1.7	100
	CIF1-3.5	3.7	5.8	21.0	6.3	10.0	4.1	1.7	100
	CIF1-4	4.3	6.4	20.6	6.3	10.0	4.1	1.7	100
	CIF1-5	5.3	8.0	21.0	7.0	10.0	4.1	1.7	100
	CIF1-6	6.5	9.5	21.0	7.0	10.0	4.1	1.7	100
1.5 - 2.5 Blue	CIF2-3	3.2	5.8	21.0	6.3	10.0	4.5	2.3	100
	CIF2-3.5	3.7	5.8	21.0	6.3	10.0	4.5	2.3	100
	CIF2-4	4.3	6.4	21.0	6.3	10.0	4.5	2.3	100
	CIF2-5	5.3	8.5	22.0	7.3	10.0	4.5	2.3	100
	CIF2-6	6.5	9.5	22.0	7.3	10.0	4.5	2.3	100
	CIF2-8	8.4	12.0	27.2	11.0	10.0	4.5	2.3	100
4-6 Yellow	CIF3-3.5	3.7	7.2	25.2	7.5	12.5	6.5	3.4	50
	CIF3-4	4.3	8.5	25.2	7.5	12.5	6.5	3.4	50
	CIF3-5	5.3	9.5	25.2	7.5	12.5	6.5	3.4	50
	CIF3-6	6.5	9.5	25.2	7.5	12.5	6.5	3.4	50
	CIF3-8	8.4	13.5	30.0	10.5	12.5	6.5	3.4	50

01582 606033 | sales@cablecraft.co.uk | cablecraft.co.uk

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton Regis, Bedfordshire, LU5 5DD

Registered in England and Wales at 12 Charterhouse Square, London EC1M 6AX | Company registration number 02478297

