




Fully insulated PVC push-on female terminals.

Key features.

- Suitable for wires from 0.25mm² to 6.0mm²
- Made from copper-alloy, electro tinned, with a copper reinforcement sleeve
- High mechanical and dielectric resistant insulation, with heat resistant up to +75° C

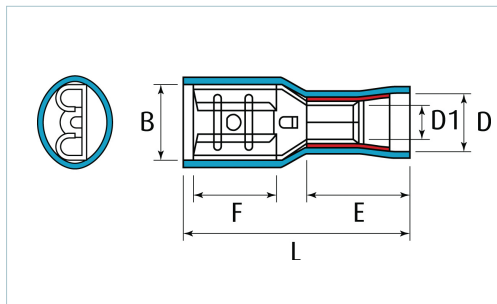

Specification.

Material:
Brass tin-plated

Insulation:
Polyvinyl chloride (PVC)

Max. electrical rating:
■ Red - 10 AMP
■ Blue - 15 AMP
■ Yellow - 24 AMP
 300 Volts - max.
 Max temperature 75° C

Approvals:
UL Approved E228533, RoHS compliant

Wire Ø mm ²	Part no.	For tab		Dimensions (mm)						Pack quantity
		Width (mm)	Thick (mm)	B	F	L	E	D	D1	
0.5 - 1.5 Red	CIFPO1-2.8F	2.8	0.5	3.2	6.4	19.0	10.0	4.3	1.7	100
	CIFPO1-2.8FX	2.8	0.8	3.2	6.4	19.0	10.0	4.3	1.7	100
	CIFPO1-4.8F	4.8	0.5	5.0	6.5	19.0	10.0	4.3	1.7	100
	CIFPO1-4.8FX	4.8	0.8	5.0	6.5	19.0	10.0	4.3	1.7	100
	CIFPO1-6.3F	6.4	0.8	6.6	7.9	21.0	10.0	4.3	1.7	50
1.5 - 2.5 Blue	CIFPO2-2.8F	2.8	0.5	3.2	6.4	19.0	10.0	5.0	2.3	100
	CIFPO2-2.8FX	2.8	0.8	3.2	6.4	19.0	10.0	5.0	2.3	100
	CIFPO2-4.8F	4.8	0.5	5.0	6.5	19.0	10.0	5.0	2.3	100
	CIFPO2-4.8FX	4.8	0.8	5.0	6.5	19.0	10.0	5.0	2.3	100
	CIFPO2-6.3F	6.4	0.8	6.6	7.9	21.0	10.0	5.0	2.3	50
4 - 6 Yellow	CIFPO3-6.3F	6.4	0.8	6.6	7.9	25.0	13.0	6.5	3.4	50
	CIFPO3-9.5F	9.5	1.2	9.9	12.5	28.5	13.0	6.5	3.4	25