




Pre-insulated PVC pin terminals.

Key features.

- Made from oxygen-free high conductivity copper
- Electro-tin plated for excellent conductivity and resistance to corrosion

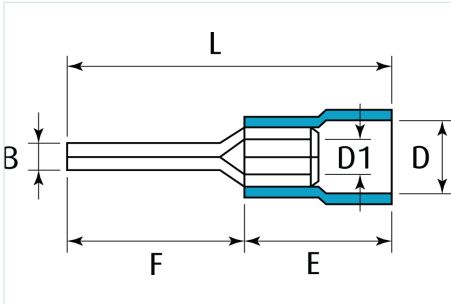

Specification.

Material:
Electro-tin plated copper

Insulation:
Polyvinyl chloride (PVC)

Max. electrical rating:
■ Red - 19 AMP
■ Blue - 27 AMP
■ Yellow - 48 AMP
600 Volts - max.
Max temperature 75° C

Approvals:
UL Approved E211389, RoHS compliant

		Dimensions (mm)						Pack quantity
Wire Ø mm²	Part no.	B	L	F	E	D	D1	
0.5-1.5 Red	CIP1-10	1.9	20.5	10.5	10.0	4.1	1.7	100
	CIP1-12	1.9	22.5	12.5	10.0	4.1	1.7	100
1.5-2.5 Blue	CIP2-10	1.9	20.5	10.5	10.0	4.5	2.3	100
	CIP2-12	1.9	22.5	12.5	10.0	4.5	2.3	100
4-6 Yellow	CIP3-14	2.8	26.5	14.0	12.5	6.5	3.4	50

