


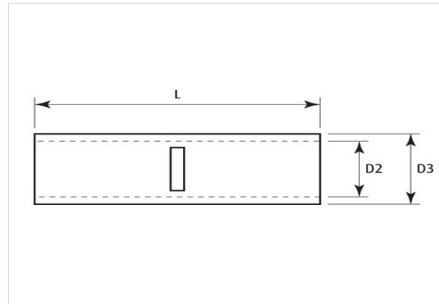

Copper tube splices.

Key features.

- Designed for jointing low voltage conductors from 1.5mm² to 1000mm²
- Internal taper at both ends to ease the insertion of the conductor
- Central stop to ensure correct positioning

Specification.

Material:
Electrolytic copper, electro-tin plated

Approvals:
BS EN 61238-1-2003 and BS 4579

Cable size mm ²	Part no.	Dimensions (mm)			Pack quantity
		L	D2	D3	
1.5	CS1.5	14.0	1.8	3.3	1
2.5	CS2.5	16.0	2.3	4.2	1
4	CS4	19.0	3.0	5.0	1
6	CS6	22.0	4.0	6.0	1
10	CS10	25.0	5.0	7.0	1
16	CS16	30.0	6.0	8.0	1
25	CS25	35.0	7.0	9.0	1
35	CS35	40.0	8.2	10.2	1
50	CS50	44.0	9.5	12.0	1
70	CS70	44.0	11.2	14.2	1
95	CS95	46.0	13.4	16.4	1
120	CS120	50.0	15.0	19.0	1
150	CS150	54.0	17.0	21.0	1
185	CS185	56.0	18.5	22.5	1
240	CS240	58.0	21.0	25.0	1
300	CS300	60.0	23.0	28.0	1
400	CS400	63.0	27.0	32.0	1
500	CS500	135.0	30.0	38.1	1
630	CS630	135.0	33.8	44.0	1
800	CS800	135.0	38.0	49.0	1
1000	CS1000	135.0	42.5	53.0	1