


SELF ADHESIVE

Targhe adesive rivettabili con fori Ø 4 mm

Size mm	white	yellow	grey	red	black	N°holes	Plates per sheet	Quantity	SW Code
15x52	88940				88140	2	14	350	831
20x40	88920	88420	88720GY 88720-HF			2	10	250	864
25x50	88906	88406				2	8	200	860
25x75	88907	88407		88207		2	4	100	809
25x80	88942				88142	2	4	100	832
25x100	88914	88414				2	4	100	206
30x115	88967	88467				2	3	75	780
35x50	88941				88141	2	6	150	833
35x85	88944					2	3	75	823
35x100	88909	88409				2	3	75	818
35x100	88910	88410				4	3	75	818
42x78	88922	88422				2	2	50	819
50x100	88911	88411	88711-HF			4	2	50	811
75x120	88915	88415			88115	4	1	25	816
105x110	88912	88412	88712GY 88712-HF			4	1	25	859

grey

metallic grey

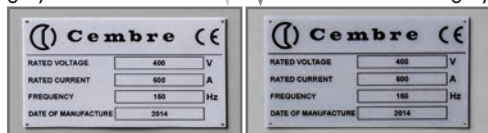

MG-VRT-AH

MG-VRT-AH rigid PVC self adhesive panel plates are used to create name plates, rating plates, data plates using company logos, technical data, serial numbers, EC certification, etc.

CPT (page 119) transparent Polycarbonate covers can be used for increased durability.

Consult us for availability of other colours.

Note: UV resistance may vary between colours.

Material: Rigid PVC,
self extinguishing according to class VO: UL 94

Operating temperature range

-30°C to +60°C
-22°F to +140°F

Application temperature
+10°C to +40°C
+50°F to +104°F

Material-Halogen Free:

Polycarbonate,
self extinguishing class VO (UL 94)

Operating temperature range

-40°C to +130°C
-40°F to +266°F

Use the MG2-EPTR PREMIUM ribbon to print -HF items.

MG2-VRT-AH

self adhesive, customisable

SELF ADHESIVE

Predrilled with holes Ø 4mm

Size mm	white	yellow	red	blue	black	N°holes	Plates for sheet	Quantity	SW Code
25x140	88927	88427				2	4	100	871
29x140	88943				88143	2	3	75	834
35x142	88939					2	3	75	835
40x150	88968	88468				2	2	50	781
50x140	88919			88619		4	2	50	872
50x150	88956					4	2	50	843
82x142	88938					4	1	25	836
102x138			88237	88637		4	1	25	208

MG2-VRT-AH offer larger sizes and greater print area.

CONSULT US FOR

- OTHER COLOURS
- SPECIAL SHAPES
- PLATES PREPRINTED IN **FULL COLOUR** WITH YOUR COMPANY LOGO (see page 44)

USE

Directly on suitable surfaces

