

96642694 NOVALINE LED1800-830 HF WH

LED 16W LED_NOVN_1800_3K	EN 60598	IP40			850 °C
---------------------------------	----------	------	---	---	--------


Novaline

A round bulkhead LED luminaire. Electronic, fixed output control gear. Body and bezel: white finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. Complete with 3000K LED.


Dimensions: Ø455 x 105 mm
 Total power: 15.5 W
 Luminaire luminous flux: 1600 lm
 Luminaire efficacy: 103 lm/W
 Weight: 2.14 kg



TLG_NOVN_F_1000LEDWALLPDB.jpg

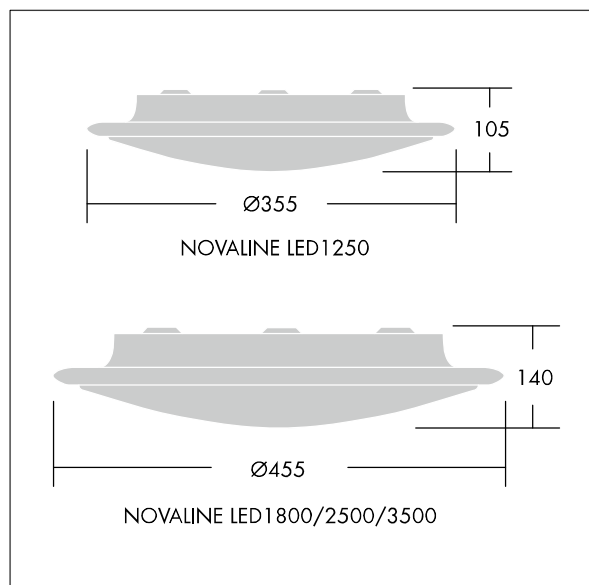

TLG_NOVN_M_LED2.wmf

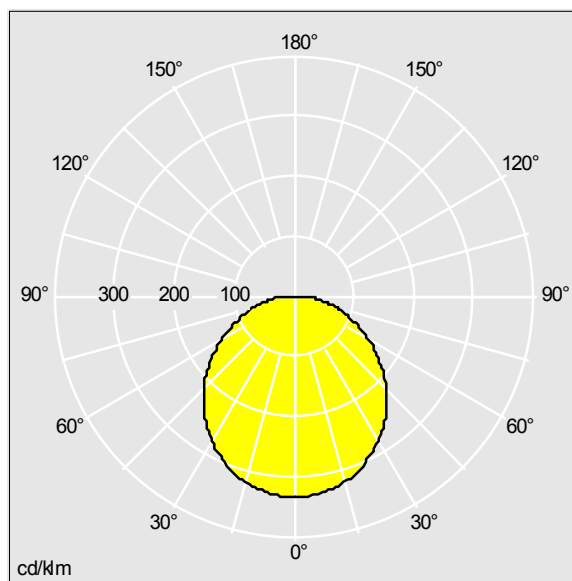

TLG_SP_0042294.idt

Lamp position: STD - standard
 Light Source: LED
 Total luminous flux*: 1600 lm
 Luminaire efficacy*: 103 lm/W
 Lamp efficacy: 103 lm/W
 Colour Rendering Index min.: 80
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam)*: 3
 Rated median useful life*: 50000h L90 at 25°C
 Ballast: 1x HF_ Tridonic
 Luminaire input power*: 15.5 W
 Dimming: Fixed output
 Maintenance category: D - Enclosed IP2X
 LOR: 1,00 ULOR: 0,03 DLOR: 0,97

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© Thorn Lighting