

Order Code: COM015

Photometric Data

Lumens	4700
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	134
Colour Temperature (K)	4000 - 4000
SDCM	<4
Beam Angle (°)	120 x 120
UGR	<21
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life @ 25°C (Hrs)	50000
Rated Life L80/B50 @ 25°C	50000

Electrical Data

Input (W)	35
Input (V)±10%	220 - 240
Voltage Type	AC
Input Current (A)	0.18
Power Factor	0.95
THD (%)	<15
Inrush (A) (peak)	10
Inrush Duration Ipk/2 (µs)	80
No. Per C16 Breaker	60
Electrical Class	I
Connector Type	Push Terminal
Short Circuit Protection	Yes
Thermal Overload Protection	Yes
Type of Wiring	Suitable for Through Wiring
Wiring X-sec (mm²)	1.5
Non-dimmable	Yes
ECA Compliant	Yes

Physical Data

Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Steel
Length (mm)	1500
Width (mm)	175
Height/Depth (mm)	75
Weight (kg)	3.2
Warranty (year)	5
Case Material	Steel
Suitable for ceiling mounting	Yes
Suitable for surface mounting	Yes
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic
Impact Strength	IK03

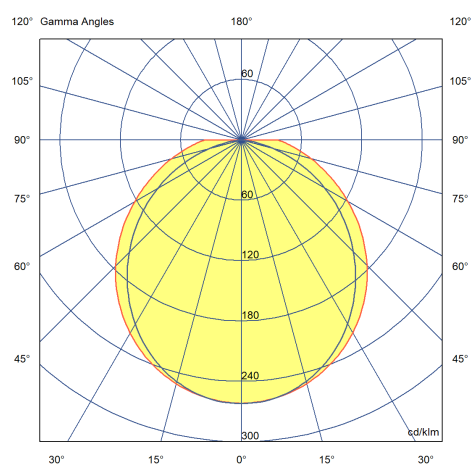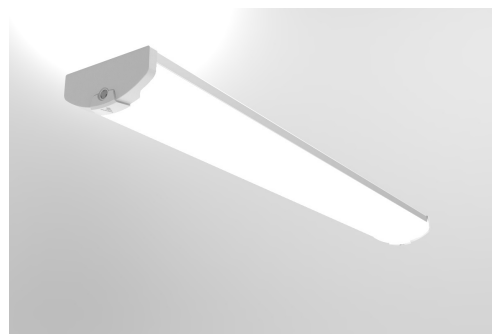

Order Code: COM015

Environmental Data

Ambient Rated Temperature Range (°C)	-20 to 45
--------------------------------------	-----------

Accessories

ACS067 - Programming Remote for SL and SH Sensors
ACS030 - Commissioning Remote for SL and SH Sensors
ACS153 - Programming Remote for SB Sensor
ACS198 - Suspension kit for VAcademy