


### 2 GANG SOCKET OUTLET WITH 1XUSB TYPE C & 1XUSB TYPE A

Part Number (2501425327 |  
NLS8300/S2USBC)

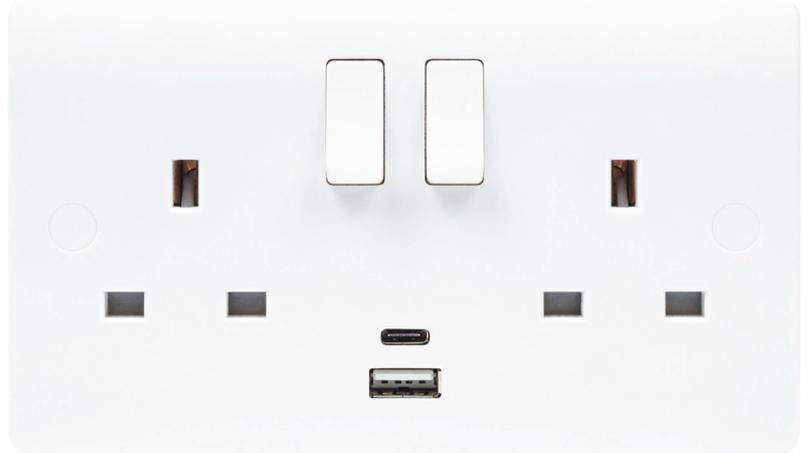

### Product Description

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

DESCRIPTION	
Material Composition	
Front Plate	Urea
Rear Housing	Urea
Terminals	Brass
Internal Mechanism	Formed Press Brass Silver "on-lay" Copper / Brass Contacts
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated

DESCRIPTION	
Voltage	240V ~ 50Hz
Current Rating	13A
Torque Value	2.0Nm
Cable Size	4 x 2.5mm <sup>2</sup>
Back Box Depth	25mm
Anti Microbial Certified	Yes
USB Charging Output	5V DC, 3.1A
USB Output Connector	1x USB Type "A" & 1x USB Type "C"
USB Standby Current	2mA
Switched	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Dimensions	86x146x9.5mm (HxWxD)
Standards	BS 1363-2:1995+A4:2012, EN 61000-6-1:2007 EN 61000-6-3:2007+A1:2011 The EMC directive 2014/30/EU BSEN 60950

### Dimensions

