


13A 2 GANG SWITCHED SOCKET RCD PROTECTED (LATCHING)

Part Number (2501425302 |
NLMC8400/2RCD)

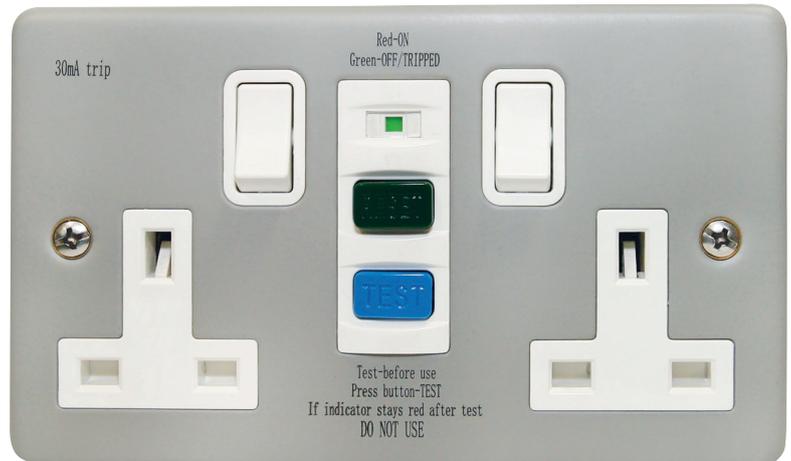

Product Description

A comprehensive range of metal clad wiring accessories for use in the most demanding environments. Manufactured from heavy duty steel and finished in satin silver.

| DESCRIPTION | |
|----------------------|--|
| Material Composition | |
| Front Plate | Mild Steel |
| Rear Housing | PC |
| Terminals | Brass |
| Internal Mechanism | Formed Press Brass Silver "on-lay" Copper / Brass Contacts |
| Earth Strap | Mild Steel |
| Terminal Screws | Steel & Yellow Passivated |

| DESCRIPTION | |
|-------------------------|--|
| Knockouts | 8 x 20mm, (2 x 3) (2 x 1) |
| Voltage | 240V ~ 50Hz |
| Current Rating | 13A |
| Torque Value | 2.0Nm |
| Cable Size | 3x2.5mm ² , 2x4.0mm ² , 1x6mm ² |
| Breaking Capacity | 250A |
| Short Circuit Withstand | 1500A |
| RCD Type | A |
| Switched | Yes |
| Double Pole | Yes |
| Twin Earth | Yes |
| IP Rating | IP20 |
| Operational Temperature | -5 ° to +40 °C |
| RCD Protection | 30mA 40ms |
| Standards | BS1363, BS7288-2016 |
| Mounting | Surface |

Dimensions

