



CYC040TDC25-70

Multifunction Driver, DALI, 1-10V, Primary PUSH, 40W



Features

Multiple constant current output selections (250-700mA)

DALI dimmable

1-10V dimmable

Primary PUSH button dimmable

Flicker-free

Push-fit terminals

Output overload protection with automatic restart

Output short-circuit shutdown with automatic restart

Overheating protection.

Class II IP20 independent driver

SELV equivalent

Synchronisation function for up to 15 drivers

Specifications

Shape / Type	Driver
Colour Finish	
Max Load (w)	40
Input Voltage	220-240 Vac
Input Frequency (Hz)	50/60
Dimmable	DALI (300m max), 1-10V (20m max), Primary PUSH (20m max)
Dimming Mode	DALI, 1-10V, Primary PUSH
Power Factor Correction	Two Stage
IP Rating	IP20
Class Protection	Class II
Input Connection	Push-fit terminals 0.75-1.5mm ²
Output Connection	Push-fit terminals 0.75-1.5mm ²
Output Voltage (Vdc)	6-58
Output Current (mA)	250-700
Max. Input Power (W)	45.5 (<0.5 stand-by)
Max. Input Current (mA)	204
Inrush Current (A)	15 (max)
Inrush Pulse Time (microseconds)	100
Length (mm)	123
Width (mm)	79
Height (mm)	23.5
Maximum Case Temperature (°C)	85
Ambient Temperature (°C)	-20 to 50
Leakage Current 3KVac (mA)	1
Turn On Time (seconds)	2.13


Unit D2 Kennetside, Bone Lane
Newbury, Berkshire

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>


Turn Off Time (seconds)	0.1
Hold-on Time	7 ms
Barcode	5060063429854

Packaging

Outer Box Length (mm)	450
Outer Box Width (mm)	370
Outer Box Height (mm)	420
Volume	0.06993
Box Quantity	100
Outer Box Weight (kg)	20

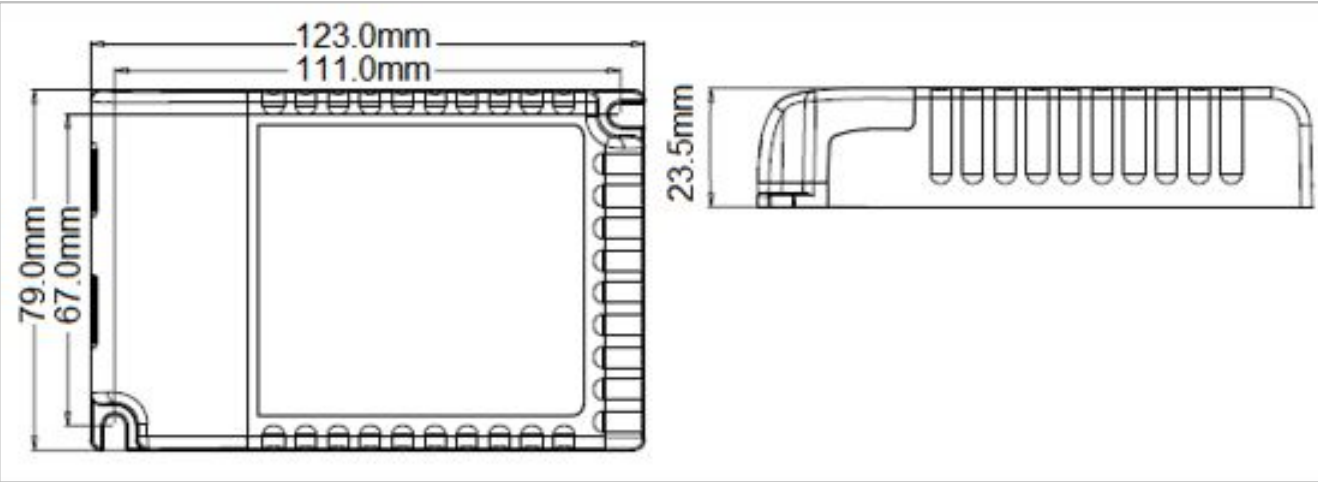

DALI Dimming

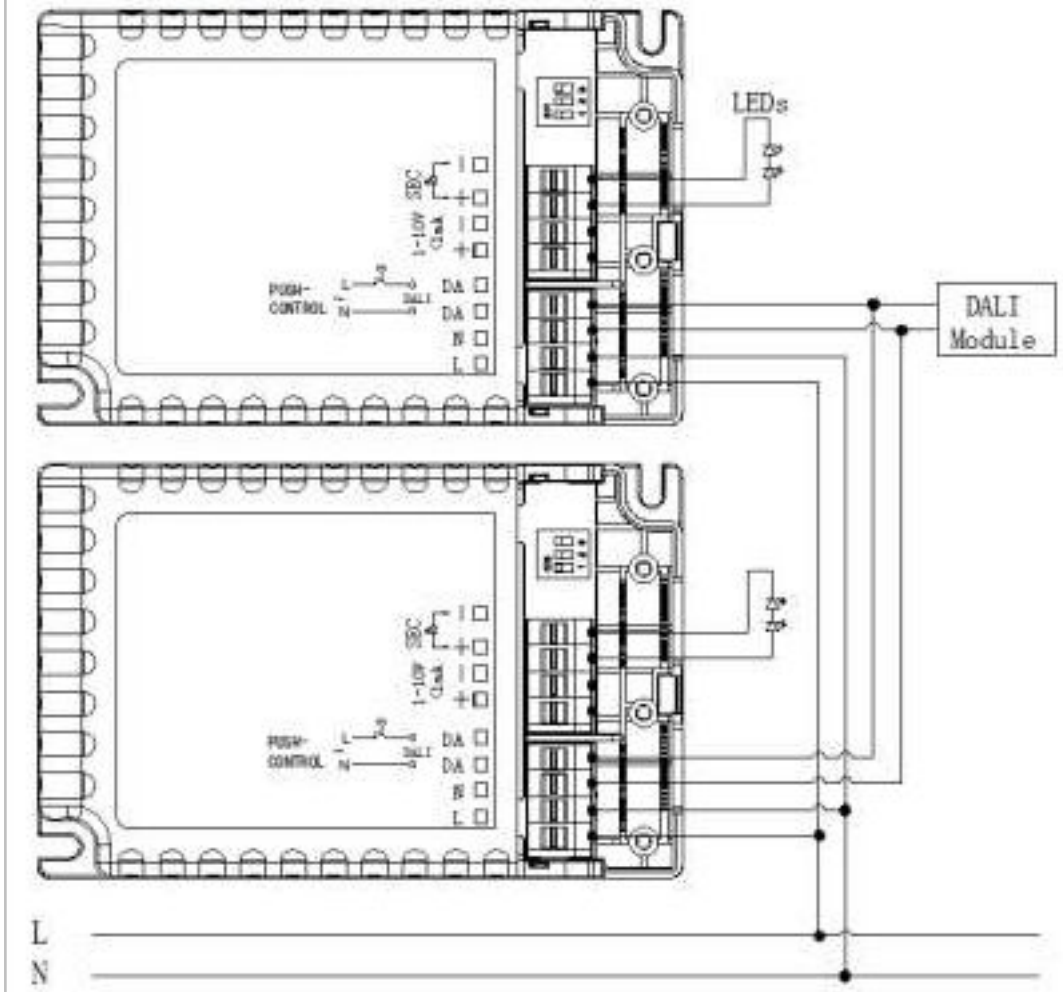

Datasheet generated from <https://onetimepim.com> last updated Tuesday, October 5, 2021 11:56:37 AM

1-10V Dimming

