

Roma Select

Commercial Lighting



Data Sheet

Product Information

The Roma SF Select surface fittings are the ultimate bulkhead solution, as standard fittings are triple CCT & multi wattage selectable. Selectable for 3000, 4000 or 6000K and 10w, 14w & 20w outputs.

They are suitable depending on rim choice to be mounted internally or externally.

Comes with a 5 year warranty.

Product Features

- 5 year warranty
- Class II
- IP65/IK10
- Colour Temperature & Wattage selectable 3000K, 4000K or 6000K LED and 10w, 14w & 20w outputs
- CRI: Ra>87
- Up to 119 lumens per circuit Watt
- Wall or ceiling mountable
- Emergency versions available
- Microwave version available
- Suitable for Beza Box mounting
- Two Rim options, White and Chrome
- L70 - 40,000hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KRSF400	Roma Select LED Multi Wattage Triple CCT Surface Fitting	10	3000	1067	85	F	II
			4000	1170	87		
			6000	1125	84		
		14	3000	1341	85	F	II
			4000	1526	87		
			6000	1443	84		
		20	3000	1719	85	F	II
			4000	1962	87		
			6000	1782	84		
KRSF401	Roma Select LED Multi Wattage Triple CCT Surface Fitting with Integral Emergency	10	3000	1067	85	F	II
			4000	1170	87		
			6000	1125	84		
		14	3000	1341	85	F	II
			4000	1526	87		
			6000	1443	84		
		20	3000	1719	85	F	II
			4000	1962	87		
			6000	1782	84		
KRSF402	Roma Select LED Multi Wattage Triple CCT Surface Fitting with Microwave Sensor	10	3000	1067	85	F	II
			4000	1170	87		
			6000	1125	84		
		14	3000	1341	85	F	II
			4000	1526	87		
			6000	1443	84		
		20	3000	1719	85	F	II
			4000	1962	87		
			6000	1782	84		
KRSF403	Roma Select LED Multi Wattage Triple CCT Surface Fitting with Microwave Sensor and Integral Emergency	10	3000	1067	85	F	II
			4000	1170	87		
			6000	1125	84		
		14	3000	1341	85	F	II
			4000	1526	87		
			6000	1443	84		
		20	3000	1719	85	F	II
			4000	1962	87		
			6000	1782	84		

Multi wattage output	10w Output	14w Output	20w Output
Nominal voltage	220~240VAC	220~240VAC	220~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	9.8w including driver losses	13.4w including driver losses	18.2w including driver losses
Circuit Current	TBC	TBC	TBC
Driver mA Rating	175mA Max	175mA Max	175mA Max
PFC	>0.9	>0.9	>0.9
In Rush Current	TBC	TBC	TBC
Ambient temperature range	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Start time	< 0.5 sec	< 0.5 sec	< 0.5 sec
IK rating	10	10	10
IP rating	65	65	65

Construction

Body:	Polycarbonate
Diffuser:	Polycarbonate
Rim:	ABS


Standards

BSEN60598-1:2021	Luminaires – Part 1: General requirements and tests
BSEN60598-2-22:2014+A1 2020	Luminaires – Part 2: Luminaires for Emergency Lighting

In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/2020/EC
RoHS	Restriction of hazardous substances 2015/863/EU

Product Dimensions

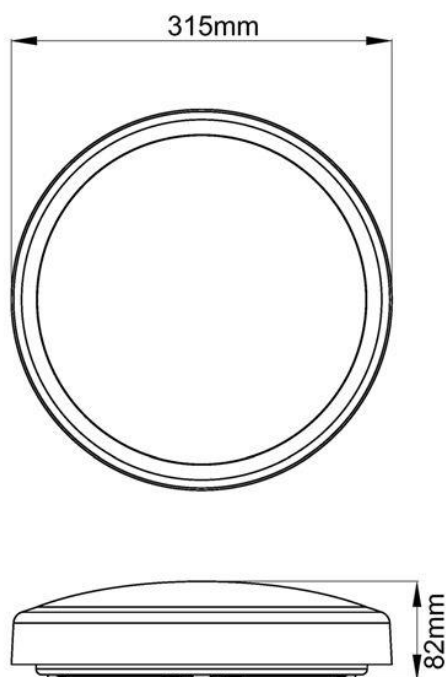

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.