


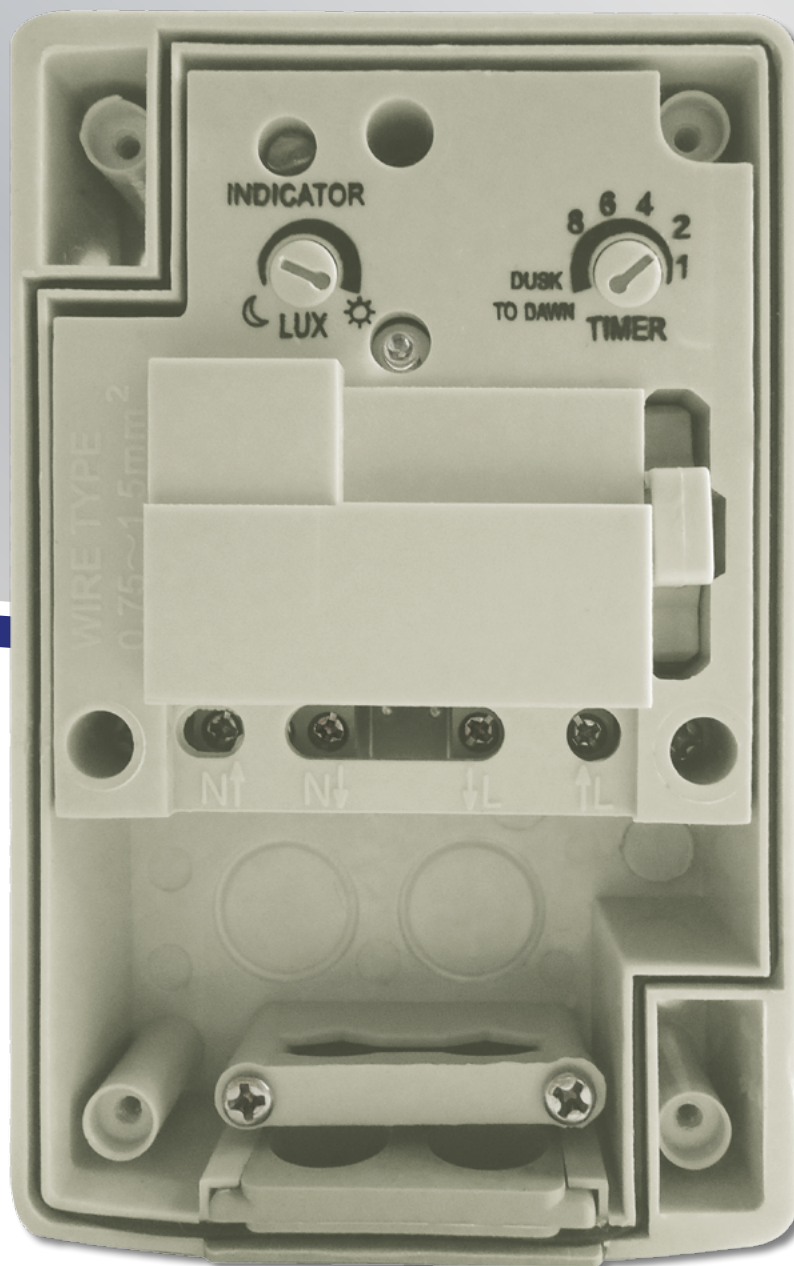

EXTERNAL PHOTOELECTRIC SWITCH

- ABS construction
- Switching level adjustable between approx. 5-300 lux
- 10 Amp resistive, 3 Amp inductive load
- Run back timer adjustable to stay on between 1-8 hours after switch on: flexibility in operation for economic running costs
- Maximum 250W LED load capacity (no more than ten lights)

• M.O.M: 1 / O.P.Q: 5

Code	Colour	IP Rating
RDT10A	Grey	IP44

