

CATALOGUE RANGE: ■ EMERGENCY

LUMEN OUTPUT:
Output Mains: 133.9 lm
Output Battery: 75 lm



8W T5 3 HOUR MAINTAINED / NON MAINTAINED EMERGENCY BULKHEADS

- Requires 1 x 8W G5 T5 300mm fluorescent tube (included). Fitting is rated at 8W max
- Polycarbonate construction
- Dedicated self adhesive legend pack included: allows multiple exit path designation options
- Hinged gear tray: easy installation & maintenance
- Internal or external use

YD630M:

- Facility for non-maintained mode
- Facility for remote switching

ADDITIONAL LEGEND SET (LGDSET):

- Strong self adhesive labels
- Combination of symbols to suit actual exit paths
- Can be used as an additional Legend Set or as individual stickers for walls and doors




SEMI RECESSED BULKHEAD FRAME:

- Pressed steel construction
- For use with emergency bulkheads YD630M / YD630NM
- Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 355mm x 120mm

- **Fitting / Legend** = M.O.M: 12 / O.P.Q: 12
- **Frame** = M.O.M: 3 / O.P.Q: 12



LGDSET included

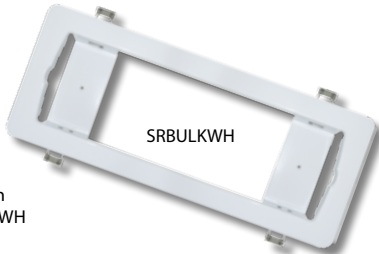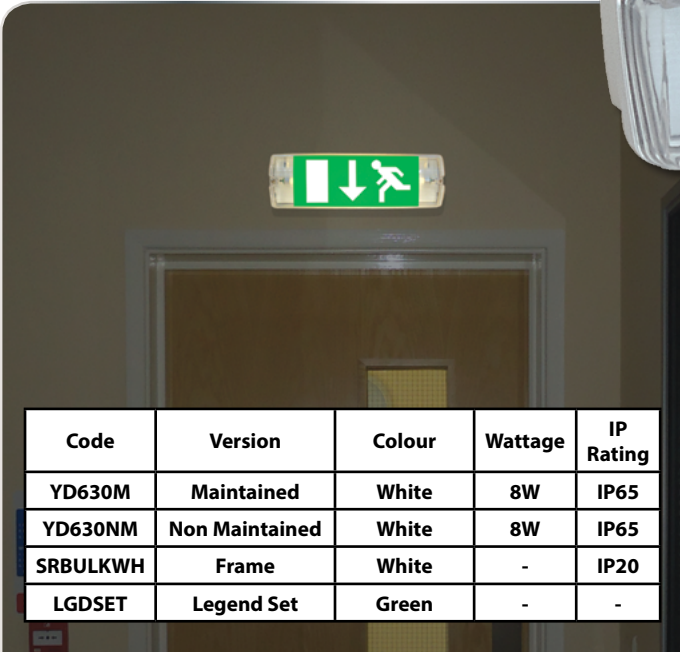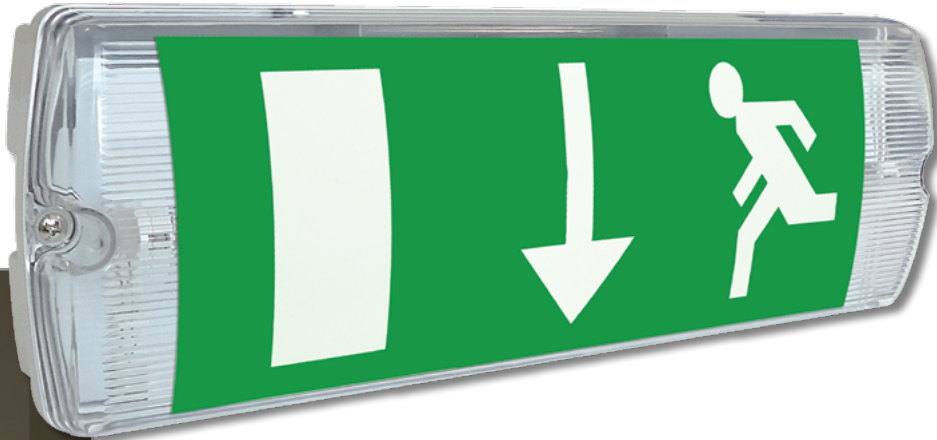

Fitting shown with SRBULKWH

