

Code	kwh / 1000h
N64/1	7.80
N64/3	12.67
N64/5	19.74
N64/7	24.31

Eterna TUS Range



This luminaire is compatible with bulbs of the energy classes:




This luminaire is sold with a bulb of the energy class: **A**

874/2012



2M mains link lead included

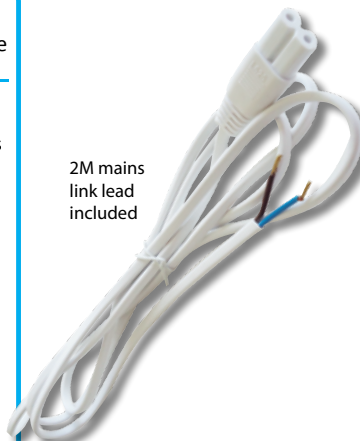

Fixing clips included

LAMP SPECIFICATIONS:	TUS6NL N64/1	TUS10NL N64/3	TUS16NL N64/5	TUS20NL N64/7
Nominal Wattage	6W	10W	16W	20W
Rated Wattage	6W	10W	16W	20W
Average lifetime hours	10,000 hrs	10,000 hrs	10,000 hrs	10,000 hrs
Nominal useful luminous flux	378 lm	630 lm	1090 lm	1500 lm
Rated luminous flux	378 lm	630 lm	1090 lm	1500 lm
Luminous efficacy (Lm/W) in 50Hz operation	63	63	67	75
Rated lamp Lumen maintenance	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%
Rated survival factors	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%
Lamp dimensions (mm)	220mm	341mm	468mm	567mm
Cap type	T4	T4	T4	T4
Lamp Mercury content to an accuracy of 0.1mg	<2mg	<2mg	<2.5mg	<2.5mg
Colour rendering index Ra	83.2	82.9	81.8	82.5
Colour temperature	3400K	3400K	3400K	3400K
Ambient temperature required to achieve maximum luminous flux	25°C	25°C	25°C	25°C
Dimmable	No	No	No	No
Ballast EEL	A2	A2	A2	A2


LINEAR T4 LINKABLE TRIPHOSPHOR UNDER CABINET FITTINGS

- **TUS6NL** requires 1 x 6W G5 T4 220mm fluorescent tube (included). Fitting is rated at 6W max
- **TUS10NL** requires 1 x 10W G5 T4 341mm fluorescent tube (included). Fitting is rated at 10W max
- **TUS16NL** requires 1 x 16W G5 T4 468mm fluorescent tube (included). Fitting is rated at 16W max
- **TUS20NL** requires 1 x 20W G5 T4 567mm fluorescent tube (included). Fitting is rated at 20W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Polycarbonate construction
- Individual rocker switch
- Link & light system compatible
- Incorporates plug and socket with through wiring: can be linked with up to 5 other fittings
- 2 metres link mains lead included
- See product codes NL1WH / NL50WH / NL25WH for additional link leads


REPLACEMENT LAMPS (N64 RANGE):

- Specifically designed for use with Eterna® brand fittings

- **Fittings** = M.O.M: 5 / O.P.Q: 50
- **6W / 10W / 16W Lamps** = M.O.M: 10 / O.P.Q: 200
- **20W Lamps** = M.O.M: 10 / O.P.Q: 100
- **Link Leads** = M.O.M: 5 / O.P.Q: 200



Additional link leads available (NL Range)

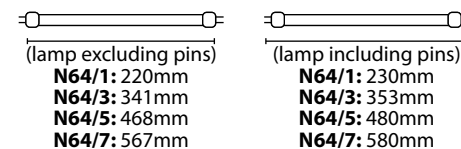

Code	Version	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
TUS6NL	Fitting	White	6W	3400K	378 lm	10,000 hrs	IP20	A
TUS10NL	Fitting	White	10W	3400K	630 lm	10,000 hrs	IP20	A
TUS16NL	Fitting	White	16W	3400K	1090 lm	10,000 hrs	IP20	A
TUS20NL	Fitting	White	20W	3400K	1500 lm	10,000 hrs	IP20	A
N64/1	Lamp	White	6W	3400K	378 lm	10,000 hrs	-	A
N64/3	Lamp	White	10W	3400K	630 lm	10,000 hrs	-	A
N64/5	Lamp	White	16W	3400K	1090 lm	10,000 hrs	-	A
N64/7	Lamp	White	20W	3400K	1500 lm	10,000 hrs	-	A
NL1WH	1M Lead	White	-	-	-	-	IP20	-
NL50WH	500mm Lead	White	-	-	-	-	IP20	-
NL25WH	250mm Lead	White	-	-	-	-	IP20	-