

MICROWAVE SENSOR CONTROLS

DETECTION AREA			
	1	2	
I	●	●	100%
II	●	○	75%
III	○	●	50%
IV	○	○	10%
KEY: ON: ● OFF: ○			

HOLD TIME			
	3	4	
I	●	●	5s
II	●	○	90s
III	○	●	5min
IV	○	○	15min
KEY: ON: ● OFF: ○			

DAYLIGHT SENSOR			
	1	2	
I	●	●	Disable
II	●	○	50 Lux
III	○	●	10 Lux
IV	○	○	2 Lux
KEY: ON: ● OFF: ○			



MICROWAVE SENSOR


This sensor can either be wired directly into an existing fitting providing there is sufficient space to do so or alternatively it can be installed inside a separate unobtrusive enclosure, see Eterna part code MWCASE.

- Polycarbonate construction
- Rated Load - 800W (resistive), 400W (capacitive), 270W (LED)
- Adjustable detection angle: 30-150°
- Power consumption: <0.5W
- Adjustable detection range: Max. 10m
- Adjustable time setting: 5 seconds - 15 minutes
- Adjustable Lux control: 2-50 lux
- Push connect terminals: for ease of connection

ENCLOSURE FOR MICROWAVE SENSOR

- Polycarbonate construction
- Compact & discreet design: for housing Eterna part code MWSENSOR
- IP65, ceiling or wall mounted: giving versatile fixing options, suitable for bathroom, internal and external use
- Supplied with two mounting screws to install MWSENSOR and has 2 x 20mm gland entry holes: facilitating easy installation
- Screw fit cover to maintain IP rating, with clip on bezel: meaning enclosure cannot be tampered with easily

- **MWSENSOR** = M.O.M: 1 / O.P.Q: 150
- **MWCASE** = M.O.M: 1 / O.P.Q: 100

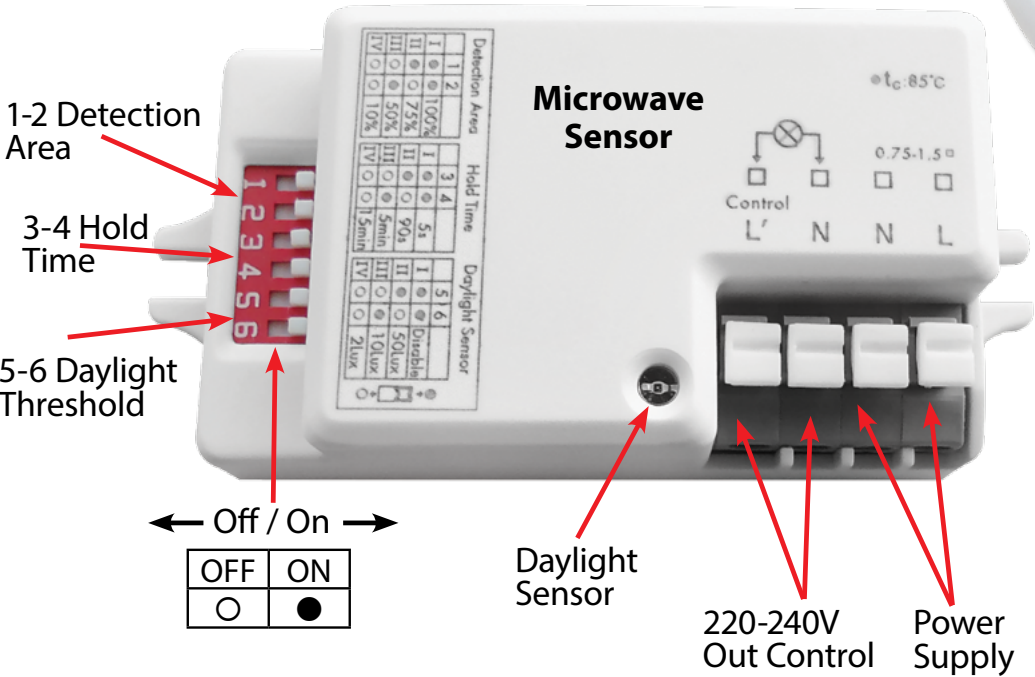

Code	Version	Colour	IP Rating
MWSENSOR	Sensor	White	-
MWCASE	Case	White	IP65

