



This luminaire contains built-in LED lamps.




The lamps cannot be changed in the luminaire.

874/2012



LED LAMP SPECIFICATIONS:

Lumens total flux	1800 lm
Rated Wattage	20W
Rated luminous flux	1800 lm
Nominal life time of the lamp	25,000 hrs
Colour temperature	3000K
Number of switching cycles before premature lamp failure	20,000
Warm-up time up to 60 % of the full light output	Instant full light
Dimmable	No
LED strip dimensions (L/W)	270 x 60mm
Nominal beam angle	160°
Rated power	20W
Rated lamp lifetime	25,000 hrs
Lamp power factor	0.85
Lumen maintenance factor at end of nominal life	70%
Starting time	<0.5s
Colour rendering	>80
Colour consistency	Within 6 step Macadam ellipse
Rated peak intensity	540cd
Rated beam angle	160°
Voltage	240V





PERLED20 Illuminance Area

EXAMPLE FOR MEDIUM TRAFFIC PARKING AREAS

>=10 LUX AVERAGE

Office buildings • Plants • Sports & Multipurpose Building Complexes

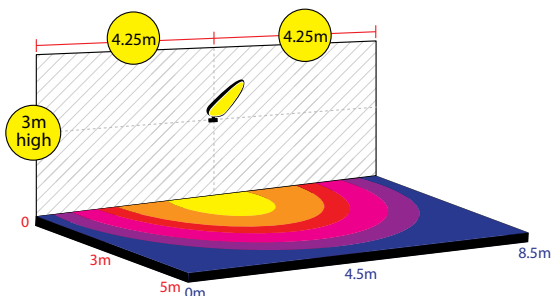

Based On Maintenance Factor 0.8




EternaPro
LED
5 YEAR
Extended Warranty
Available on application

20W LED PERIMETER LIGHT

High output, low power, corrosion resistant wall mounted LED area lighting fixture which is ideal for lighting building perimeters. When mounted at 3 metre high each fixture can illuminate an area of 8.5 metre (W) 5 metre (D).

- Polycarbonate housing and diffuser
- Pre-wired with 1 metre cable & connection box
- Integral photocell which can be bypassed on installation to allow normal on / off switching
- 2 part, easy fixing wall mounting bracket
- Optically optimised diffuser
- High 90 lm / Watt output
- IES file available
- CRI >80
- M.O.M: 1 / O.P.Q: 12



Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
PERLED20	White	20W	3000K	1800 lm	25,000 hrs	IP65	A+