


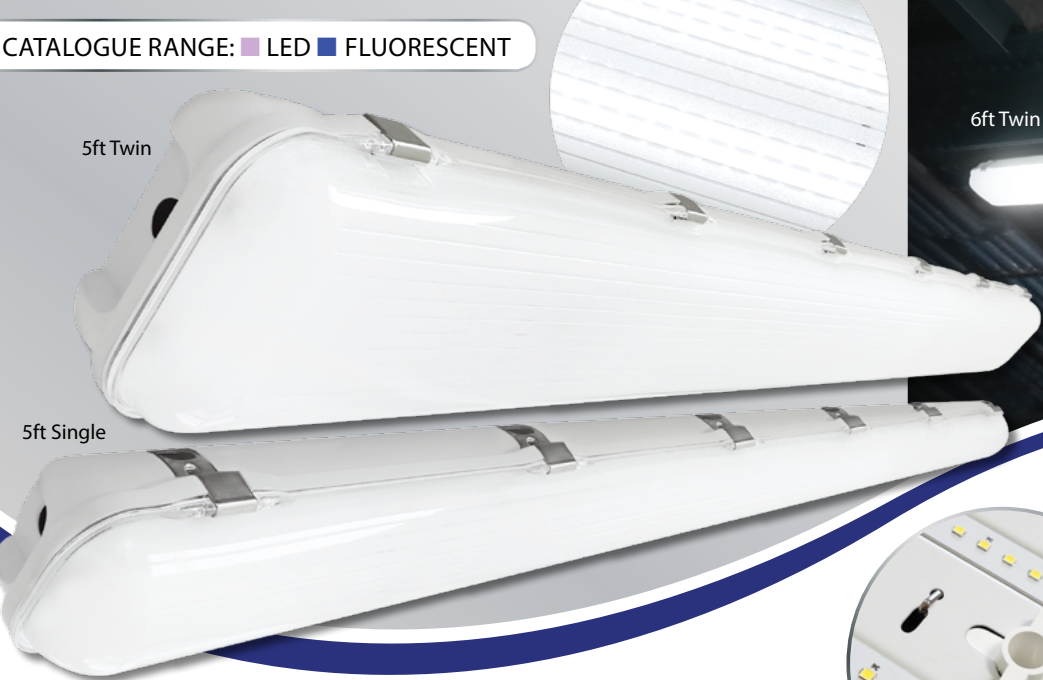

6ft Twin

5ft Twin

5ft Single

Emergency Push-fit terminal block

Mounting bracket & hanging clip

Twin


Gear tray clips

6ft Single

Gear tray strap (single shown)

Diffuser clip

Download IES File from website



SINGLE/TWIN 5FT/6FT LED WEATHERPROOF FITTINGS



Superb one for one replacement for traditional fluorescent fixtures.

- Polycarbonate housing and diffuser
- Multiple fixing options - supplied with surface mounting brackets and suspension hooks
- Gear tray retaining strap for easy installation
- IES files available
- Push-fit terminal block
- Stainless steel clips

EMERGENCY VERSIONS:

- 3 hour duration maintained operation: facility for non-maintained mode or remote switching


- **Single** = M.O.M: 1 / O.P.Q: 6
- **Twin** = M.O.M: 1 / O.P.Q: 4

Code	Version	Colour	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
WPLED51	Single 5ft	Grey	30W	5000K	3000 lm	30,000 hrs	IP65	A ⁺
WPLED52	Twin 5ft	Grey	60W	5000K	6000 lm	30,000 hrs	IP65	A ⁺
WPLED61	Single 6ft	Grey	40W	5000K	4000 lm	30,000 hrs	IP65	A ⁺
WPLED62	Twin 6ft	Grey	80W	5000K	8000 lm	30,000 hrs	IP65	A ⁺
MAINTAINED EMERGENCY 5FT LED WEATHERPROOF FITTINGS:								
WPLEDEM351	Single 5ft	Grey	30W	5000K	3000 lm	30,000 hrs	IP65	-
WPLEDEM352	Twin 5ft	Grey	60W	5000K	6000 lm	30,000 hrs	IP65	-

EternaPro
LED
5 YEAR
Extended Warranty
Available on application

Eterna WPLED

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012

LED SPECIFICATIONS:	SINGLE 5FT	TWIN 5FT	SINGLE 6FT	TWIN 6FT
Luminaire lumens (with diffuser)	3000 lm	6000 lm	4000 lm	8000 lm
Lumens from chip (no diffuser)	3600 lm	7200 lm	4800 lm	9600 lm
Rated Wattage	30W	60W	40W	80W
Rated luminous flux	3000 lm	6000 lm	4000 lm	8000 lm
Nominal life time of the lamp	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs
Colour temperature	5000K	5000K	5000K	5000K
Number of switching cycles before premature lamp failure	≥15,000	≥15,000	≥15,000	≥15,000
Warm-up time up to 60 % of the full light output	Instant full light	Instant full light	Instant full light	Instant full light
Dimmable	No	No	No	No
LED strip dimensions (L)	1 x 5ft	2 x 5ft	1 x 6ft	2 x 6ft
Nominal beam angle	120°	120°	120°	120°
Rated power	30W	60W	40W	80W
Rated lamp lifetime	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs
Lamp power factor	0.9	0.9	0.9	0.9
Lumen maintenance factor at end of nominal life	>70%	>70%	>70%	>70%
Starting time	<0.5s	<0.5s	<0.5s	<0.5s
Colour rendering	80	80	80	80
Colour consistency	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse
Rated peak intensity	812 cd	1922 cd	1425 cd	2768 cd
Rated beam angle	120°	120°	120°	120°
Voltage	240V	240V	240V	240V

Not suitable for accent lighting