
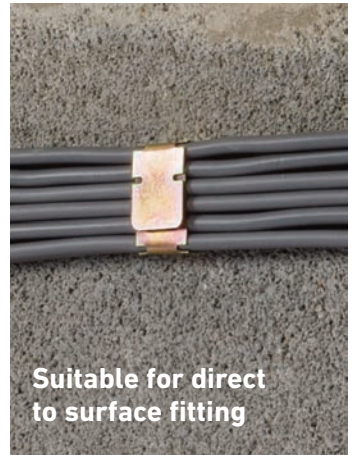


Safe-D 40 Fire Rated Clips For 38mm+ Trunkings


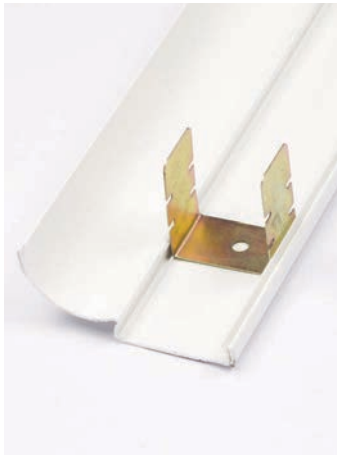


Suitable for direct to surface fitting

Safe-D40 Clips are popular for fitment in 38mm or 40mm non-metallic trunking bases, or to provide a first-fix solution for securing cables direct to surfaces.

Installers should use a fire-rated fixing, and then simply fold-over tabs to secure cables. **1st fix clips, then 2nd fix cables!**

- Certified for 2 hours at 970°C
- Fully safety tested and certified to BS5839 part 1 compliant
- Thumb friendly, easy fold side-tabs
- Passivated non-corrosive coating
- Ideal for ceiling voids, or popular PVC trunking
- Rounded edges for easy handling

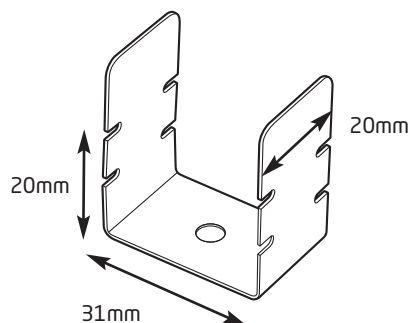

Code

Description

SAFE-D40/50 (L) 20mm x (W) 31mm x (H) 20mm (folded - max height) 6mm diameter pre-drilled hole in base

Safe-D 40 Fire Rated Clips *For 38mm+ Trunkings*

Product Specification

Produced from high temperature steel	• Can withstand temperatures of up to 970°C for 2 hours • Safe-D Clips maintain strength after bending of side-tabs
U-shaped design	• Easy to handle • Side-tabs fold-over to secure cables
Fold over rounded tabs	• 20mm wide side-tabs & pliable gauge combine for quick and easy folding • Smooth & rounded edges, as required by design code BS7671 s522.8.11, to protect soft-skin cables etc (and user friendly!)
Pre-drilled hole in base (6mm diameter)	• Accepts shot-fire or screw-fixed steel fixings (Select suitable fixing type according to substrate)
Passivated finish	• Protects against corrosive elements
Fully tested & certified	• Complies with requirements of BS5839 part 1 (2002 section 26.2d); BSEN50200:2000; & BS8434-1:2003
Weight	• 7.6g Each 0.36kg Pack of 50