

DIRECT/INDIRECT LED PANEL**PRODUCT DESCRIPTION**

LED 600 x 600 direct/indirect fitting in standard mains, emergency and dimming versions. With its attractive and distinctive design this product presents customers with the opportunity to install something other than a standard flat panel.

KEY FEATURES



- For recessed installation in 15-24mm exposed T ceilings
- Back-lit design
- Opal acrylic diffuser in a steel body
- Supplied complete with integral driver

TECHNICAL DETAILS

- 28W, 3,420 lumens, 122 luminaire lumens/circuit watt
 - CRI >80
 - CCT 4000K
 - Emergency version available as listed
 - Dimming version available
 - Class I
 - 5 year warranty
-

Part number	Description
LDPAN34840	600X600 3400LM 28W IP20 LED DIRECT/IN-DIRECT PANEL 840
LDPAN34840E3	600X600 3400LM 28W IP20 LED DIRECT/IN-DIRECT PANEL 840 E3

PHOTOMETRIC DATA

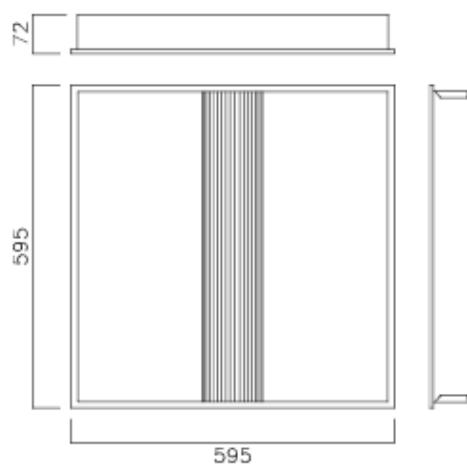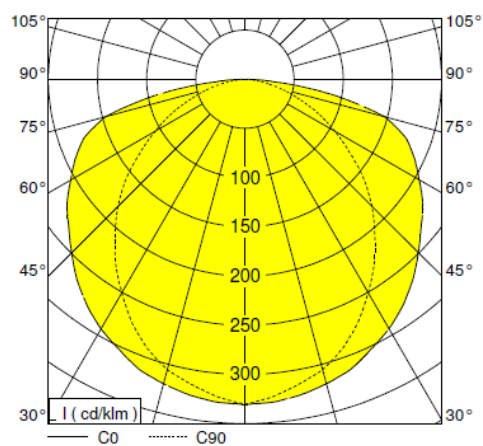

Date completed by manufacturer: 14th July 2017