EvoSIGNAL / EvoSIGNAL Accessories Mini Adapter Installation mount PG29 GY




	260.700.04	
Series:	EvoSIGNAL	U
MECHAN	ICAL DATA	
Height		33 mm
Diameter		62 mm
Materials		PC/ABS
Housing colour		Grey
Protection category		IP66
Cable entry		Through hole
Cable entry maximum		d = 9 mm
Type of fixing		Built-in mounting
Working temperature minimum		-30°C
Working temperature maximum		+60°C
Weight with packaging		32 g
Product weight		28 g
	CAL DATA	
Pollution degree		3
		In the connection area: 2
		Νο
Conforms with CE Conforms with RoHS directive		Fulfills substance restriction
WEFE		
WEEE Conforms with ATEX-directive		No
Conforms with CCC		No
Conforms with UL		
UL Type Rating		cULus Type 12
Conforms with FCC		No
Conforms with IC		No
EAC certificate available		
Conforms with UKCA (Importer)		Yes
Conforms with AS-I		
ICAO Certification		No
Conforms with DNV		No
Conforms with RoHS CN		No
Conforms with VdS		No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

EvoSIGNAL / EvoSIGNAL Accessories Mini Adapter Installation mount PG29 GY

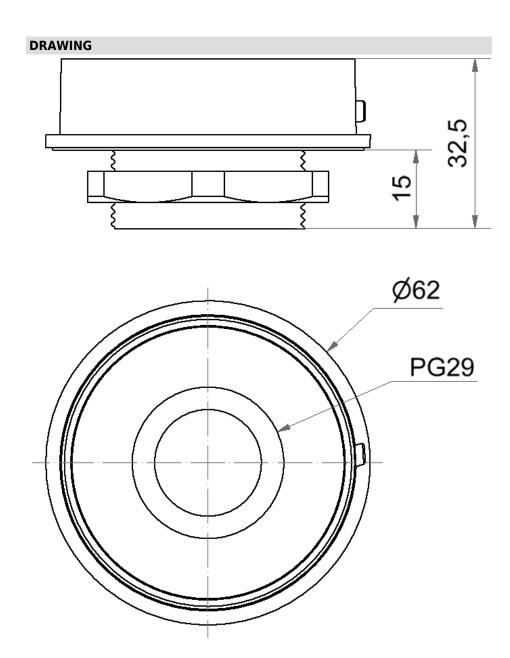

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.