Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC GN/RD



ļ

Part No.:	698.320.75		
Series:	Kompakt 37		
MECHANICAL DATA			
Height		141 mm	
Diameter		38 mm	
Materials		PC	
Dome colour		Clear	
Housing colour		Silver	
Protection category		IP65	
Connection		Cable	
cross-sectional area maximum		0,34mm² / 22AWG	
Cable entry		Membrane grommet	
Cable entry minimum		d = 1 mm	
Cable entry maximum		d = 9 mm	
Cable length		2000 mm	
Tension relief		Pull-out protection	
Type of fixing		Built-in mounting	
Working temperature minimum		-20°C	
Working temperature maximum		+50°C	
Weight with packaging		154 g	
Product weight		123 g	
ELECTRICAL DATA			
Operating voltage		24V	
Operating voltage type		AC/DC	
Operating voltage frequency		50Hz	
Operating voltage tolerance		+/- 10%	
Rated operational voltage		24 VDC	
Rated operational current		70 mA	
Rated inrush current		500 mA	
Protection class		Protection class 2	
Pollution degree		3 In the connection area: 2	
OPTICAL DATA			
Light source		LED	
Light colour		Green Red	
Optical signal image		Permanent	
Service life optical		50,000 h maximum	
APPROVAL DATA			
Conforms v	vith CE	Yes	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC GN/RD

Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC GN/RD

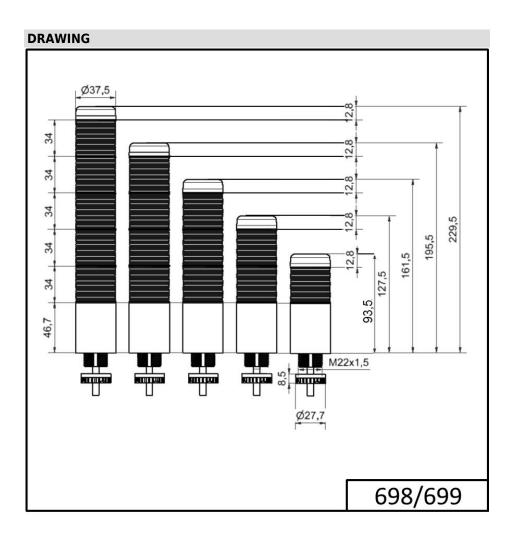

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.