


# JZ-500 HMH-C

flexible control cable, halogen-free, extremely fire resistant<sup>1)</sup>, screened, meter marking, EMC-preferred type

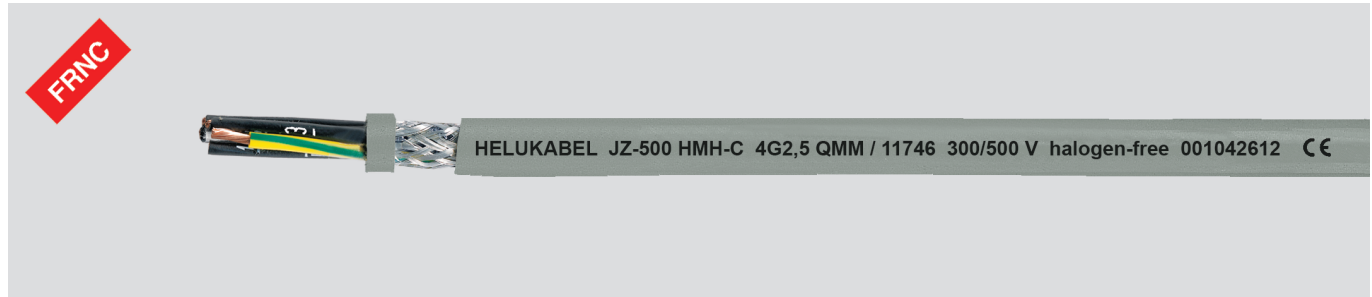

## Technical data

- Halogen-free flexible cable adapted to DIN VDE 0285-525-2-51 / DIN EN 50525-2-51 and DIN VDE 0285-525-3-11 / DIN EN 50525-3-11
- **Temperature range**  
flexing -15°C to +70°C  
fixed installation -40°C to +70°C
- **Nominal voltage**  
U<sub>0</sub>/U 300/500 V
- **Test voltage**  
core/core 4000 V  
core/screen 2000 V
- **Coupling resistance**  
max. 250 Ohm/km
- **Minimum bending radius**  
flexing 12,5x outer Ø  
fixed installation 4x outer Ø

## Cable structure

- Bare copper conductor, fine wire acc. to DIN VDE 0295 cl.5 / IEC 60228 cl.5
- Core insulation of halogen-free polymer compound type T16 acc. to DIN VDE 0207-363-7 / DIN EN 50363-7
- Core identification to DIN VDE 0293 black cores with continuous white numbering
- GN-YE conductor, 3 cores and above in the outer layer
- Cores stranded in layers with optimal lay length
- Foil wrapping
- Tinned copper braided screen, approx. 85% coverage
- Outer sheath of halogen-free polymer compound type TM7 acc. to DIN VDE 0207-363-8 / DIN EN 50363-8
- Sheath colour: grey (RAL 7001)
- With meter marking

## Properties

- <sup>1)</sup> For critical applications, we recommend a consultation
- The materials used during manufacturing are cadmium-free, contain no silicone and are free from substances harmful to the wetting properties of lacquers

## Tests

- Flame test acc. to DIN VDE 0482-332-3-24 / DIN EN 60332-3-24 / IEC 60332-3-24
- Flame retardant acc. to DIN VDE 0482-332-1-2 / DIN EN 60332-1-2 / IEC 60332-1-2
- Corrosiveness of combustion gases acc. to DIN VDE 0482-754-2 / DIN EN 60754-2 / IEC 60754-2
- Halogen-free acc. to DIN VDE 0482-754-1 / DIN EN 60754-1 / IEC 60754-1
- Smoke density acc. to DIN VDE 0482-1034-1+2 / DIN EN 61034-1+2 / IEC 61034-1+2

## Note

- G = with GN-YE conductor  
x = without GN-YE conductor (OZ)
- Cleanroom qualification tested with analog type. Please note "cleanroom qualified" when ordering.
- The conductor is metrically constructed (mm<sup>2</sup>). The AWG designation is approximate and purely informative.
- Unscreened analogue type:  
**JZ-500 HMH**

## Application

Connecting and control cables in tooling machinery, conveyor and transportation belts, production lines, in plant construction, air-conditioning systems as well as in iron and steel works. For fixed installation or for flexing applications, for casual, not constantly recurring free movement without forced motion and without tensile stress for medium mechanical loads. The cable is suitable for use in dry, damp and wet environments and on plaster. An interference-free transmission of signals and pulse is assured by the high degree of screening.

**EMC** = Electromagnetic compatibility

To optimize the EMC features we recommend a large round contact of the copper braiding on both ends.

**CE** = Product conforms with Low-Voltage Directive 2014/35/EU.

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
11656	2 x 0,5	5,6	35,0	46,0	20
11657	3 G 0,5	5,9	42,0	56,0	20
11342	3 x 0,5	5,9	42,0	56,0	20
11658	4 G 0,5	6,3	47,0	62,0	20
11343	4 x 0,5	6,3	47,0	62,0	20

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
11659	5 G 0,5	6,8	56,0	75,0	20
11660	7 G 0,5	7,3	69,0	98,0	20
11017510	8 x 0,5	8,0	80,0	115,0	20
11663	12 G 0,5	9,7	108,0	158,0	20
11665	18 G 0,5	11,3	145,0	216,0	20
11667	25 G 0,5	13,4	240,0	315,0	20

Continuation ▶

# JZ-500 HMH-C

flexible control cable, halogen-free, extremely fire resistant, oil resistant<sup>1)</sup>, screened, meter marking, EMC-preferred type



Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
11678	2 x 0,75	6,1	40,0	60,0	19
11679	3 G 0,75	6,4	52,0	68,0	19
11344	3 x 0,75	6,4	52,0	68,0	19
11680	4 G 0,75	6,9	60,0	78,0	19
11345	4 x 0,75	6,9	60,0	78,0	19
11681	5 G 0,75	7,5	71,0	95,0	19
11346	5 x 0,75	7,5	71,0	95,0	19
11682	7 G 0,75	8,3	91,0	130,0	19
11347	7 x 0,75	8,3	91,0	130,0	19
11685	12 G 0,75	10,9	142,0	203,0	19
11687	18 G 0,75	12,8	212,0	290,0	19
11689	25 G 0,75	15,1	281,0	413,0	19
11700	2 x 1	6,4	50,0	66,0	18
11701	3 G 1	6,8	60,0	80,0	18
11348	3 x 1	6,8	60,0	80,0	18
11702	4 G 1	7,3	71,0	100,0	18
11349	4 x 1	7,3	71,0	100,0	18
11703	5 G 1	8,1	88,0	130,0	18
11704	7 G 1	8,7	111,0	160,0	18
11707	12 G 1	11,6	184,0	260,0	18
11709	18 G 1	13,7	260,0	382,0	18
11711	25 G 1	16,2	349,0	540,0	18
11722	2 x 1,5	7,0	63,0	88,0	16
11723	3 G 1,5	7,4	80,0	100,0	16
11350	3 x 1,5	7,4	80,0	100,0	16
11724	4 G 1,5	8,2	97,0	125,0	16
11725	5 G 1,5	8,9	119,0	158,0	16
11726	7 G 1,5	9,8	147,0	210,0	16
11729	12 G 1,5	13,2	267,0	340,0	16
11731	18 G 1,5	15,6	374,0	480,0	16
11733	25 G 1,5	18,2	526,0	702,0	16
11744	2 x 2,5	8,4	96,0	132,0	14
11745	3 G 2,5	8,9	144,0	168,0	14
11746	4 G 2,5	9,9	148,0	195,0	14
11747	5 G 2,5	10,9	181,0	222,0	14
11748	7 G 2,5	11,8	255,0	345,0	14
11751	12 G 2,5	16,1	441,0	572,0	14

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
11766	2 x 4	9,8	120,0	184,0	12
11768	3 G 4	10,4	174,0	238,0	12
11769	4 G 4	11,5	230,0	305,0	12
11770	5 G 4	12,7	273,0	388,0	12
11771	7 G 4	14,2	316,0	504,0	12
11781	2 x 6	11,6	173,0	270,0	10
11782	3 G 6	12,5	240,0	328,0	10
11783	4 G 6	14,1	305,0	416,0	10
11784	5 G 6	15,5	439,0	510,0	10
11785	7 G 6	17,0	505,0	670,0	10
11786	2 x 10	14,6	255,0	420,0	8
11787	3 G 10	15,7	350,0	495,0	8
11788	4 G 10	17,4	535,0	785,0	8
11789	5 G 10	19,3	592,0	855,0	8
11790	7 G 10	21,2	810,0	1308,0	8
11793	4 G 16	20,4	740,0	882,0	6
11794	5 G 16	22,4	895,0	1293,0	6
11812	7 G 16	24,8	1282,0	2149,0	6
11795	3 G 25	22,3	1070,0	1432,0	4
11796	4 G 25	24,9	1140,0	1911,0	4
11797	5 G 25	27,8	1380,0	2414,0	4
11798	3 G 35	26,2	1240,0	1914,0	2
11799	4 G 35	29,1	1576,0	2542,0	2
11800	5 G 35	32,1	1930,0	3180,0	2
11801	3 G 50	30,5	1675,0	3080,0	1
11802	4 G 50	34,5	2155,0	3550,0	1
11803	5 G 50	38,3	2794,0	4753,0	1
11804	3 G 70	36,0	2288,0	3840,0	2/0
11805	4 G 70	40,1	3120,0	4939,0	2/0
11806	5 G 70	44,3	3705,0	6572,0	2/0
11807	3 G 95	40,9	3010,0	5651,0	3/0
11808	4 G 95	45,6	4043,0	6690,0	3/0
11809	5 G 95	50,3	5026,0	8370,0	3/0
11810	3 G 120	45,4	3812,0	6342,0	4/0
11811	4 G 120	50,0	5069,0	8453,0	4/0
11813	4 G 185	62,5	8040,0	10800,0	350 kcmil

Dimensions and specifications may be changed without prior notice. (RA03)