


HELUTOP® sealing inserts

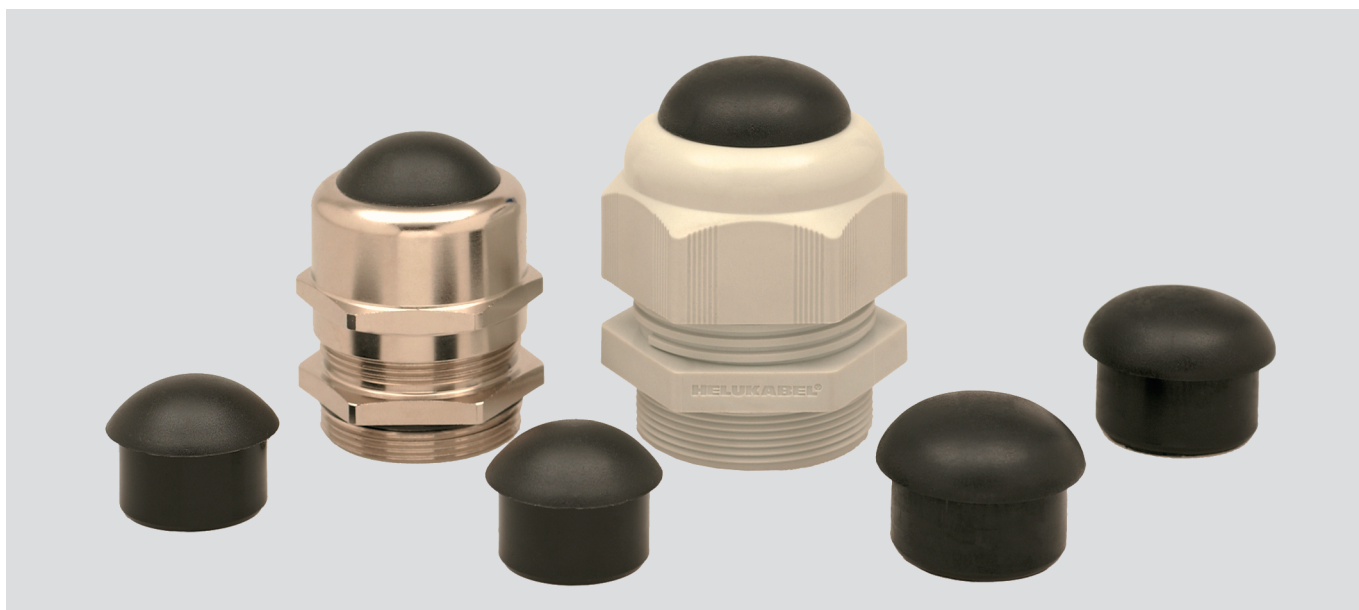

HELUTOP® sealing inserts

Protection tab for sealing of not assigned cable glands HELUTOP® HT.

Material

Polyamide 6


Colours: black

Application

- Plant and machine construction
- Robotics
- Automation technology
- Vehicle construction and shipbuilding
- Railway technology
- Installation technology
- Control cabinet construction

Note

*Protection tab 903492 only for cable glands type HT and HT-MS with clamping range 5-10mm.



Dimensions

D	Outer diameter head
d	Outer diameter insert
H	Height total
h	Height head

Part no.	Size metric/ PG	Clamping area from/up to mm	Outer Ø head mm	Outer Ø insert mm	Height total mm	Height head mm	Unit	Net EUR/100 items at a purchase of		
								up to 100	101 - 500	501 - 1000
905924	M16/ PG7	3,0 - 6,5	9,2	6,4	11,0	4,0	100	o. r.	o. r.	o. r.
905925	M16/ PG9	4,0 - 8,0	10,5	8,0	16,0	5,0	100	o. r.	o. r.	o. r.
903492*	M16/ PG11	5,0 - 10,0	13,3	9,7	20,7	5,7	100	o. r.	o. r.	o. r.
903493	M20/ PG13,5	6,0 - 12,0	15,8	12,0	18,0	8,0	100	o. r.	o. r.	o. r.
905928	M20/ PG16	10,0 - 14,0	18,0	13,6	18,7	8,7	100	o. r.	o. r.	o. r.
903494	M25	11,0 - 17,0	19,9	16,4	18,3	7,3	100	o. r.	o. r.	o. r.
905929	M25/ PG21	13,0 - 18,0	22,2	17,8	21,0	9,7	100	o. r.	o. r.	o. r.
903495	M32	15,0 - 21,0	24,1	20,4	21,2	9,2	100	o. r.	o. r.	o. r.
903496	M40	19,0 - 28,0	32,0	27,5	25,0	9,0	100	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request