


# CLPK-PD

Click-in profiles | Stroomverdeling

nVent

HOFFMAN

CONNECT AND PROTECT

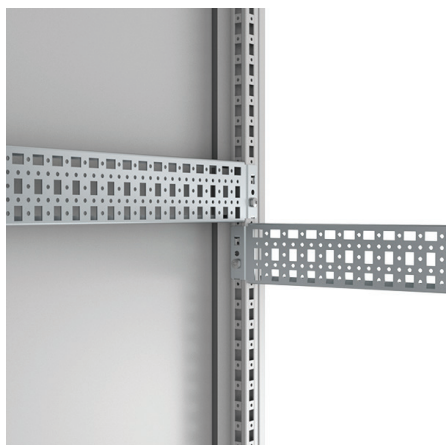

**Omschrijving:** Universal profile for both depth and width fitting on the 25 mm DIN hole pattern of the enclosure's frame or in combination with the CLPF and VB profiles. The 75 mm wide profile is equipped with three rows of holes of which one is turned 90°. This makes it possible to mount the CLPF profiles in both directions. The CLPK can be secured by the use of self tapping screws.

**Materiaal:** 1.5 mm zinc plated steel.

**Verpakkingseenheid:** 4 profiles.

Voor behuizing		
B/D	Max. belasting	Item nr.
400	2000 N	CLPK400
600	1600 N	CLPK600
800	1600 N	CLPK800
1000	1200 N	CLPK1000