



**INTER
NOVA**

PROFESSIONAL LIGHTING

IT ALL
STARTS
WITH LIGHT

since 1996

Dutch
CRAFTSMANSHIP

Lighting Solutions 2023



internova.nl



internova_lighting



internova_lighting

OUR BRAND

At Internova, we plan and design professional LED lighting. Our main focus is in the retail and hospitality industry. As producers of light, we are proud of our broad selection of lighting products. We advise a lighting strategy based on LED modules, lumens, lighting colour and focal points. All our fixtures are made in The Netherlands. During the past 27 years, we have been part of many big hospitality and retail projects. Projects in collaboration with wholesalers and lighting specialists.

Our functional lighting is not only easy on the eye, but is designed with a purpose. Lighting not only has to contribute to the atmosphere, but it is also a part of the branding, routing and conversions. It takes more than just a set of lights and track to make it work. Lighting is a specialization, which makes it a real profession. And therefore; Internova

PROFESSIONAL LIGHTING



*Dutch
Craftmanship*

IT ALL STARTS WITH LIGHT

Three different quotations were received for a stunning bar. An interior designer stuck to a drawing table, finally realized the perfect colour to put on the walls. Endless discussions were held about the right chairs. The interior of a store, restaurant or hotel has to be on point. The design of the establishment determines atmosphere and appearance. It is part of your brand. But what to do with the lighting? How do you incorporate this into your design, to contribute to perception and atmosphere? Have you ever really thought about this?

NO LIGHT WITHOUT A PLAN





13. Liberta



15. Diabolo



16. Diabolo L



17. Veloce




19. Meteora - S



19. Meteora



45. Powergear



47. Powergear 48V



48. Lentiggini 48V



49. Sottile 48V



50. Banda 48V



51. Lucevaria System



21. Meteora-S
Surface & Recessed



22. Meteora Surface



23. Meteora XL



25. I.Forza



26. Colibri



27. Variare



55. Dolina



56. Profonda



57. Giro DLM



58. Giro SLM



58. Tondo



59. Cerchio



27. Cambia



29. Figlio



30. Interno



30. Lungo



31. Baleno



35. Galleria



59. Cerchio L



60. Visione 360



61. Girevole



62. Occhio



63. Curva



64. Doblar



35. Presenta



37. Concentra



38. Vela



39. Tubulo



39. Guarda



40. Barista



65. Rondio



65. Quadro



66. Etna



67. Taleggio



67. Vittorio



69. Moon Retail



41. Il Podio



42. Fuga



42. Labarra



43. Luminosa



43. Linea 60/100



44. Lucevaria



71. Moon frame(less)



73. Luna frame(less)



75. Star frame(less)



79. Sottile 40 Due



80. Favo



80. Nuvola



81. Star Surface



82. Cubo up/down



83. Snello



84. Orizzonte



84. Lipari



87. Salina



88. Meteara pendant



89. Lucevaria Pendant



91. Alta



92. Riva



92. Roswell



Utility That's where you want to work!

The right lighting in a utility environment contributes to the well-being of the employees and creates a pleasant working environment. Our lighting planners can build beautiful 3D lighting concepts according to the latest NEN standard, for the perfect office environment.



Supermarket The volume can be increased!

A common mistake is the use of flat line lighting in a supermarket, which means that there is no atmosphere and a bad appearance. By creating the perfect balance between general lighting and spot lighting, our lighting designers can provide the right atmosphere. Also consider applying special lighting for fresh food and cosmetics! This makes a visit to these stores a pleasant experience which contributes to the increase of sales volumes.



Showroom Don't be that simple!

Light creates atmosphere, branding, conversion and routing. Good showroom lighting does not consist of a simple combination of spots and tracks. For the right lighting, a well-thought-out lighting plan is essential. Internova designs and realizes customized (3D) lighting plans.



Restaurant & Bar Make things happen!

In restaurants and bars, good lighting is not only important to create the perfect atmosphere, but must also be functional. By using the right combination of functional and decorative lighting a space can be brought to life.



Shops Seductively illuminated!

If the layout of a shop changes, the lighting should always be easy to adjust. That is why Internova tracklights in combination with our flexible Powergear track system are perfect to use in any shop. Understand the art of seduction by creating a great product presentation using Internova's FASHION spot!



Fresh Food That tastes like more, doesn't it?!

Where other LED food modules can cause food to perish (e.g. aging of fresh meat and fish) within a few hours, the Premium Food LED modules by Internova are suitable for lighting fresh food products without any issues. This is achieved by selecting the correct wavelength combinations within the LED chips, the fresh food is displayed in the best possible way: true-to-life colours and a tasteful look.



Residential I have it at home myself!

Lighting is becoming increasingly important in residential projects and is becoming indispensable. The right lighting can determine the atmosphere of a home. With new additions to our program such as the compact 48V track system and the extensive Meteara serie we can provide the right solution for these projects.

LIGHTING DEFINITIONS

In our product descriptions you will find a number of typical lighting definitions and symbols. We have summarized some of the most commonly used product features in accessible descriptions.

LUMEN - *Output of luminous flux*

The amount of light output generated by a lightsource. The higher the lumen output, the higher the amount of light.

CRI Ra - *Colour rendering index*

Indicates on a scale 0-100 how natural a light source can render true colours of illuminated objects and spaces. Natural daylight has a CRI of 100Ra.

CCT - *Colerated Colour Temperature*

CCT is measured in degrees Kelvin (K) and indicates the colour appearance of the light source. Artificial light is mostly rated between 2200K and 5700K. The higher the temperature, the cooler the light.

UGR - *Unified Glare Rating*

The UGR is the index that quantifies the discomfort glare. UGR is rated between 10 and 28 whereby 10 is very comfortable. Office lighting should always be lower than 19 (UGR <19)

LED MODULES

Standard



Basic lighting module available in CRI >80Ra and >90Ra in 2700K, 3000K, 4000K, and 5700K.

Premium



Excellent quality of light and colour rendition, combined with high energy efficiency. Ideal for creating ambience, fresh whites and depth of colour in many retail environments. Premium White module available in CRI >80Ra and >90Ra in 3000K, 3500K and 4000K.

Food



LED modules dedicated towards fresh food applications.

Food WarmWhite Module: Enhances the appearance of fresh food, such as bread, fruit and vegetables. Food Premium Meat Module: Enhances the appearance of fresh meat. Fresh Fish Module: Enhances the appearance of fresh fish.

DTW



Dim-to-Warm is a technology that reduces a luminaire's colour temperature when being (phase) dimmed, from 3000K to 2200K. This makes our Dim-to-Warm fixtures ideal to use in domestic and hospitality projects and gives the feeling of cosy halogen lamps.

TW



Tunable White allows you to control the colour temperature of a fixture between 2500K and 7000K. Our Tunable White fixtures can be controlled using the user friendly Casambi app or via DALI.

CRI98



Full Spectrum CRI >98Ra. The high fidelity spectral output of our Full Spectrum modules creates stunning environments with the best possible natural and vivid colour rendering. Available in 3000K and 4000K.

HE+



The new High Efficiency+ Fortimo SLM G7 LED Modules provide >15% more efficiency (Lm/W) in comparison to our standard CRI90 modules without compromising on reliability or quality of light.

OPTIES

Dimmable



Dimmable



Dimmable



Honeycomb



Glass



Casambi



Emergency unit



TRIAC - A switch that is used to control power by phase cutting. When used in lighting applications, it's commonly referred to as Triac dimming.

DALI - Protocol of controlling the luminaire whereby a data signal can control each driver individually.

1-10V - the driver generates an analogue signal of 1V (minimum) to 10V maximum, which reaches the dimmer switch (potentiometer) which modulates it.



This is an interactive catalogue: the products can be found quickly and easily by scanning the **QR codes**. With every product you can find a QR code which can be scanned with the camera on your mobile phone. After following the link you will be redirected to the relevant product on our website.



TRACKLIGHTS

Our track lighting is extremely flexible and versatile. You can choose from a variety of different designs and lighting options. All of them equipped with the latest generation LED- and smart- technology. Combine these Made-in-Holland tracklights with our Powergear® 3-circuit track for the perfect flexible solution for any project and industry.



LIBERTA




Aluminium 3-phase tracklight equipped with Philips Fortimo LED module and Philips Xitanium LED driver. Due to its unique double hinged design the Libertà provides you with the maximum freedom in each project. You can use the tracklight both for direct and indirect (up)lighting.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

Colour




Beam angle



Led modules




Options



MAXIMUM FLEXIBILITY



LIBERTA

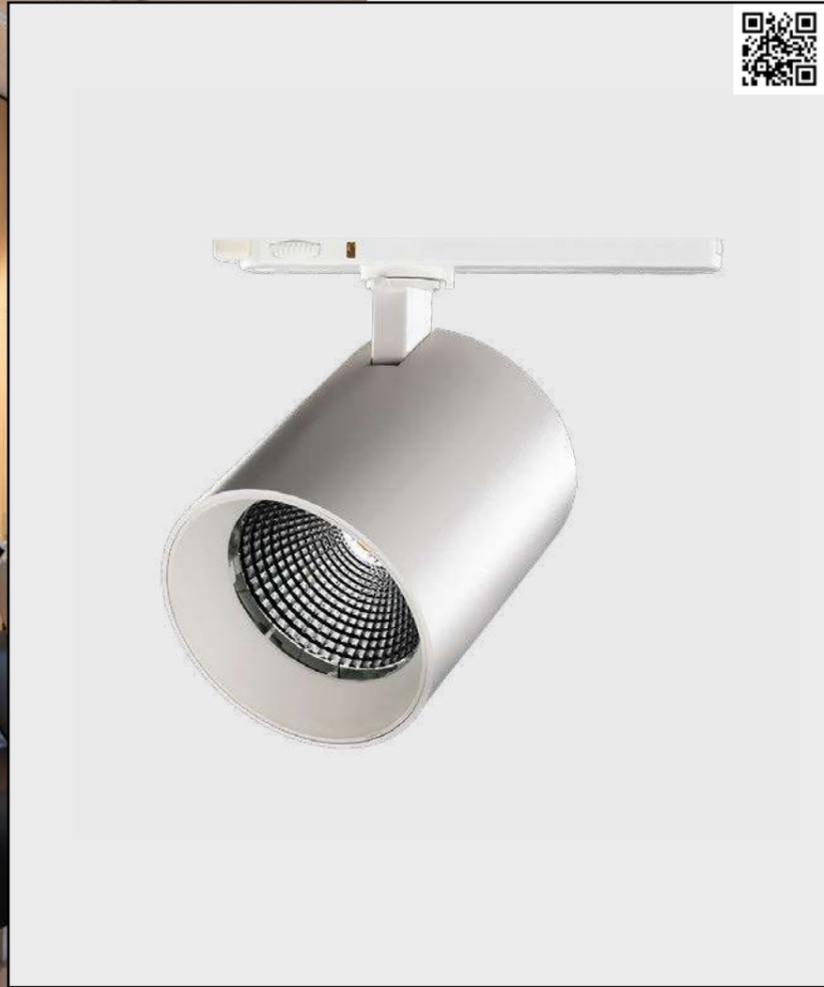

DIABLO


Aluminium 3-phase tracklight equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

Colour




Beam angle



Led modules



Options



DIABLO-L

Powerful aluminium 3-phase tracklight equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 5500lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

Colour




Beam angle



Led modules



Options



VELOOCE



Aluminium 3-phase tracklight. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

Colour





Beam angle



Led modules




Options

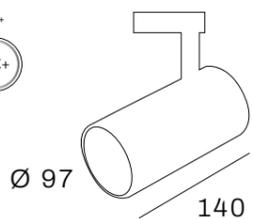

VELOOCE




METEORA-S

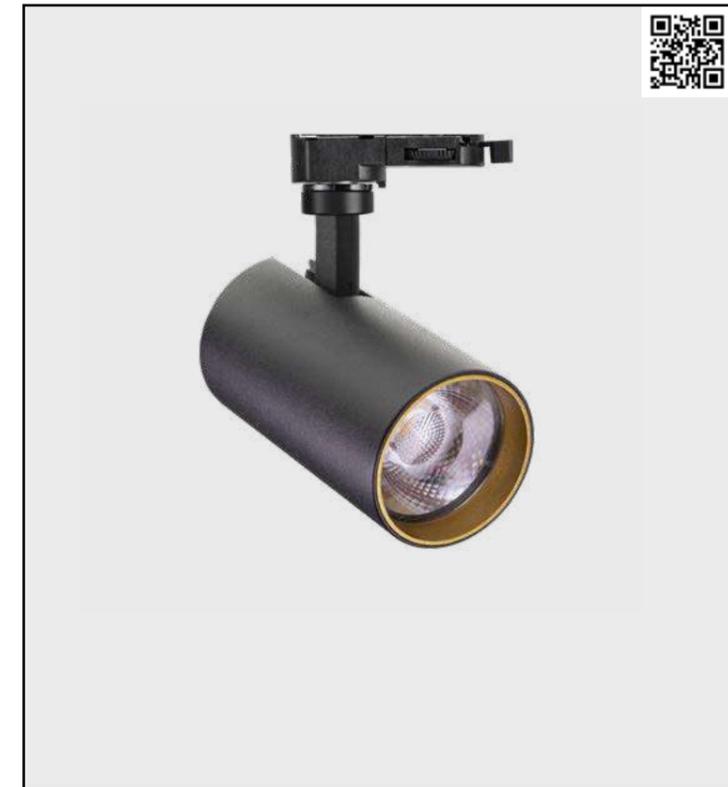

Compact aluminium 3-phase tracklight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

Lumen : 2700K 700lm, DTW 500lm
CRI : >90Ra
CCT : 2700K, DTW (3000K - 2000K)




METEORA



Compact aluminium 3-phase tracklight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality projects.

Lumen : 1100lm
CRI : >90Ra
CCT : 2700K, 3000K, DTW (3000K - 2000K)



METEORA PENDANT:
page 91

Standard


Dimmable




Colour



Beam angle



Led modules



Options



METEORA-S

METEORA



**Choose
your
inner
ring.**



METEORA - S

SEMI-RECESSED



Compact semi-recessed spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

Lumen : 2700K 700lm, DTW 500lm
CRI : >90Ra
CCT : 2700K, DTW (3000K - 2000K)

Cut-out size semi recessed:
 Ø70 x 45mm

METEORA - S

SURFACE



Compact aluminium spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

Lumen : 2700K 700lm, DTW 500lm
CRI : >90Ra
CCT : 2700K, DTW (3000K - 2000K)



Standard


Dimmable




Colour



Beam Angle



Led modules



METEORA

SURFACE



Standard


Dimmable




Colour



Beam angle



Led modules

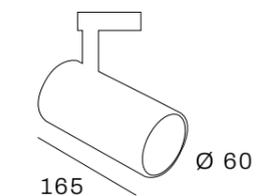

Compact aluminium surface mounted spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality projects.

Lumen : 1100lm
CRI : >90Ra
CCT : 2700K, 3000K



METEORA-XL




3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Available with a golden, black or white inner ring. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K


Colour




Beam angle



Led modules



Options



Choose your inner ring.

METEORA-XL



I.FORZA



Colour

Beam angle


Reflector

Led modules

Options

3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Suitable for high lumenflux up to 4500lm. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K



COLIBRI



Colour

Beam angle


Reflector

Led modules

Options

Compact aluminium 3-phase tracklight. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

Lumen : 1100lm, 2000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K



VARIARE



Aluminium 3-phase tracklight in powder coating finish with adjustable beamangle (8-30°). Equipped with unique Powergear Ultimate Adapter® with built-in LED driver. Ideal for museum and exposition lighting.

Lumen : 900lm
CRI : >90Ra
CCT : 2700K, 3000K

CAMBIA




Aluminium 3-phase tracklight in powder coating finish with adjustable beamangle (10-60°). Equipped with Powergear Ultimate Adapter® with built-in driver.

Lumen : 1100lm, 2000lm
CRI : >90Ra
CCT : 3000K

- Colour
 - White
 - Black
- Beam angle
 - Lens
 - 8-30°
- Led modules
 - Standard
 - DALI
- Options
 - Dimmable
 - Casambi
 - On-board dimming



Beautiful works of art deserve the right **attention.**

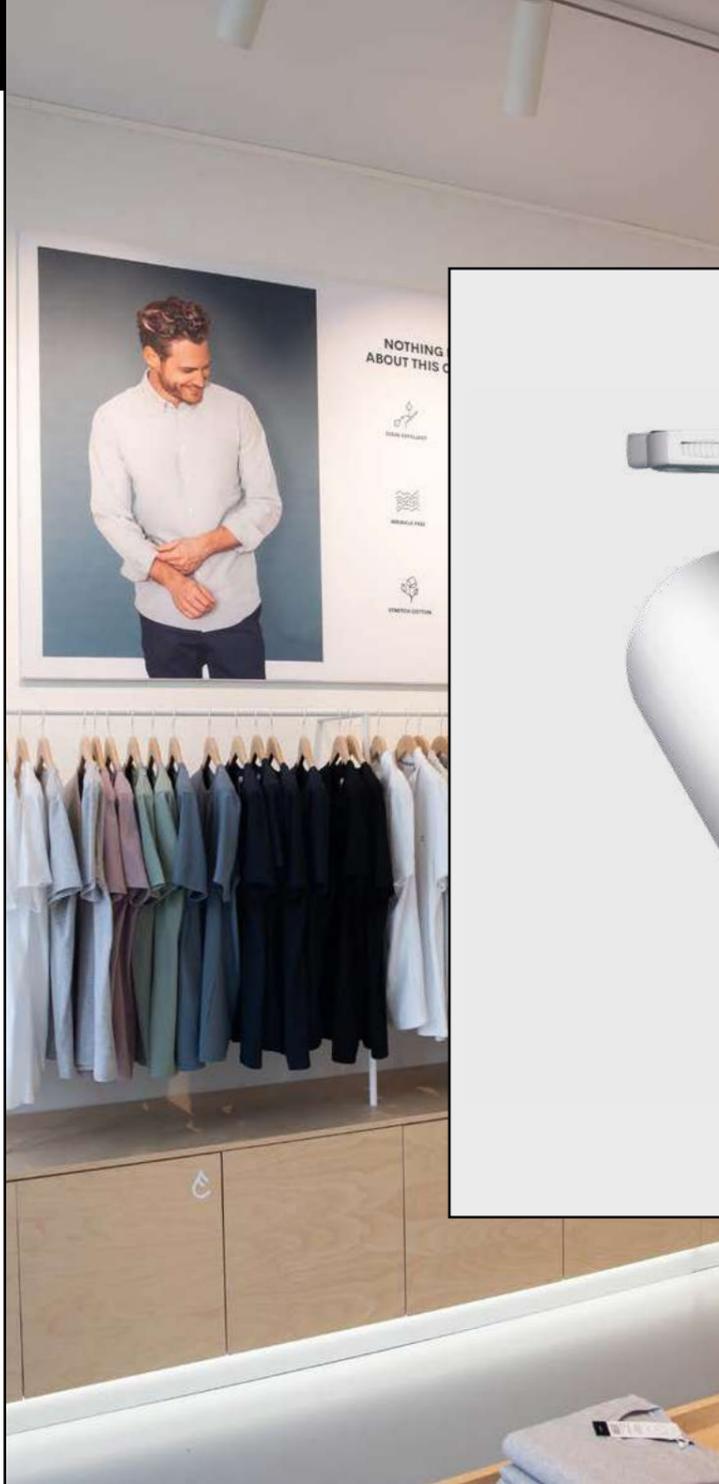


FIGLIO



- Colour**
- White
 - Black
- Beam angle**
- Reflector 15°
 - Reflector 24°
 - Reflector 40°
- Led modules**
- Standard
 - Premium
 - DTW
 - HE+
- Options**
- Dimmable TRIAC
 - Dimmable DALI
 - Casambi
 - Glass
 - Honeycomb

Compact 3-Phase tracklight with built-in driver. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 2500lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

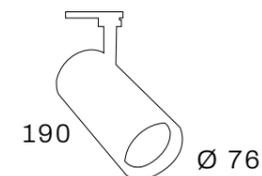


INTERNO LUNGO



Tubular 3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K




LUNGO



- Colour**
- White
 - Black
 - Dark Grey
- Beam angle**
- Reflector 15°
 - Reflector 24°
 - Reflector 40°
 - Reflector 60°
- Led modules**
- Standard
 - Premium
 - Food
 - DTW
 - CRI98
 - HE+
- Options**
- Dimmable TRIAC
 - Dimmable DALI
 - Dimmable 1-10V
 - Casambi

Tubular 3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K



BALENO



Aluminium 3-phase tracklight, available in a RGBWW and TW version, CRI>90. With this tracklight it is possible to create a Human Centric Lighting environment. The Baleno can be supplied as a DALI DT-8 or Casambi controllable version.

Lumen : 3000lm
CRI : >90Ra

Available in:
-RGBWW (RGBW + 2500-7000K)
-TW (2500-7000K)

Colour



Beam angle



Options



RGBWW: Colours can vary like a rainbow; from light green, deep blue to dark red. But also neutral white (CRI90) is available.

TW: Tunable White, with this function the light can vary from 2500K (extra warm white) to 7000K (daylight). Also known as Human Centric Lighting whereby the colour of the light simulates the day light cycle (Sunrise, Noon, Sunset).

Casambi

Casambi is a bluetooth low energy lighting solution. A large number of our fixtures can be equipped with the Casambi option. All Casambi products automatically form a wireless mesh network. It can be controlled by smartphones, tablets or smart watches. The Casambi App can be downloaded for free in the App store. With Casambi you can:

- Dim the lighting*
- Group luminaires and control them together
- Configure, save and recall scenes
- Adjust light colours*
- Adjust colour temperatures*
- Take pictures and add lighting control directly to your picture
- Defining timers for the purpose of Human Centric Lighting*


* Fixtures have to be equipped with this feature





Made in Holland

We are designers with technical knowledge and know better than anyone how light works. The difference is made by the perfect combination of the right luminaire, LED modules, lumen-output, light colours and focal points. We have all the craft and knowledge in house to convert concepts into unique custom-made lighting solutions. All Internova luminaires are assembled in the Netherlands. We keep the production process in our own hands, therefore we are extremely flexible and we guarantee quality and pure craftsmanship.

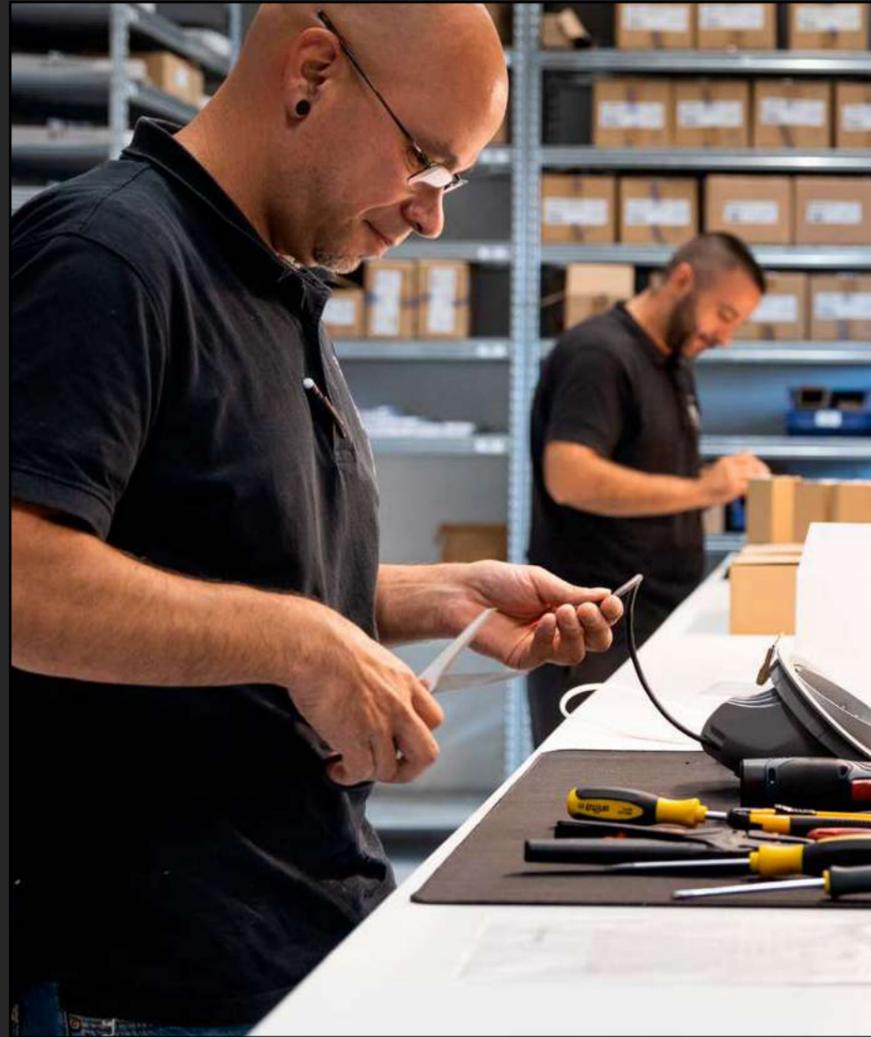


Producers of light.



No light without a plan


Light creates atmosphere, branding, conversion and routing. Good lighting does not consist of a simple combination of spots and tracks. For the right lighting, a well-thought-out lighting plan is essential. Internova designs customized (3D) lighting plans for our partners.

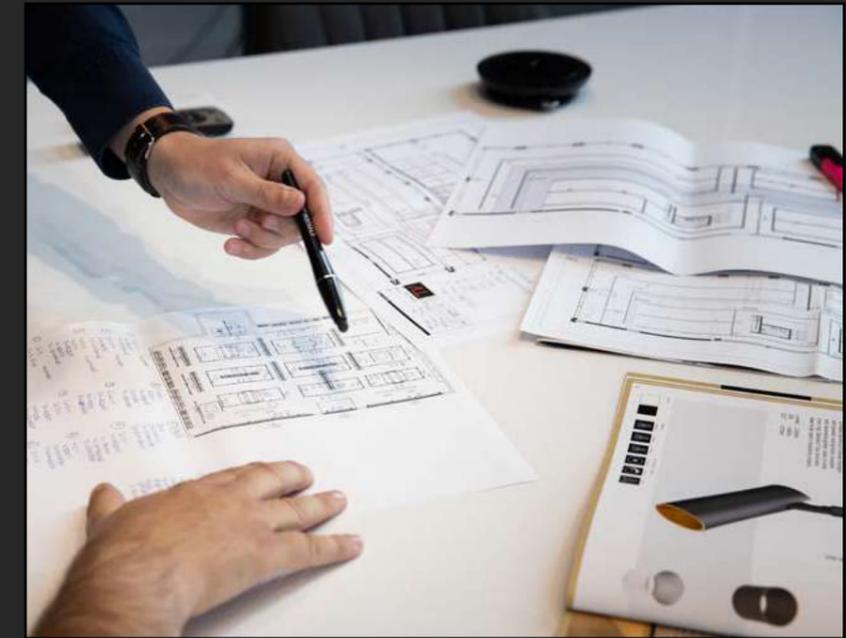

GALLERIA



- Colour
- -
- Beam angle
- Reflector
 - Reflector
 - Reflector
- 15° 24° 40°
- Led modules
- Standard
 - Premium
 - HE+
- Options
- Dimmable
 - Casambi
- DALI




Compact 3-phase aluminium tracklight with passive cooling body and driverbox. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

PRESENTA



- Colour
- -
 -
- Beam angle
- Reflector
 - Reflector
 - Reflector
 - Reflector
- 15° 24° 40° 60°
- Led modules
- Standard
 - Premium
 - Food
 - DTW
 - CRI 98
 - HE+
- Options
- Dimmable
 - Dimmable
 - Dimmable
 - Casambi
 - Glass
 - Honeycomb
- TRAC DALI 1-10V

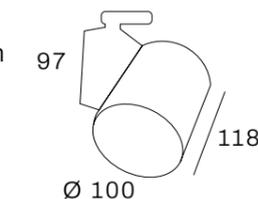

3-Phase aluminium tracklight with industrial look and separate driverbox. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K




CONCENTRA



- Colour
-
- Beam angle
- Reflector 15°
 - Reflector 24°
 - Reflector 40°
 - Reflector 60°
- Led modules
- Standard
 - Premium
 - Food
 - DTW
 - CRI 98
 - HE+
- Options
- Dimmable TRIAC
 - Dimmable DALI
 - Dimmable 1-10V
 - Casambi
 - Glass
 - Honeycomb

3-Phase aluminium tracklight with industrial look and separate driverbox. Powder coating finish. Suitable for high lumenflux, up to 6000lm. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K




VELA



- Colour
- -
 -
- Beam angle
- Reflector 70°
- Led modules
- Standard
 - Premium
 - Food
 - HE+
 - CRI 98
- Options
- Dimmable DALI
 - Casambi

3-Phase track Wallwasher with a very wide beamangle. Ideal for lighting wall presentations. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K




TUBULO



Simple and sleek 3-phase track spot with GU10 lampholder. Suitable for GU10 LED spot. Powder coating finish.

Supplied without lightsource.




GUARDA




Vintage theatre-look 3-phase tracklight with GU10 lampholder. Supplied including barn doors. Suitable for GU10 LED spot.

Supplied without lightsource.




BARISTA

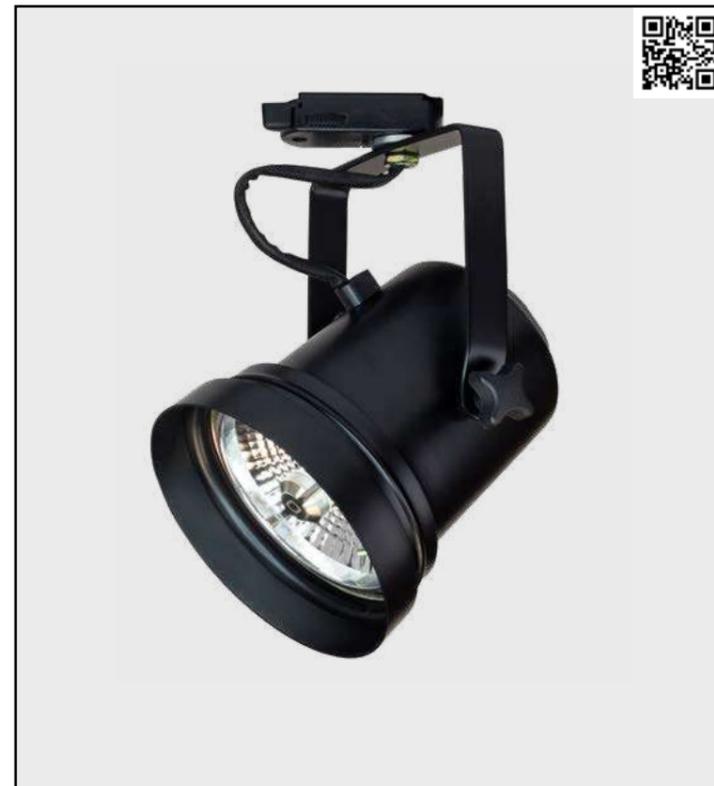

Vintage 3-phase tracklight with G53 lampholder. Suitable for AR111 LED spot. Supplied including 350mA Triac dimmable LED driver. The perfect spot for hospitality projects.

Lightsource advice: Optiled Array AR111 927/DTW 800lm (as shown on the product picture).

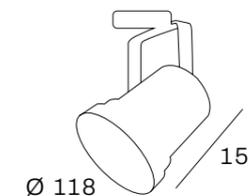

IL PODIO

- Colour**
-
- Beam angle**
- Reflector 15°
 - Reflector 24°
 - Reflector 40°
 - Reflector 60°
- Led modules**
- Standard
 - Premium
 - Food
 - CRI 98
 - HE+
 - DTW
- Options**
- Dimmable TRIAC
 - Dimmable DALI
 - Casambi
 - Glass
 - Honeycomb



Theatre-look 3-phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Supplied including barndoors. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

FUGA



- Colour**
- -
- Emergency Lighting**
- ⚡

Compact track mounted emergency light. Easy and quick to install due to the incorporated 3-circuit track adapter.

- **Non maintained**
- **Self-test**
- **Symmetrical lens**

Lumen : 200lm
CCT : 4000K
Autonomy : 1h emergency
Charge time : 24h

LABARRA



- Colour**
- -
- Beam angle**
- Lens 30°
 - Lens 60°
 - Lens 90°
- Led modules**
- Standard
- Options**
- Casambi

Aluminium linear 3-phase tracklight with high lumen output. Powder coating finish. Ideal to be used in high space and warehouses. Equipped with Osram LED modules and driver.

Lumen : 4500lm, 6000lm, 9000lm, 14000lm
CRI : >80Ra
CCT : 3000K, 4000K

LUMINOSA

TRACK / SURFACE



- Colour
 - White
 - Black
- Beam angle
 - Lens 30°
 - Lens 60°
 - Lens 90°
 - Lens 110°
- Led modules
 - Standard
- Options
 - Dimmable
 - Casambi

Linear light available in surface mounted and 3-phase track version. Can be equipped with a wide variety high efficiency lenses. The surface mounted version can easily be installed due to the use of magnets. Through-wiring available upon request. Equipped with Osram LED modules and driver.

1140mm : 4500lm, 6000lm
 1700mm : 6000lm, 9000lm
CRI : >80Ra, >90Ra
CCT : 3000K, 4000K, 5000K, 6500K

LINEA

60 / 100



- Colour
 - White
 - Black
- Beam angle
 - 120°
- Led modules
 - Standard


Linear LED fixture with a 3-phase track connection. Ideally suited for general lighting. Equipped with opal diffusor.

Lumen : (Linea 60) 2200lm / (Linea 100) 3200lm
CRI : >80Ra
CCT : 3000K / 4000K / 5700K Switchable



LUCEVARIA

TRACK

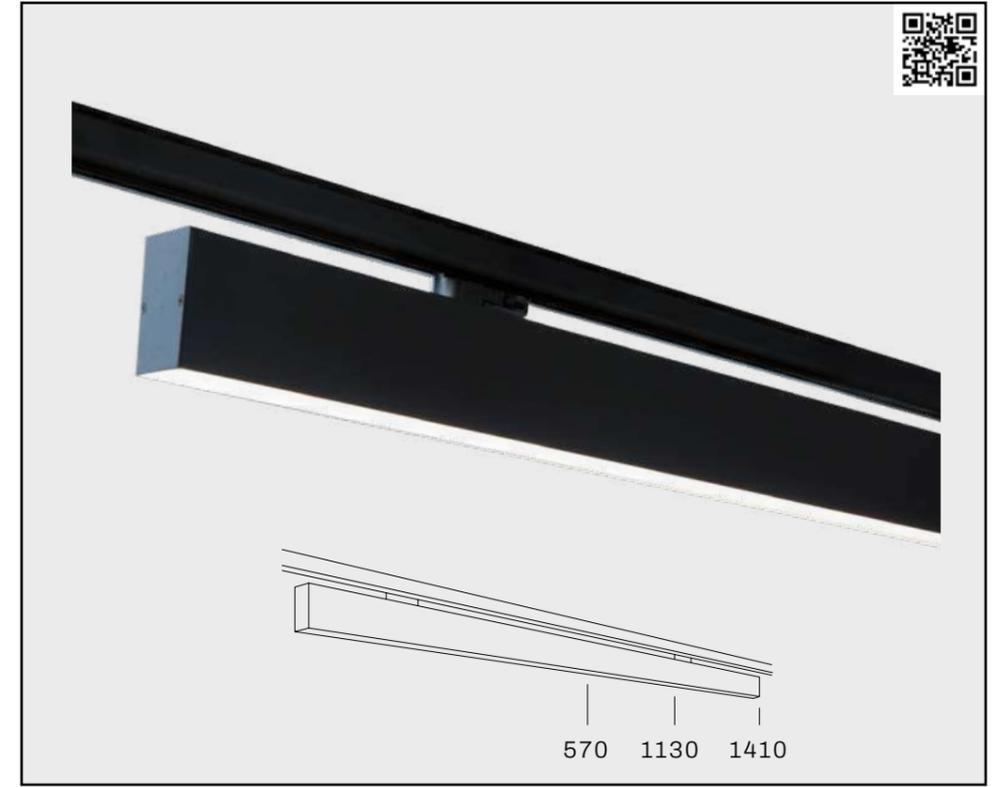

- Colour
 - White
 - Black
 - Grey
- Beam angle
 - 120°
- Led modules
 - Standard
- Options
 - Dimmable
 - Casambi
 - TW


Linear LED profile (45x78mm) for 3-phase track with a opal diffusor. Equipped with Osram LED modules and driver.

570mm : 1500lm
1130mm : 3000lm
1410mm : 3850lm
CRI : >80Ra, >90Ra
CCT : 3000K, 4000K, 5000K, 6500K



3-PHASE TRACK

1 meter PRO-0410
2 meter PRO-0420
3 meter PRO-0430



3-PHASE TRACK RECESSED

1 meter PRO-R410
2 meter PRO-R420
3 meter PRO-R430

Colour



Connector Left
PRO-0431L



Connector Right
PRO-0431R



Coupler
PRO-0433



Adjustable L-connector
PRO-M438



Adjustable T-connector
Right
PRO-M436R



Adjustable T-connector
Left
PRO-M436L



Middle Connector
PRO-0434



Adjustable connector
PRO-M435



X-connector
PRO-0437



Mounting clamp
PRO-04SK



Suspension kit with
5m wire
PRO-EZ0449



3-Phase track
adapter
PRO-0222



Fixed monopoint
3-phase
PRO-C100



Suspension
clamp
PRO-0418SK



T-bar EZCLICK
PRO-M146T



End cap
PRO-0432




Schuko adapter
PRO-4230V



3-PHASE DALI TRACK

1 meter PRO-0610
2 meter PRO-0620
3 meter PRO-0630



3-PHASE DALI RECESSED

1 meter PRO-R610
2 meter PRO-R620
3 meter PRO-R630

Colour



DALI Connector
Right
PRO-D631R



DALI Connector
Left
PRO-D631L



DALI Coupler
PRO-D633



DALI L-connector
Left
PRO-D635L




DALI L-connector
Right
PRO-D635R




DALI T-connector
Right
PRO-D636R1



DALI T-connector
Left
PRO-D636L1



DALI T-connector
Right
PRO-D636R2



DALI T-connector
Left
PRO-D636L2



DALI Middle
Connector
PRO-D634



DALI Flexible
Connector
PRO-D639



DALI X-connector
PRO-D637



DALI Track
adapter
PRO-D680

On the right track

Request our **Powergear brochure** for the full track program.

POWERGEAR®

48V Low voltage track system



The high quality Powergear 48V lighting track system for the professional lighting market is suitable for tracklights with Powergear 48V adapters. Specially designed for high-end (domestic) market due to its slim and subtle look. A comprehensive range of innovative accessories and a multitude of different adapters, give designers maximum freedom to create unique and smart 48V lighting designs. Powergear 48V lighting track comes in various surface mounted and recessed versions. The "EZCLICK" mounting features complete the system and make the track system quick and easy to install.

Low Voltage Single Circuit DALI



48V 15A Max.


Colour





Request our Powergear brochure for the full 48V program.




SURFACE MOUNTED TRACK



SURFACE MOUNTED DEEP TRACK

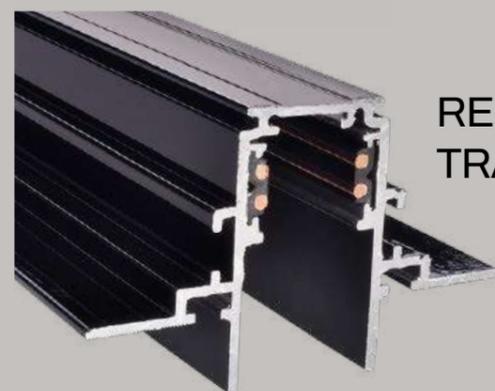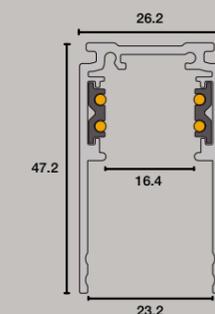

RECESSED TRACK

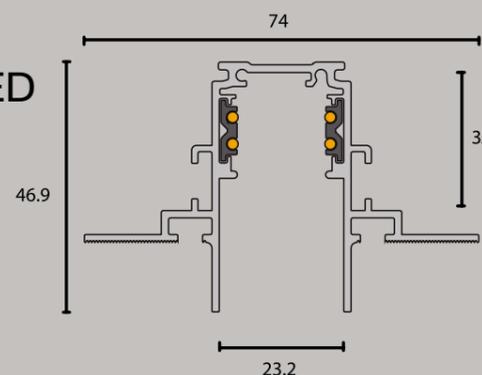

Tailormade solutions



SALINA 48V

Decorative pendant in powder coating finish. Available in black (golden inner ring) and white (black inner ring). Only compatible with the Powergear® 48V system. Ideal to be used in domestic and hospitality projects.

Lumen : 600lm
CRI : >90Ra
CCT : 2700K



Colour



Beam Angle

Lens



Options

Dimmable



LENTIGGINI

Linear lighting for Powergear 48V.
Low UGR due to dark-light reflector.

Lumen : 900lm
CRI : >90Ra
CCT : 2700K, 3000K

Colour




Beam angle

Reflector



Options

Dimmable

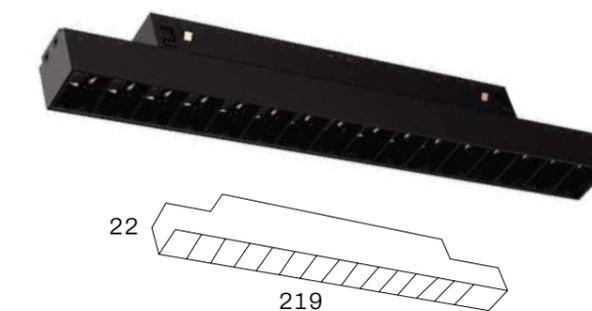

SOTTILE 25



Lumen : 210lm
CRI : >90Ra
CCT : 2700K, 3000K

SOTTILE 40



Lumen : 670lm
CRI : >90Ra
CCT : 2700K, 3000K

SOTTILE 50



Lumen : 910lm
CRI : >90Ra
CCT : 2700K, 3000K

Choose your inner ring.

Sottile serie:

Highly compact aluminium 48V tracklights. Only compatible with the Powergear® 48V system. Ideal to be used in high-end domestic and hospitality projects. Available with decorative golden, black or white inner ring. When using the Sottile spots in combination with deep- or recessed 48V track we advice to work with the Extension Rod.



Colour

Beam angle

Lens

Led modules

Options

- Standard
- Dimmable
- DALI

BANDA 25



Lumen : 300lm
CRI : >90Ra
CCT : 2700K, 3000K

BANDA 75



Lumen : 890lm
CRI : >90Ra
CCT : 2700K, 3000K


BANDA 50



Lumen : 600lm
CRI : >90Ra
CCT : 2700K, 3000K

Banda serie:

Linear light with opal diffusor for Powergear 48V track system. Ideal to be used for general lighting in combination with our Sottile spot light series.

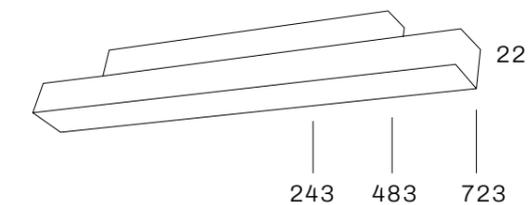

Colour

Led modules

Options

- Standard
- Dimmable
- DALI

LUCEVARIA SYSTEM

Design and multi-funtionality in one smart solution. To be used as pendant or surface mounted lighting. Linear lighting combined with spot lights for state of the art Lighting design. Powder coating finish. Equipped with OSRAM LED Module and driver.

Modular lighting system can be composed with following parts:

- Aluminium Profile (45x78mm) with a length of 1410mm, 1130mm or 570mm
- Various accessories available, see next page
- Available with blind cover, opal diffuser and blind cover with spots.

Linear Lighting

| | | |
|--------|---|------------|
| 1410mm |  | 3850 lumen |
| 1130mm |  | 3000 lumen |
| 570mm |  | 1500 lumen |

Specific lumen output upon request.

CCT : 3000K, 4000K
CRI : >80Ra, >90Ra

Colour



Beam angle



Led modules

Standard



Options

Dimmable



Casambi



TW



Spot Lighting

| | | |
|--------|---|---------|
| 1410mm |  | 4x spot |
| 1130mm |  | 3x spot |
| 570mm |  | 2x spot |

Lumen : 1100lm, 2000lm
CCT : 2700K, 3000K, 4000K
CRI : >80Ra, >90Ra




No Lighting (blind cover)

| | |
|--------|---|
| 1410mm |  |
| 1130mm |  |
| 570mm |  |



LUCEVARIA MODULAR SYSTEM

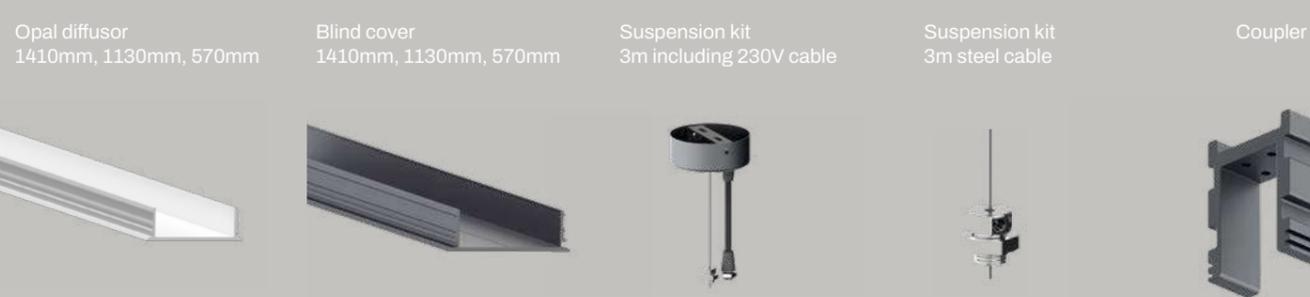

Opal diffuser
1410mm, 1130mm, 570mm

Blind cover
1410mm, 1130mm, 570mm

Suspension kit
3m including 230V cable

Suspension kit
3m steel cable

Coupler

End cap



Corner 90°




T junction





RECESSED

Recessed LED luminaires to be used in false- or T-bar-ceilings. Made-in-Holland and equipped with the latest LED and smart dimming technology. Highly suitable for retail, hospitality, residential and utility projects.

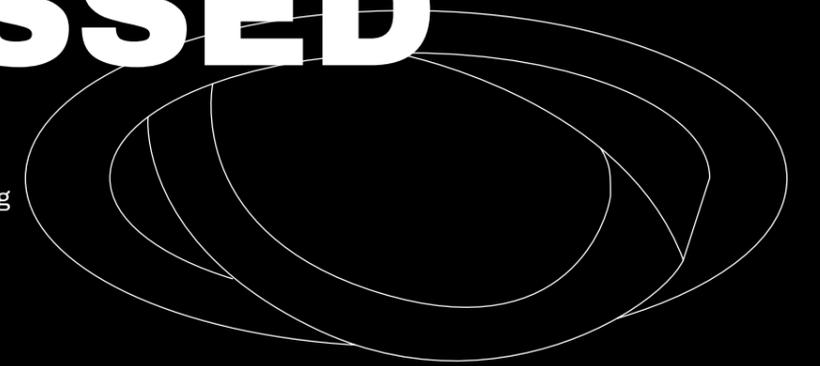


DOLINA

FRAMELESS



Tiltable recessed frameless fixture with deep reflector. 350° turnable and 30° tiltable. Standard Triac dimmable. Also available with gold, white or black inner and outer ring. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 800lm, 1400lm
CRI : >80Ra, 90Ra
CCT : 2700K, 3000K, 4000K
Cut-out size : Ø100 x H97mm




DOLINA



Tiltable recessed fixture with deep reflector. 350° turnable and 30° tiltable. Standard Triac dimmable. Also available with gold, white or black inner and outer ring. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 800lm, 1400lm
CRI : >80Ra, 90Ra
CCT : 2700K, 3000K, 4000K
Cut-out size : Ø90 x H97mm



Standard

Dimmable



Colour



Beam angle




Led modules

Standard




Options



Choose your inner ring.

PROFONDA

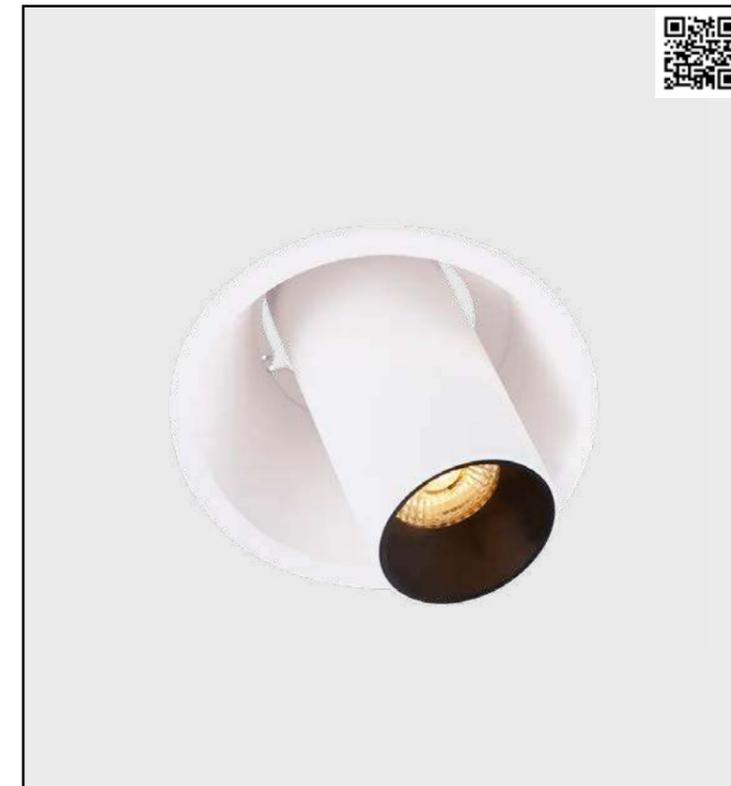

Tiltable recessed spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

Lumen : 2700K 700lm, DTW 500lm
CRI : >90Ra
CCT : 2700K, DTW (3000K - 2000K)
Cut-out size : Ø83 x H85mm

Standard


Dimmable



Colour



Beam angle



Led modules

Standard



Options



Ø 90



Ø 40



GIRO DLM

180 / 206 / 226



Ø 180
Ø 206
Ø 226

- Colour
 - White
 - Black
- Beam angle
 - Reflector
 -
- Led modules
 - Standard
 -
- Options
 - Dimmable
 -
 - Dimmable
 -
 - Dimmable
 -
 - Casambi
 -
 - Emergency unit
 -
 - Glass
 -

Economic LED downlight equipped with a Philips Downlight Module. Available in 3 sizes: 180mm, 206mm and 226mm. IP44 set with frontglass available upon request. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm
CRI : >80Ra
CCT : 3000K, 4000K
Cut-out sizes : Giro 180 Ø170 x H130mm
 Giro 206 Ø190 x H132mm
 Giro 226 Ø215 x H137mm



GIRO SLM

180 / 206 / 226



Ø 180
Ø 206
Ø 226

Highly efficient LED downlight equipped with a Philips SLM Module. Available in 3 sizes: 180mm, 206mm and 226mm. IP44 set with frontglass available upon request. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out sizes : Giro 180 Ø170 x H130mm
 Giro 206 Ø190 x H132mm
 Giro 226 Ø215 x H137mm

TONDO




Ø 206

- Colour
 - White
 - Black
- Beam angle
 - Reflector
 -
- Led modules
 - Standard
 - Premium
 - Food
 - CRI 98
 - HE+
 - DTW
 - TW
- Options
 - Dimmable
 -
 - Dimmable
 -
 - Dimmable
 -
 - Casambi
 -
 - Emergency unit
 -
 - Glass
 -

LED downlight with smooth reflector. Low glare. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver. IP44 set with frontglass available upon request.


Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø193 x H161mm
UGR : <16

CERCHIO

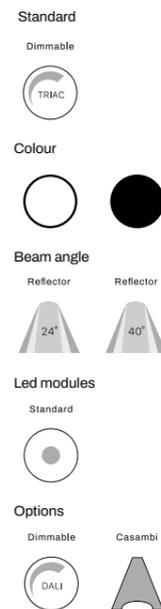


Fixed round recessed fixture with extra deep reflector and low glare. Standard Triac dimmable. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver. IP44 set available upon request.

Lumen : 800lm, 1400lm
CRI : >80Ra, 90Ra
CCT : 2700K, 3000K, 4000K
Cut-out size : Ø76 x H118mm
UGR : <15




CERCHIO-L


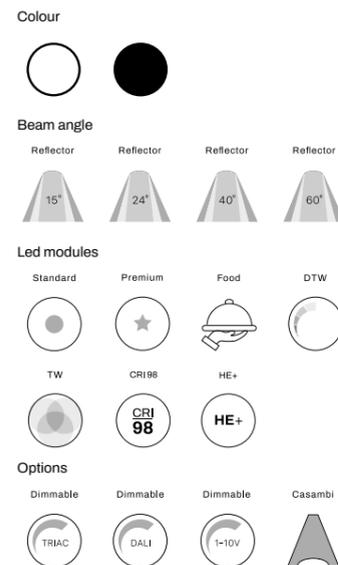


Compact LED Downlight with a deep reflector. Low glare (UGR <13). Glass standard included (IP44). Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 4000K, 5700K
Cut-out size : Ø155 x H160mm
UGR : <12

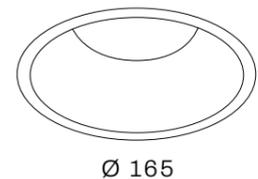


VISIONE³⁶⁰

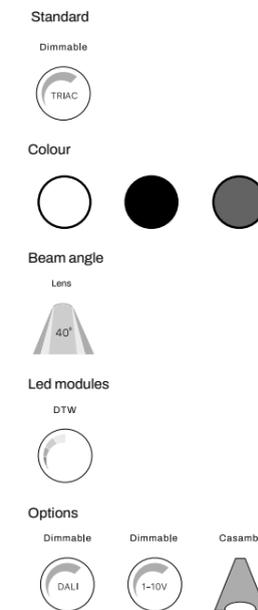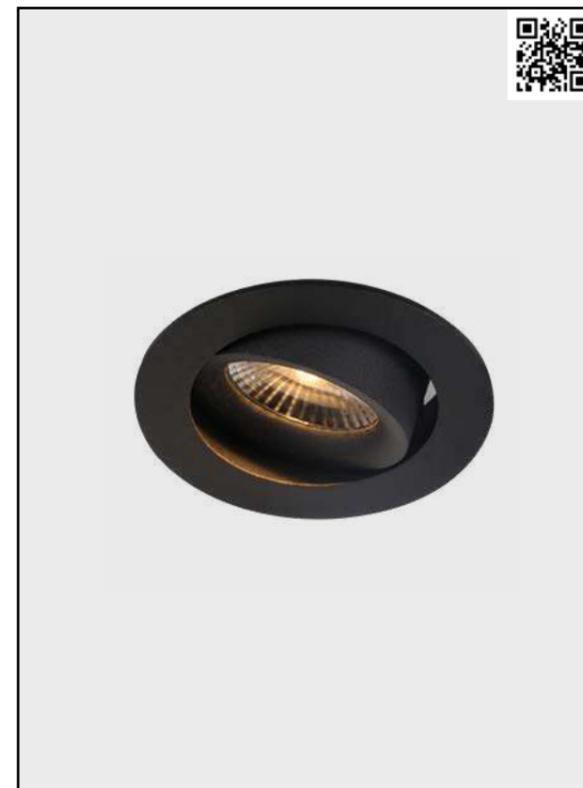

Compact gimbal recessed fixture. Equipped with a unique 360° turnable system and 30° tiltable. Standard equipped with Dim-to-Warm LED Module and Triac dimmable driver.

Lumen : 520lm
CRI : >90Ra
CCT : DTW (3000K - 1800K)
Cut-out size : Ø76 x H50mm




GIREVOLE

Colour




Beam angle



Led modules



Options

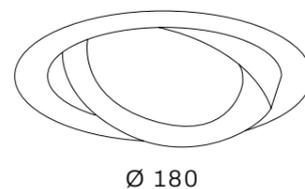

Ø 180

Gimbal recessed LED spot. Ideal for retail shops. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø170 x H110mm

OCCHIO

Colour




Beam angle



Led modules



Options

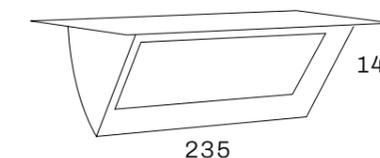


235

145

Recessed LED wallwasher with a very wide beam angle. Ideal for lighting wall presentations. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : L220 x W122 x H90mm

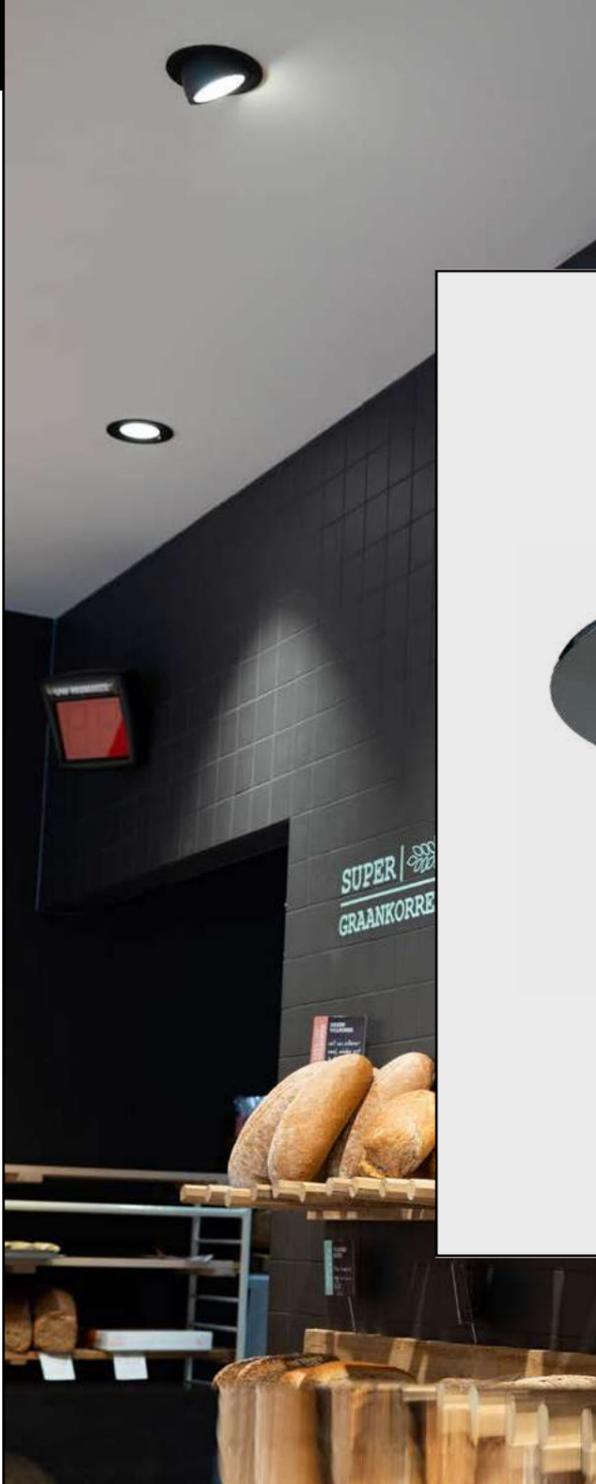

CURVA

Curved recessed LED spot. Turnable and tiltable. Ideal for retailshops. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø162 x H141mm

Colour



Beam angle




Led modules



Options



Ø 172



DOBLAR

Compact curved recessed LED spot. Turnable and tiltable. Ideal for retail shops. Glass standard included. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.


Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø130 x H114mm



Colour



Beam angle




Led modules




Options



Ø 140




RONDIO

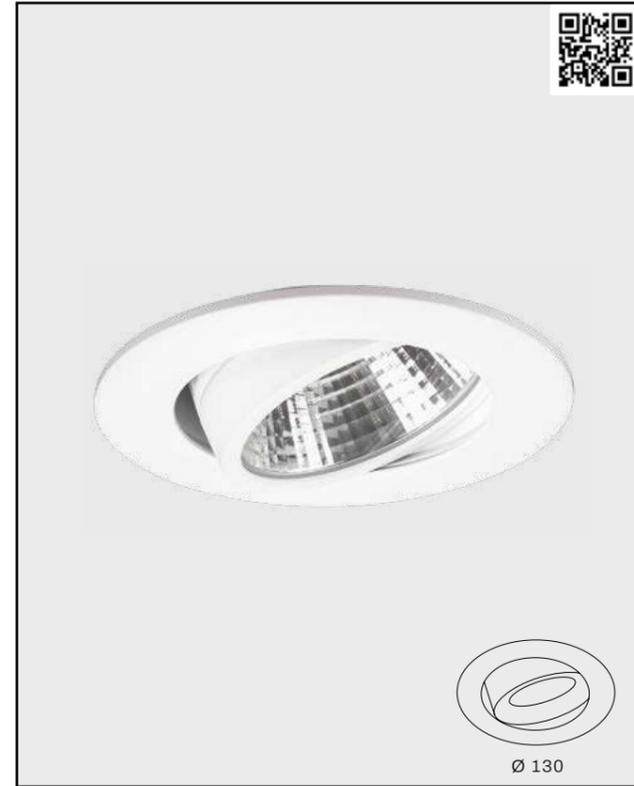

Round turn- and tiltable recessed LED spot. Glass standard included. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø115 x H94mm

QUADRO

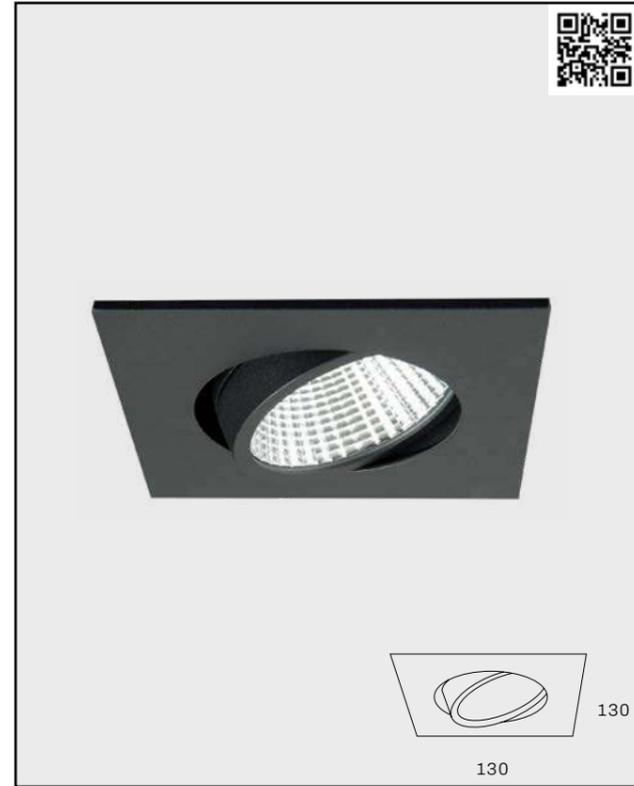

Square turn- and tiltable recessed LED spot. Glass standard included. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø115 x H94mm

Colour

Beam angle

Reflector

Led modules

Options

ETNA



Compact LED Downlight with a deep reflector. Powder coating finish. Glass standard included

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : Ø105 x H113mm


Colour

Beam angle


Reflector

Led modules

Options

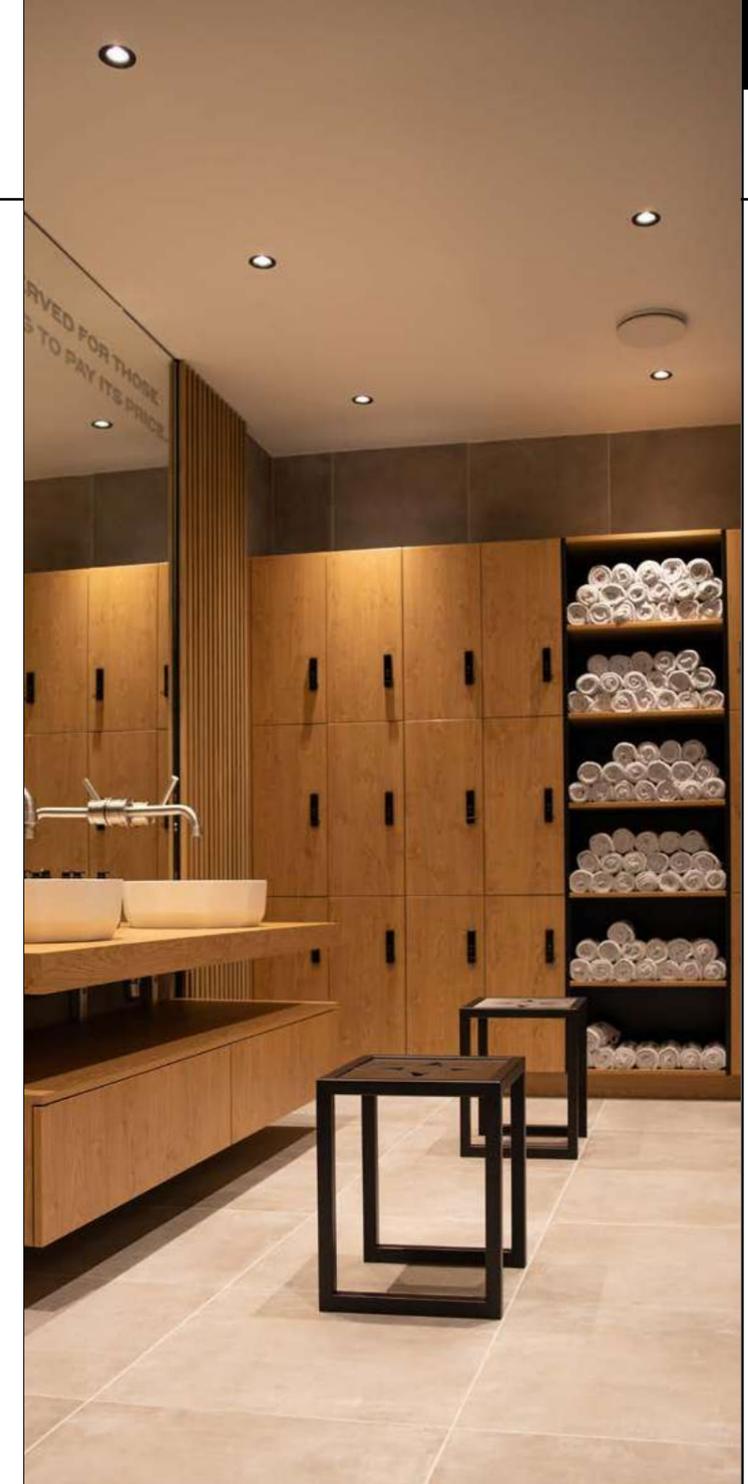


TALEGGIO

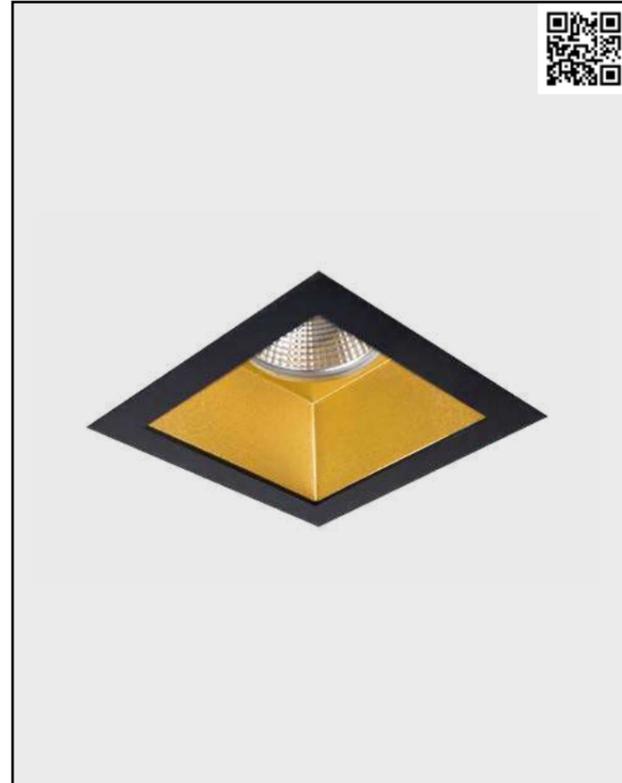

- Standard
- Dimmable
- Colour
- Beam angle
- Reflector
- Led modules
- Options

Square recessed LED spot with a deep reflector (low glare). Available with a black or gold inside. Standard Triac dimmable.

Lumen : 800lm, 1400lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 4000K
UGR : <13
Cut-out size : L98 x B98 x H124mm

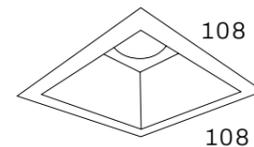


VITTORIO



- Colour
- Beam angle
- Reflector
- Led modules
- Options

Economic square LED downlight equipped with a Philips Downlight Module.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra
CCT : 3000K, 4000K
Cut-out size : L190 x B190 x H134mm

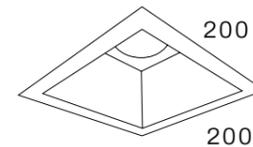



MOON 1-2 RETAIL


MOON 1 RETAIL

Single recessed gimbal LED spot.
Cut-out size: L165 x W165 x H145mm

MOON 2 RETAIL

Double recessed gimbal LED spot.
Cut-out size: L325 x W165 x H145mm


Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K

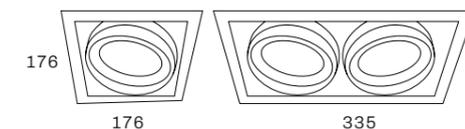

Colour



Beam angle



Led modules



Options





MOON 3 RETAIL

MOON 3 RETAIL

Triple recessed gimbal LED spot.
Powder coating finish.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K
Cut-out size : L470 x W165 x H145mm

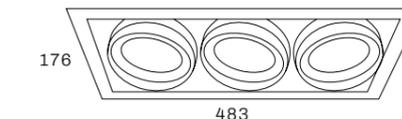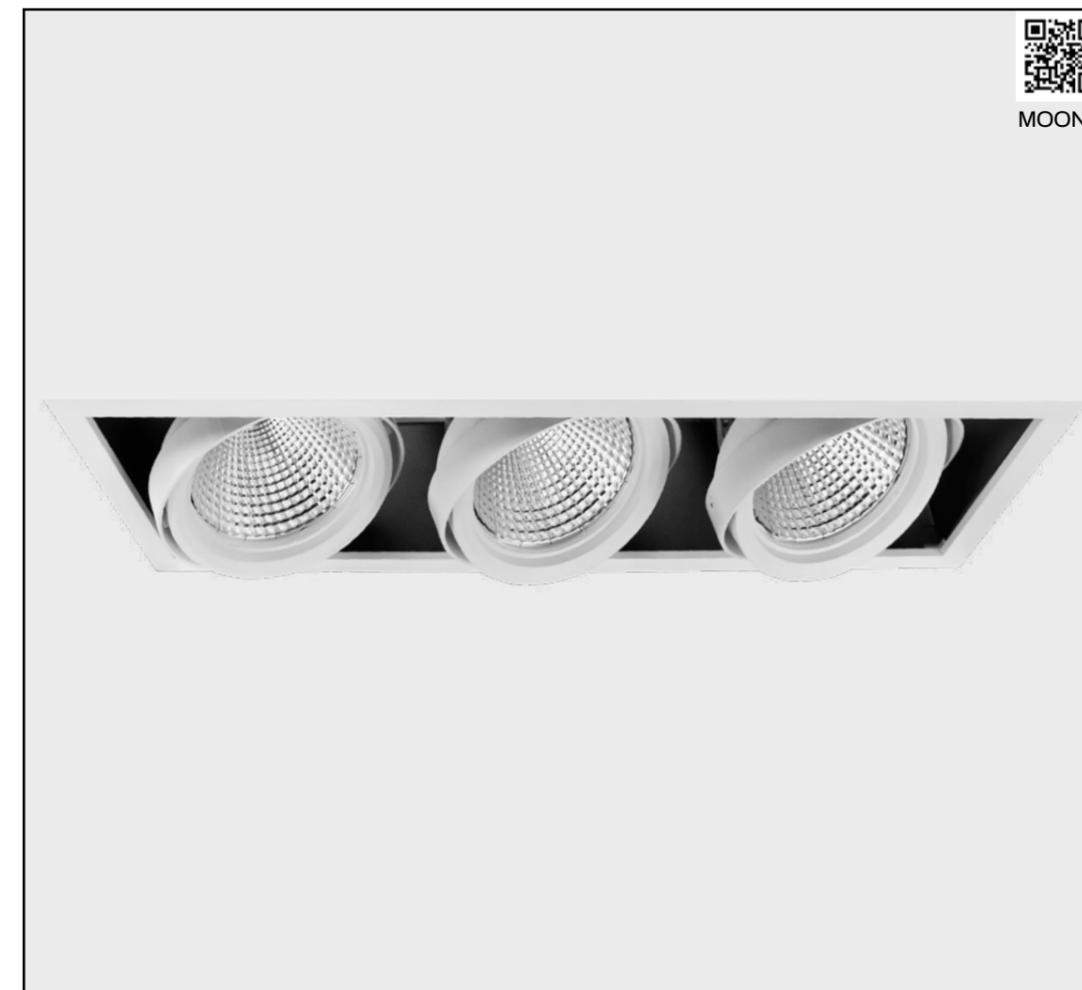

Colour



Beam angle



Led modules



Options





MOON FRAME

Colour



Gimbal recessed spot with modern look. Tilt- and swivel rings. Suitable for domestic and hospitality applications. For shop lighting we recommend the Moon Retail.


MOON 1 FRAME

Single recessed spot.
Cut-out size: L165 x W165 x H111mm

MOON 2 FRAME

Double recessed spot.
Cut-out size: L350 x W165 x H111mm

Lamptype AR111 LED.
Supplied without powersupply and lightsource, available upon request.

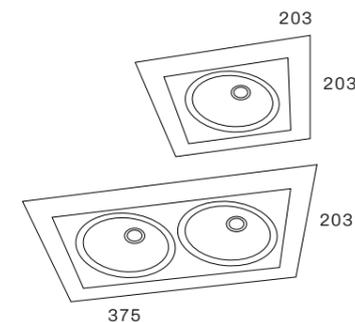

MOON FRAMELESS

Colour



Frameless gimbal recessed spot with modern look. Tilt- and swivel rings. Suitable for domestic and hospitality applications. Plasterframe included. For shop lighting we recommend the Moon Retail.


MOON 1 FRAMELESS

Single recessed spot.
Cut-out size: L165 x W165 x H110mm

MOON 2 FRAMELESS

Double recessed spot.
Cut-out size: L315 x W165 x H110mm

Lamptype AR111 LED.
Supplied without powersupply and lightsource, available upon request.

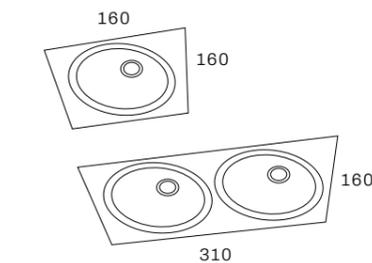

LUNA FRAME



Gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.

LUNA 1

Single recessed spot.
Cut-out size: L120 x W120 x H125mm



LUNA 2

Double recessed spot.
Cut-out size: L240 x W120 x H125mm
Lamp type AR70 LED.
Supplied without powersupply and lightsource, available upon request.

Colour



132

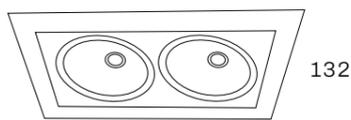

LUNA FRAMELESS



Frameless gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications. Plasterframe included.

LUNA 1 FRAMELESS

Single recessed spot. Cut-out size: L120 x W120 x H120mm



LUNA 2 FRAMELESS

Double recessed spot.
Cut-out size: L225 x W120 x H120mm
Lamp type AR70 LED.
Supplied without powersupply and lightsource, available upon request.

Colour



115

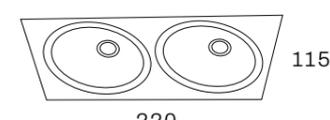

STAR FRAME



STAR 1



STAR 2



Colour



Gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.



STAR 1

Single recessed spot.
Cut-out size: L115 x W115 x H125mm

STAR 2

Double recessed spot.
Cut-out size: L210 x W115 x H125mm

Lamptype GU10 LED or 50mm LED module.
Standard supplied without lightsource, available upon request.

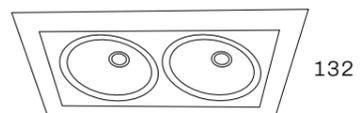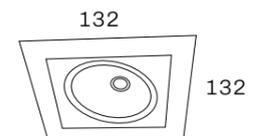

237

STAR FRAMELESS



STAR 1



STAR 2



Colour



Frameless gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications. Plasterframe included.



STAR 1 FRAMELESS

Single recessed spot.
Cut-out size: L115 x W115 x H120mm

STAR 2 FRAMELESS

Double recessed spot.
Cut-out size: L215 x W115 x H120mm

Lamptype GU10 LED or 50mm LED module.
Standard supplied without lightsource, available upon request.



210



SURFACE MOUNTED

Surface mounted LED luminaires available in different designs and for different purposes, from decorative to high output solutions. Suitable for both domestic and professional projects. Made-in-Holland and equipped with the latest LED modules and drivers.



SOTTILE 40^{DUE}



- Standard
- Dimmable
- Colour
- Beam angle
- Lens
- Led modules



Choose your inner ring.


Double surface mounted compact spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

Lumen : 2700K 2x700lm, DTW 2x500lm
CRI : >90Ra
CCT : 2700K, DTW (3000K - 2000K)

FAVO



- Standard
- Dimmable
- Colour
- Beam angle
- Reflector




Surface mounted 30° tiltable cardanic spotlight with powder coating finish. Standard IP44, equipped with a Dim-to-Warm LED module and Triac dimmable driver.

Lumen : 900lm
CRI : >90Ra
CCT : DTW (3000K - 1800K)

NUVOLA



- Standard
- Dimmable
- Colour
- Beam angle
- Reflector



Surface mounted IP44 spotlight with powder coating finish. Standard equipped with Dim-to-Warm LED module and Triac dimmable driver.


Lumen : 900lm
CRI : >90Ra
CCT : DTW (3000K - 1800K)

STAR SURFACE





Gimbal surface mounted spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.

STAR 1 SURFACE
Single surface mounted gimbal spot.



STAR 2 SURFACE
Double surface mounted gimbal spot.

Lamp type GU10 LED.
Supplied without light source,
available upon request.

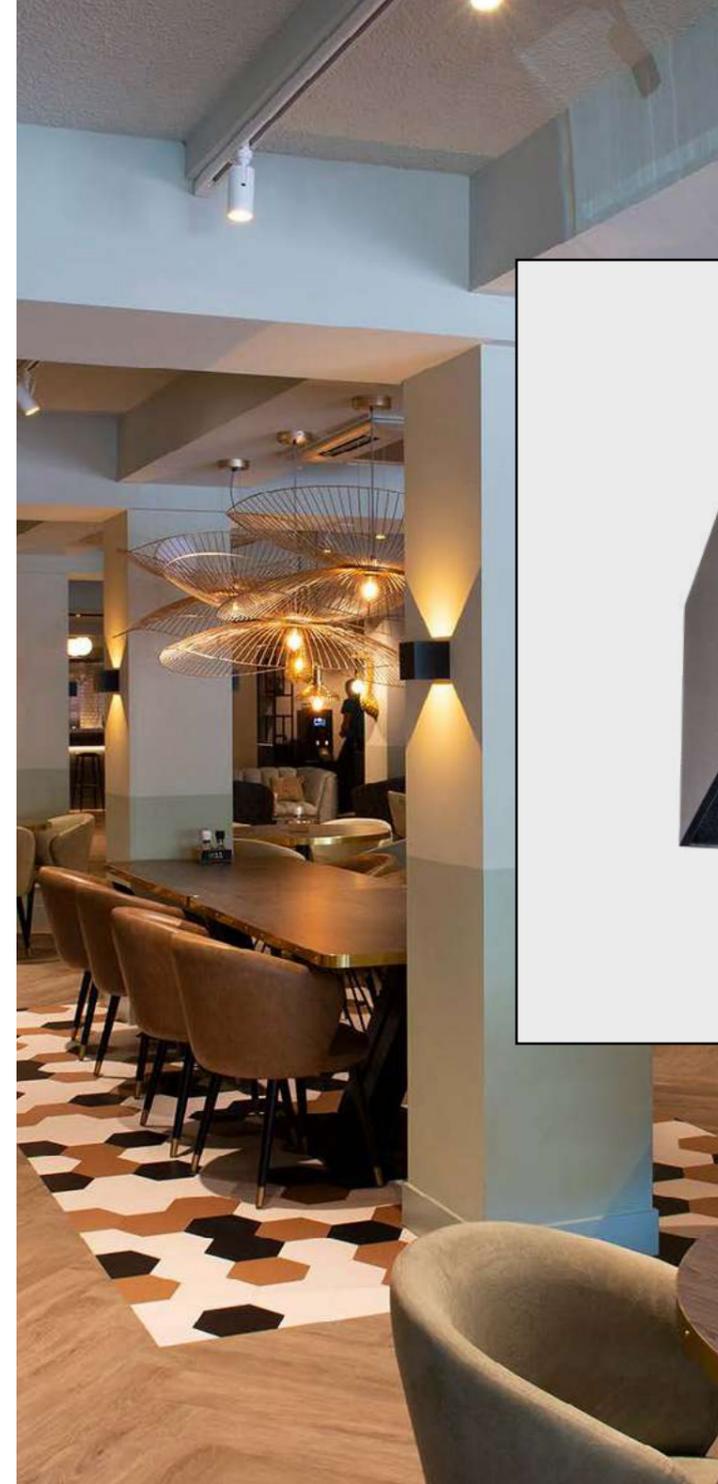

CUBO UP/DOWN

Compact IP65 wall fixture, up/down. Standard triac dimmable. Beam angle can be adjusted manually (1°-120°). Suitable for indoor and outdoor use.

Lumen : 2x 160lm
CRI : >80Ra
CCT : 2200K, 2700K, 3000K

Standard

Dimmable




Colour



Led modules

Standard




SNELLO



- Colour**
- Beam angle**
- Led modules**
- Options**

Surface mounted tubular LED spot. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver. 3m Suspension kit available.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K




ORIZZONTE



- Colour**
- Beam angle**
- Led modules**
- Options**

Economic surface mounted LED downlight with Philips Fortimo LED DLM and Philips Xitanium LED driver. Powder coating finish.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra
CCT : 3000K, 4000K




LIPARI



- Standard**
- Colour**
- Beam angle**
- Led modules**
- Options**

Surface mounted downlight with powder coating finish. Available in black (golden inner ring) and white (black inner ring). Standard Triac dimmable. Also available in a 3-circuit track version.


Lumen : 1500lm
CRI : >90Ra
CCT : 2700K




**INTER
NOVA**
PROFESSIONAL LIGHTING

PENDANT

Made-in-Holland Pendant LED luminaires available in different designs. From decorative to highly efficient luminaires with a high lumen-output and from hospitality to utility application, perfect to complete your project.

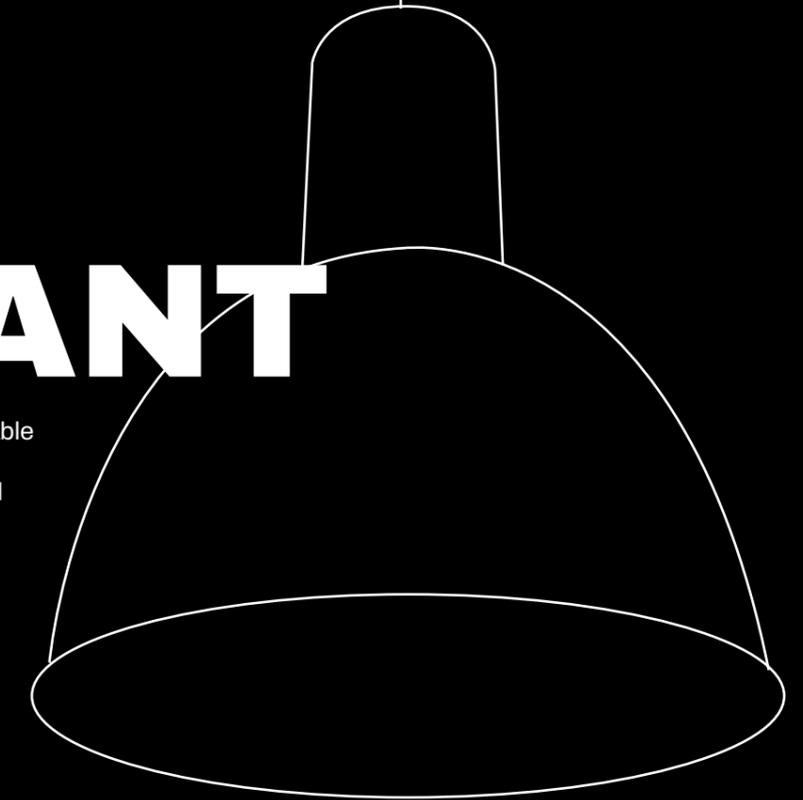

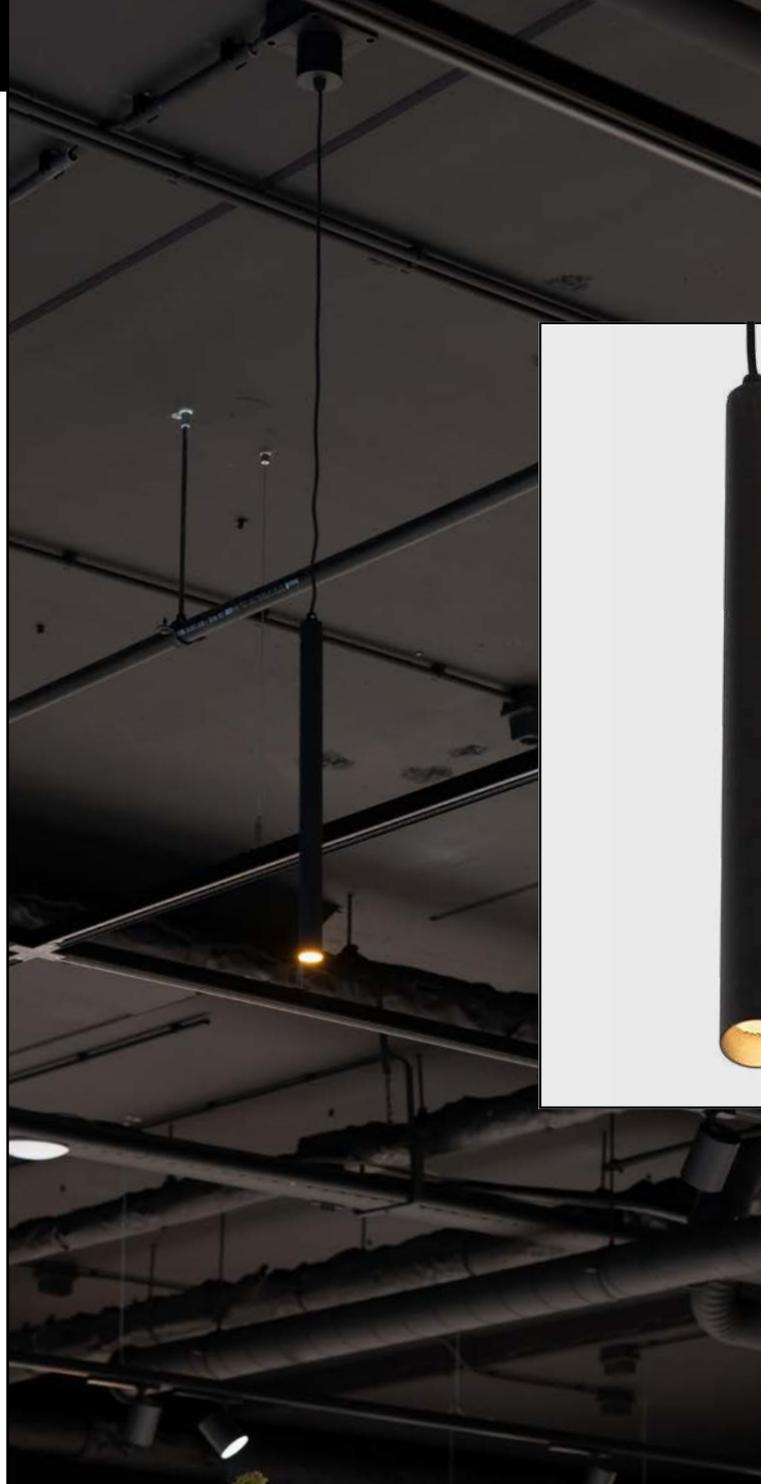

SALINA

Decorative pendant in powder coating finish. Available in black (golden inner ring) and white (black inner ring). Standard Triac dimmable. Suspension length 2 m. Supplied with ceiling cup, also available in a 3-circuit track version.

Lumen : 600lm
CRI : >90Ra
CCT : 2700K

Standard

Dimmable



Colour




Beam angle



Led modules

Standard

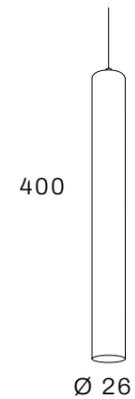

METEORA

PENDANT

Pendant version of the Meteora with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and residential projects. Suspension length 3m. Supplied with ceiling cup, also available in 3-circuit track version.

Lumen : 1100lm
CRI : >90Ra
CCT : 2700K, 3000K

Standard


Dimmable



Colour



Beam angle



Led modules

Standard




Options

Dimmable



Casambi

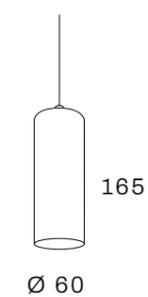

LUCEVARIA PENDANT



Linear pendant lighting (57cm, 113cm, 141cm) for the perfect utility lighting. Ideal to be used for desk and counter lighting. Supplied including suspension kit, suspension length 3m. Osram LED modules and driver inside.

570mm : 1500lm
1130mm : 3000lm
1410mm : 3850lm

CRI : >80Ra
CCT : 3000K, 4000K

Colour



Led modules

Standard



Options


Dimmable




Dimmable



Casambi

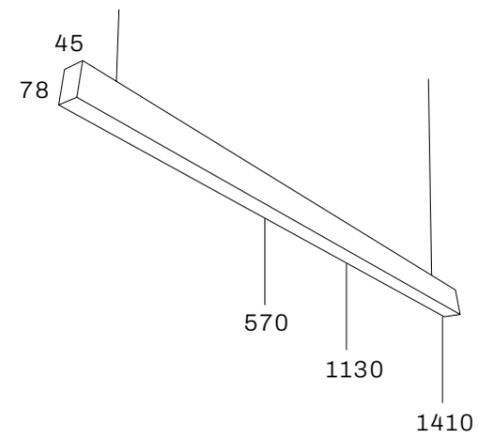



ALTA

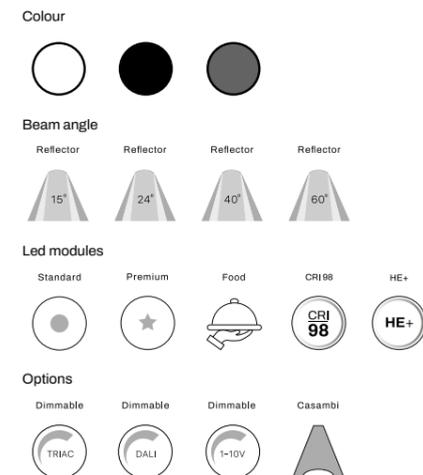

LED Pendant in industrial look, produced in die-cast aluminium. Supplied with Ø410mm prismatic polycarbonate shade. Suspension length 3m. Supplied with ceiling cup, also available in a 3-circuit track version. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K


RIVA

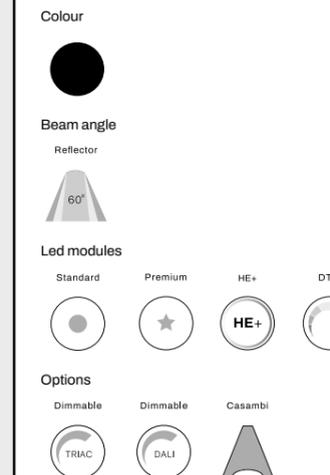

Vintage crafted pendant in matt black and white inside. Equipped with an E27 socket and 3m black fabric wire.

Supplied without lightsource, available upon request.

ROSWELL

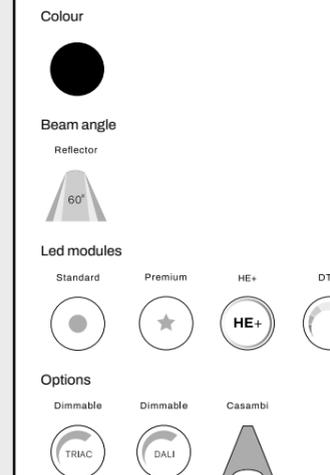

Industrial crafted LED pendant in vintage black outside and matt white inside. Suspension length 2m. Supplied with ceiling cup, also available in a 3-circuit track version. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

Lumen : 1100lm, 2000lm, 3000lm
CRI : >80Ra, >90Ra
CCT : 2700K, 3000K, 3500K, 4000K, 5700K



IT ALL
STARTS
WITH LIGHT


**INTER
NOVA**
PROFESSIONAL LIGHTING



NO Light
without
A PLAN

INTER NOVA

Rijnmeesterpark 21 4838 GZ Breda The Netherlands
+ 31 (0) 76 520 5566 info@internova.nl