

1481 - steel conical pole to be buried

Code: 425152-00

GENERAL INFORMATION



Article	1481 - steel conical pole to be buried
Code	425152-00

DIMENSIONS AND WEIGHT

Weight (Kg)	36 kg
-------------	-------



1481 palo conico in acciaio da interrare



## 1481 - steel conical pole to be buried


---

Code: 425152-00



1481 - steel conical pole to be buried

Code: 425152-00

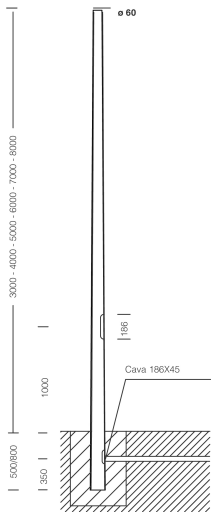

DOWNLOAD

Mounts

AssemblyInstructions 1480-1481 09-18.pdf

Designs

TechnicalDrawing 1481c.dxf

TechnicalDrawing3D disano 1481 tapered pole 7m.3ds



MATERIALS AND COLOURS

Housing	Hot-rolled steel, ø60 mast-top connection. With 2 x 16A fuses, removable 4-pole/3-way terminal block = 10mm2 and 2.5 mm2 shunt. Supplied as standard with Insulation Class II.
Pole connection	0
Coating	thermoset polyester powder coated.
Colour	Grey9007

STANDARDS AND COMPLIANCE





Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

WARRANTY

After sales warranty	0 yr
----------------------	------





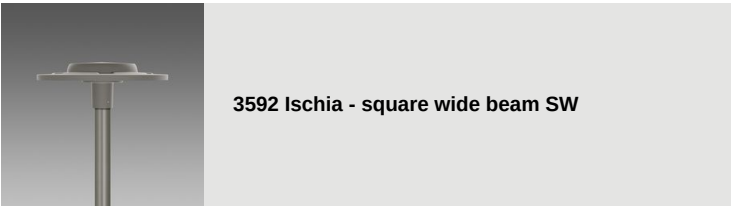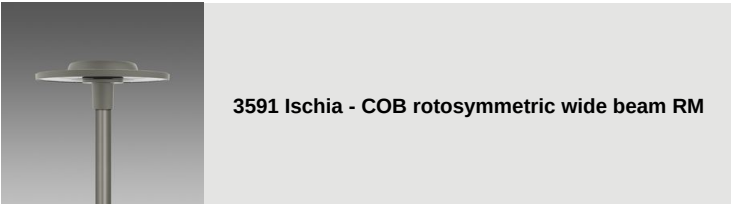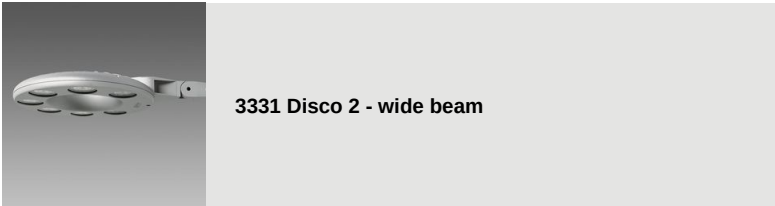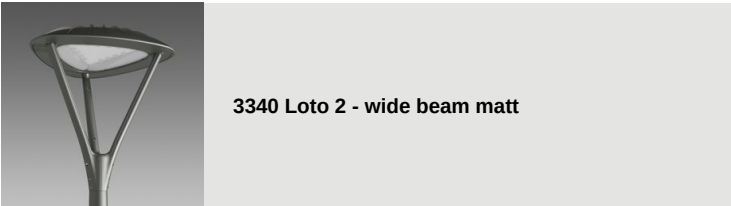











**1481 - steel conical pole to be buried**


Code: 425152-00




1481 - steel conical pole to be buried

Code: 425152-00

	3594 Ischia MIDNIGHT - cycle pedestrian symmetric CS		3595 Ischia MIDNIGHT - asymmetric medium beam AM
	3593 Ischia - cycle-pedestrian asymmetric CA		3593 Ischia MIDNIGHT - cycle-pedestrian asymmetric CA
	3596 Ischia - asymmetric wide beam AW		3595 Ischia - asymmetric medium beam AM
	3360 Iseo 1 - roto-symmetric		3361 Iseo 2 - street
	3362 Iseo 3 - centre street		3363 Iseo 4 - cycle lane
	3383 Como 1 - roto-symmetric		3384 Como 2 - asymmetric
	3385 Como 3 - cycle lane		3386 Como 4 - bi-asymmetric
	3350 Garda 1 - roto-symmetric		3351 Garda 2 - asymmetric

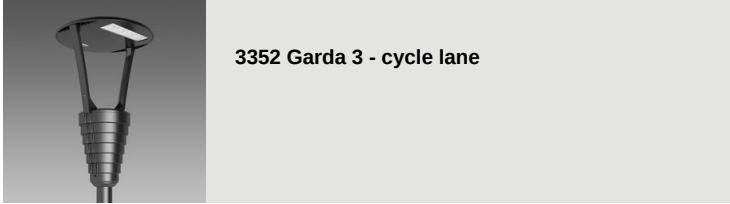

**3352 Garda 3 - cycle lane**

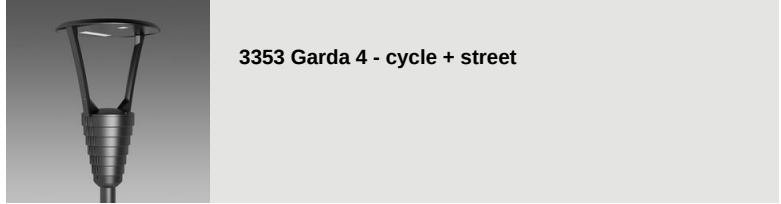


**3353 Garda 4 - cycle + street**



**3355 Garda 5 - roto-symmetric**




**3355 Garda 6 - roto-symmetric**

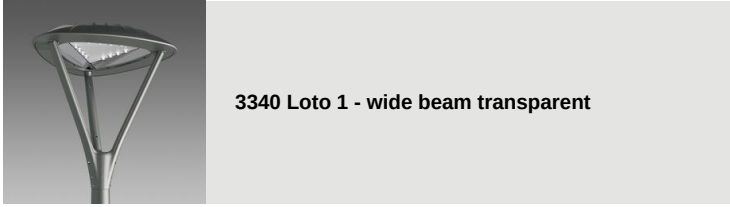

**3340 Loto 1 - wide beam transparent**




**3342 Loto 3 - asymmetric**

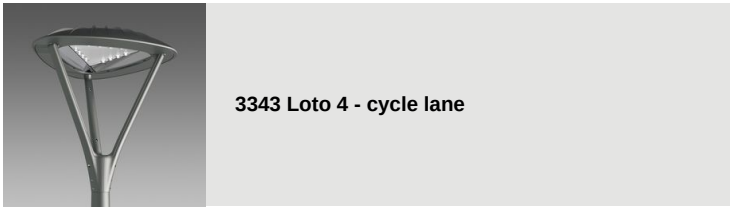

**3343 Loto 4 - cycle lane**



**3344 Loto 5 - wide beam**

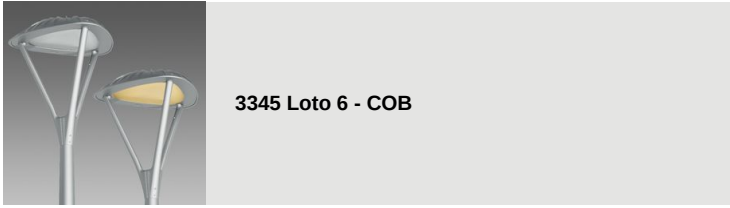

**3345 Loto 6 - COB**



**3345 Loto 6 - MIDNIGHT COB**



**3280 Rolle - T1**



**3283 Rolle - T4**



**3284 Rolle - T5**



**3334 Disco 5 - central connection**



**3336 Visconti 2.0 - roto-symmetric**




**3337 Visconti 2.0 - street ME**



**3338 Visconti 2.0 - cycle lane**



**3339 Visconti 2.0 - large areas**

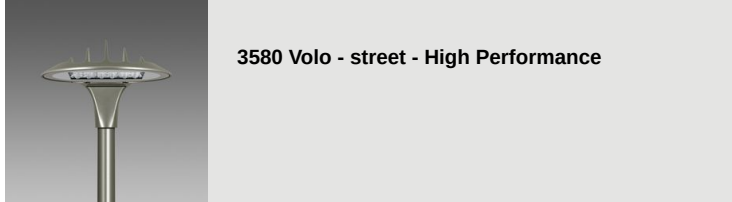

**3580 Volo - street - High Performance**



**3581 Volo - cycle + street**



**3582 Volo - cycle lane**




**3583 Volo - roto-symmetric**



**3281 Rolle - T2**



**3282 Rolle - T3**



**1513 Torcia LED COB**



**1707 Torcia LED**



**1708 Torcia LED**



**1205 Polar**

Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Tuesday, December 5, 2023