


1544 - Globo LED

Code: 427246-00



1544 Globo LED

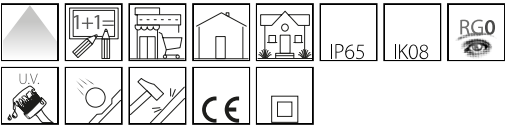

GENERAL INFORMATION

Article	1544 - Globo LED
Code	427246-00

DIMENSIONS AND WEIGHT

Height (mm)	124 mm
Diameter (Ø) (mm)	300 mm
Weight (Kg)	0.766 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Frequency (Hz)	50 Hz
Wiring name	CLD-S
Power factor	≥0.9
Insulation class	Class II
Controllability	None

1544 - Globo LED

Code: 427246-00



PHOTOMETRIC DATA


Lighting source	LED
Power absorption (total) (W)	0 W
CCT	0 K
LED flux maintenance	50000 hr, L 80, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65

1544 - Globo LED

Code: 427246-00

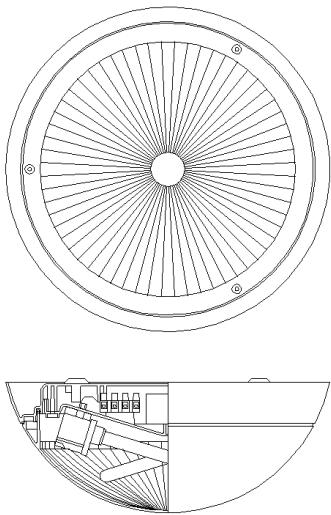

300
124

DOWNLOAD

MOUNTS

AssemblyInstructions 1544 04-23.pdf

DESIGNS

TechnicalDrawing 1544glb.dxf



MATERIALS AND COLOURS

Housing	in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing.
Diffuser	in anti-glare polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, externally smooth and dustproof.
Colour	Grey
Equipment	gasket in eco-friendly material. Rubber cable gland with diam. 1/2 gas inch (cable min. diam.9 max diam. 12).

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.

WARRANTY

After sales warranty	3 yr
----------------------	------