

# 690 Volts gG/gL NH Fuse links



## Product description

Eaton's Bussmann® series 690 V a.c. NH square bodied industrial fuse links are suitable for a wide variety of applications.

## Standard features

- Reliable dual indicator system
- Low temperature rise
- Globally compliant
- Compatible with Eaton's Bussmann series NH fuse bases and NH fuse gear

**Catalogue symbol:**

- (amp)NHG(size)B-690 with conducting metal gripping lugs
- (amp)NHG(size)BI-690 with insulated metal gripping lugs

**Fuse size:**

- 000 to 4\*

**Technical data:**

- Rated voltage:
  - 690 V a.c.
  - 400 V d.c. size 1 160 A
  - 440 V d.c. size 1 200 A and 250 A
- Rated current: 2 to 800 A
- Breaking capacity:
  - 120 kA AC at 690 V a.c.
  - 50 kA at 400 V d.c. for size 1 160 A
  - 50 kA at 440 V d.c. for size 1 200 A and 250 A
- Operating frequency: 45-62 Hz
- Class of operation: gG/gL

**Standards/Approvals:**

- IEC 60269
- VDE 0636
- DIN 43620

**Optional microswitches:**

NH Fuse body size	Suitable microswitch
Size 000	170H0236
Size 00	170H0236
Size 1	170H0236
Size 2	170H0235 or 170H0236
Size 3	170H0235
Size 4	Not available

**Compatible fuse holders and fuse gear (ordered separately)**

Description	Type	Data sheet number
Fuse bases 1-pole	DIN-Rail mounting SD-D	10163
	Screw mounting SD-S	10163
Fuse bases 3-pole	DIN-Rail mounting TD-D	10163
Fuse bases accessories	IP20, Shroud and phase barriers kits	10163
Fuse rails	Vertical - EBF	10240
Fuse switch disconnectors	Vertical - EBV	10275
	Horizontal - EBH Size 000	10292
	Horizontal - EBH Size 00 to 4	10293

**Packaging:**

- Sizes 000 to 3: 3 per carton
- Size 4: 1 per carton


690 Volts gG/gL NH Fuse links

Table 1. Catalogue numbers


Size	Rated current (Amps)	Rated voltage (V a.c.)	Rated voltage (V d.c.)	Breaking capacity	gG/gL dual indicator		Pack quantity
					Voltage conducting metal gripping lugs	Insulated metal gripping lugs	
000	2	690	N/A	120 kA	2NHG000B-690	N/A	3
000	4	690	N/A	120 kA	4NHG000B-690	N/A	3
000	6	690	N/A	120 kA	6NHG000B-690	N/A	3
000	10	690	N/A	120 kA	10NHG000B-690	10NHG000BI-690	3
000	16	690	N/A	120 kA	16NHG000B-690	16NHG000BI-690	3
000	20	690	N/A	120 kA	20NHG000B-690	20NHG000BI-690	3
000	25	690	N/A	120 kA	25NHG000B-690	25NHG000BI-690	3
000	32	690	N/A	120 kA	32NHG000B-690	32NHG000BI-690	3
000	35	690	N/A	120 kA	35NHG000B-690	35NHG000BI-690	3
000	40	690	N/A	120 kA	40NHG000B-690	40NHG000BI-690	3
000	50	690	N/A	120 kA	50NHG000B-690	50NHG000BI-690	3
000	63	690	N/A	120 kA	63NHG000B-690	63NHG000BI-690	3
00	16	690	N/A	120 kA	16NHG00B-690	-	3
00	20	690	N/A	120 kA	20NHG00B-690	-	3
00	25	690	N/A	120 kA	25NHG00B-690	-	3
00	32	690	N/A	120 kA	32NHG00B-690	-	3
00	35	690	N/A	120 kA	35NHG00B-690	-	3
00	40	690	N/A	120 kA	40NHG00B-690	-	3
00	50	690	N/A	120 kA	50NHG00B-690	50NHG00BI-690	3
00	63	690	N/A	120 kA	63NHG00B-690	63NHG00BI-690	3
00	80	690	N/A	120 kA	80NHG00B-690	80NHG00BI-690	3
00	100	690	N/A	120 kA	100NHG00B-690	100NHG00BI-690	3
00	125	690	N/A	120 kA	125NHG00B-690	125NHG00BI-690	3
00	160	660	N/A	120 kA	160NHG00B-660	-	3
1	50	690	N/A	120 kA	50NHG1B-690	50NHG1BI-690	3
1	63	690	N/A	120 kA	63NHG1B-690	63NHG1BI-690	3
1	80	690	N/A	120 kA	80NHG1B-690	80NHG1BI-690	3
1	100	690	N/A	120 kA	100NHG1B-690	100NHG1BI-690	3
1	125	690	N/A	120 kA	125NHG1B-690	125NHG1BI-690	3
1	160	690	400*	120 kA at 690 V a.c., 50 kA at 400 V d.c.*	160NHG1B-690	160NHG1BI-690	3
1	200	690	440*	120 kA at 690 V a.c., 50 kA at 440 V d.c.*	200NHG1B-690	200NHG1BI-690	3
1	224	690	N/A	120 kA	224NHG1B-690	224NHG1BI-690	3
1	250	690	440*	120 kA at 690 V a.c., 50 kA at 440 V d.c.*	250NHG1B-690	250NHG1BI-690	3
2	200	690	N/A	120 kA	200NHG2B-690	200NHG2BI-690	3
2	224	690	N/A	120 kA	224NHG2B-690	224NHG2BI-690	3
2	250	690	N/A	120 kA	250NHG2B-690	250NHG2BI-690	3
2	315	690	N/A	120 kA	315NHG2B-690	315NHG2BI-690	3
3	250	690	N/A	120 kA	250NHG3B-690	-	3
3	315	690	N/A	120 kA	315NHG3B-690	-	3
3	355	690	N/A	120 kA	355NHG3B-690	-	3
3	400	690	N/A	120 kA	400NHG3B-690	-	3
3	425	690	N/A	120 kA	425NHG3B-690	-	3
3	500	690	N/A	120 kA	500NHG3B-690	-	3
4	630	690	N/A	120 kA	630NHG4B-690	-	1
4	800	690	N/A	120 kA	800NHG4B-690	-	1

\* The V d.c. rating is only for the voltage metal gripping lugs option

Dimensions - size 000 - mm

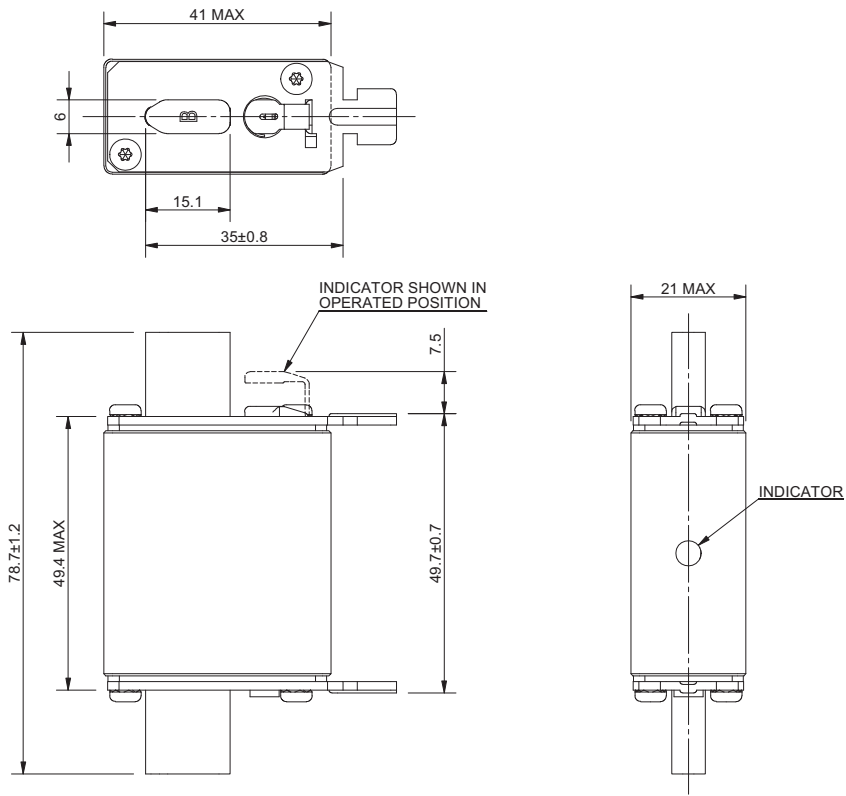


Dimensions - size 00 - mm

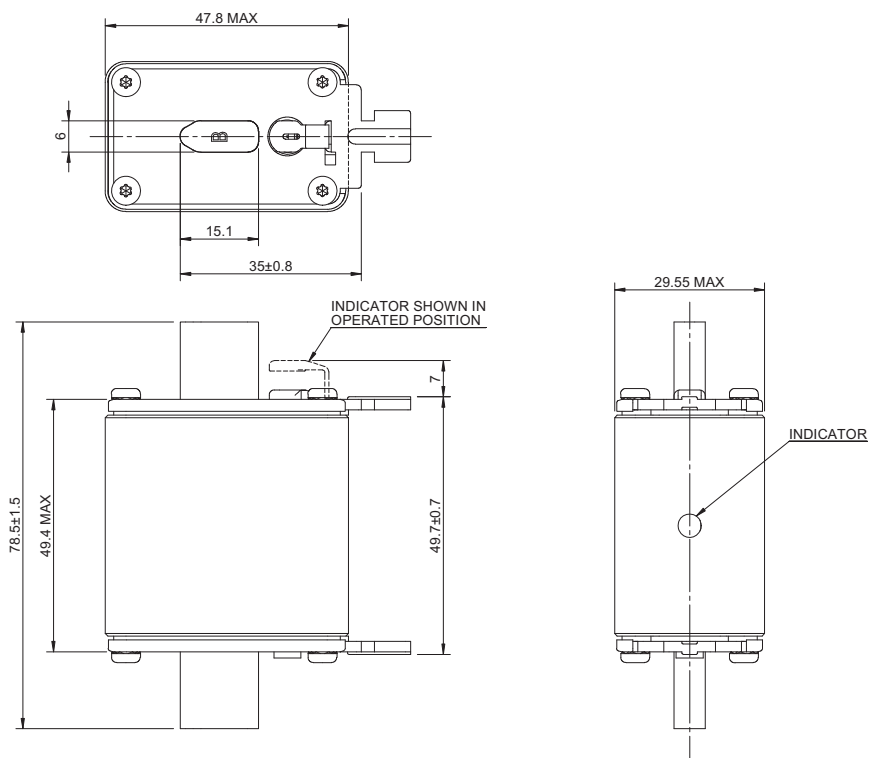


### 690 Volts gG/gL NH Fuse links


#### Dimensions - size 1 - mm

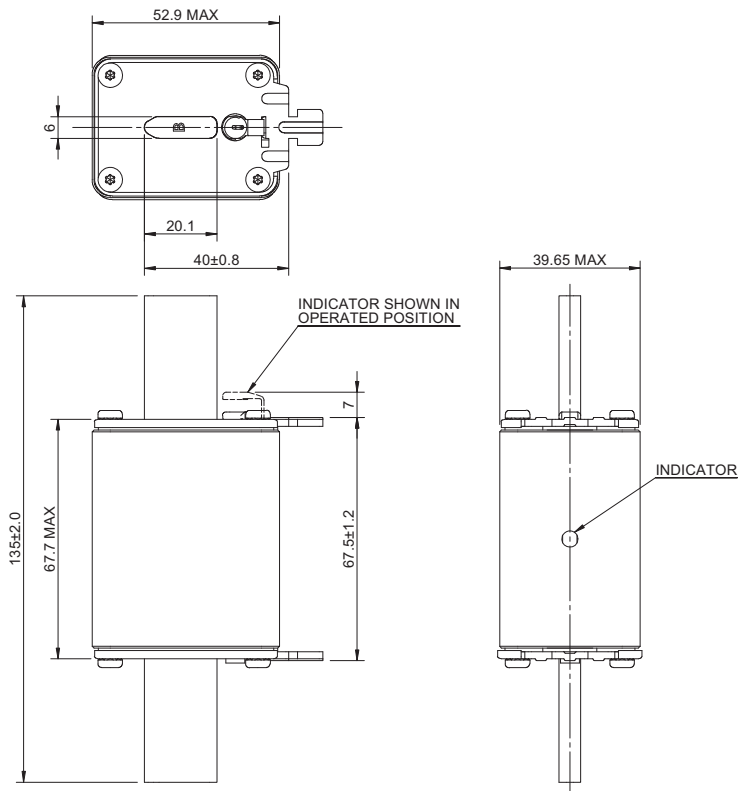


#### Dimensions - size 2 - mm

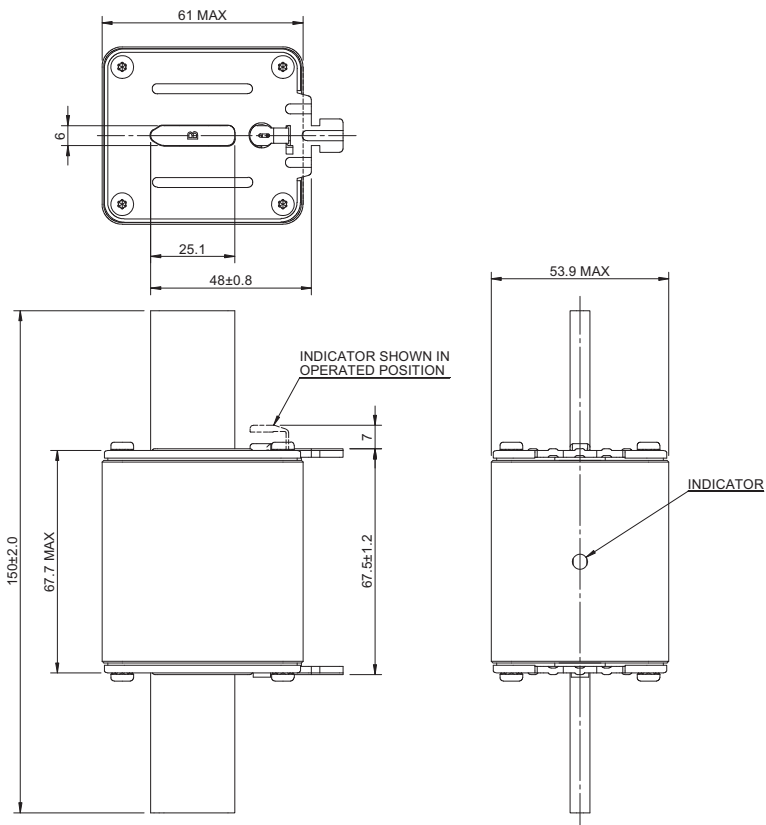


**Dimensions - size 3 - mm**

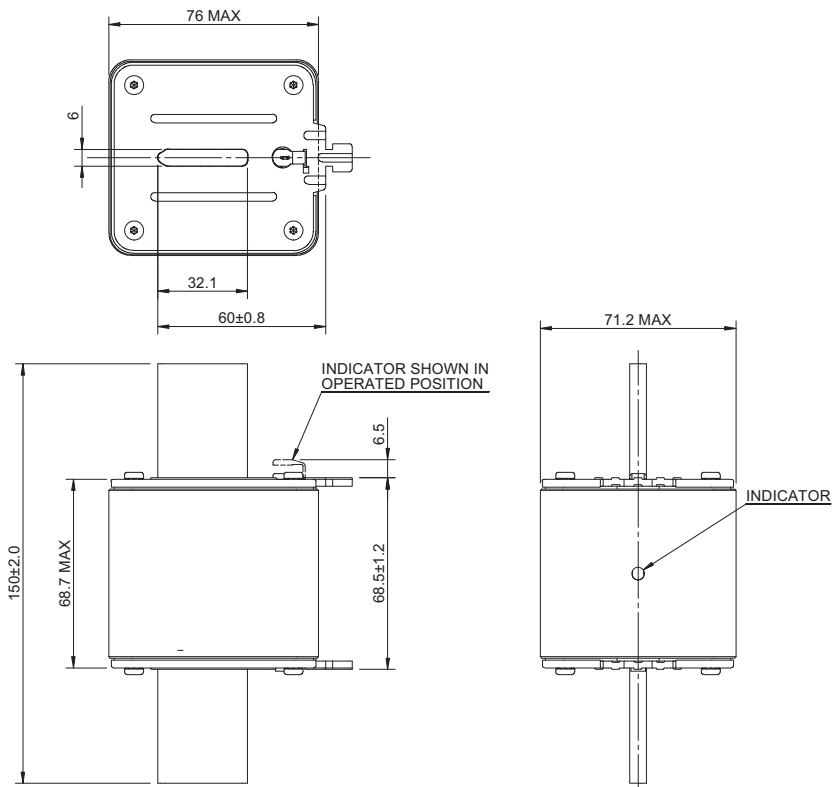

**Dimensions - size 4 - mm**

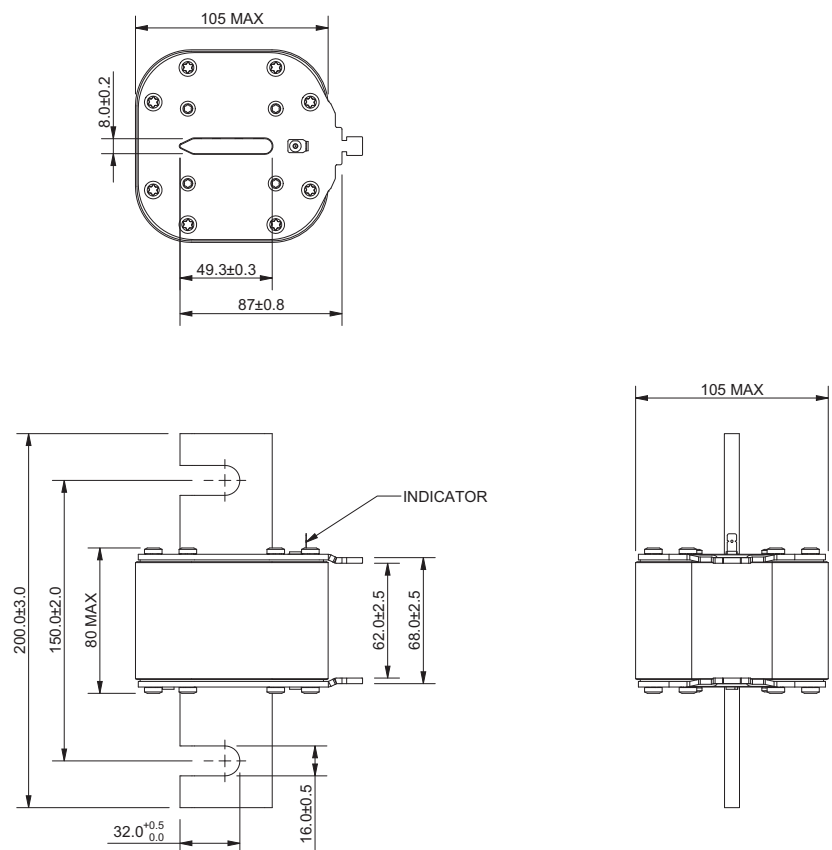

Time-current curves - NH Size 000

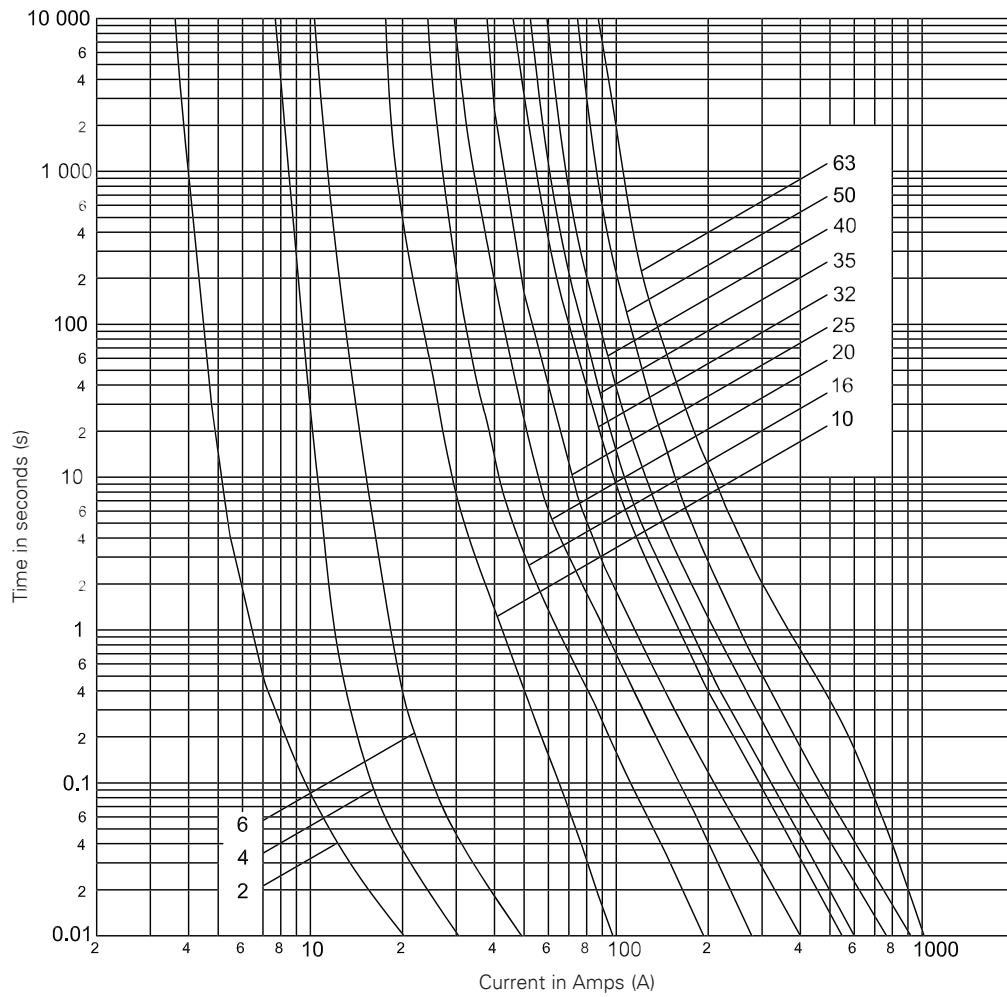


Technical data - NH size 000

Catalogue numbers with metal gripping lugs	Catalogue numbers with insulated metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
					Minimum pre-arcing	*I <sub>1</sub> , 120kA at 690 V a.c.	Watts loss	
2NHG000B-690	-	000	2	690	3.5	8	4	0.118
4NHG000B-690	-	000	4	690	6	16	2	0.118
6NHG000B-690	-	000	6	690	14	25	2	0.118
10NHG000B-690	10NHG000BI-690	000	10	690	60	400	1.5	0.118
16NHG000B-690	16NHG000BI-690	000	16	690	240	1200	2.5	0.118
20NHG000B-690	20NHG000BI-690	000	20	690	500	2500	2.5	0.118
25NHG000B-690	25NHG000BI-690	000	25	690	920	4400	3.5	0.118
32NHG000B-690	32NHG000BI-690	000	32	690	1800	9600	3.5	0.118
35NHG000B-690	35NHG000BI-690	000	35	690	2800	15,000	4	0.118
40NHG000B-690	40NHG000BI-690	000	40	690	3300	15,000	4	0.118
50NHG000B-690	50NHG000BI-690	000	50	690	6100	26,500	5.5	0.118
63NHG000B-690	63NHG000BI-690	000	63	690	6500	30,500	5.5	0.118

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 00 16 to 35 Amps

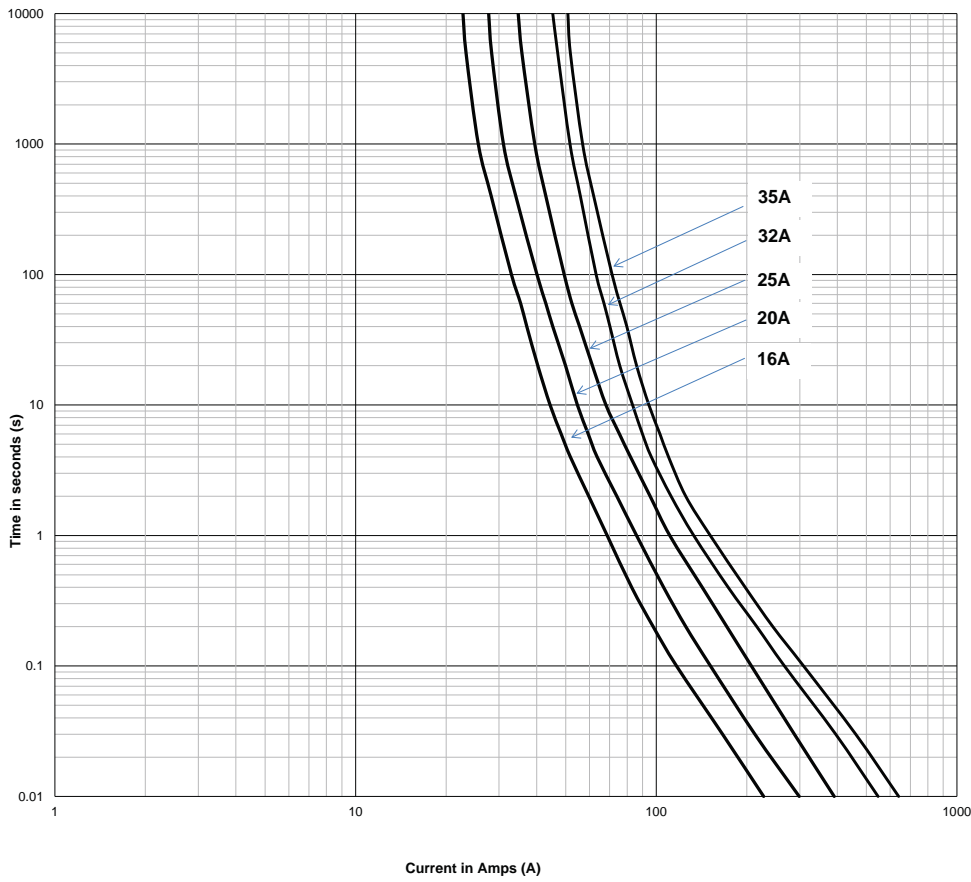

Technical data - NH size 00


Catalogue numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)		Watts loss	Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> , 120kA at 690 V a.c.		
16NHG00B-690	00	16	690	200	800	2.2	0.182
20NHG00B-690	00	20	690	425	1690	2.5	0.182
25NHG00B-690	00	25	690	870	3460	3	0.182
32NHG00B-690	00	32	690	1700	6750	3.5	0.182
35NHG00B-690	00	35	690	2100	8340	4	0.182

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements



### 690 Volts gG/gL NH Fuse links

Time-current curves - NH Size 00 40 to 160 Amps

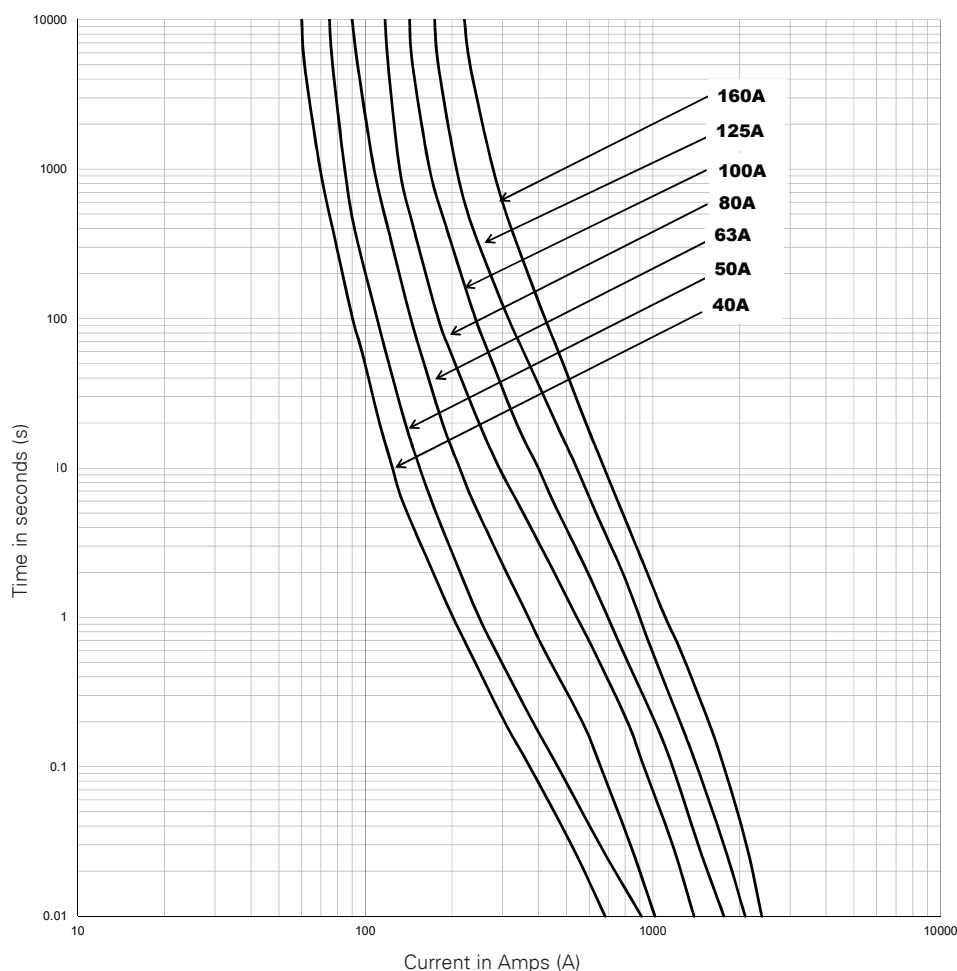


Technical data - NH size 00

Catalogue numbers with metal gripping lugs	Catalogue numbers with insulated metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
					Minimum pre-arcing	*I <sub>b</sub> , 120kA at 690 V a.c.	Watts loss	
40NHG00B-690	-	00	40	690	3240	19,438	3.9	0.182
50NHG00B-690	50NHG00BI-690	00	50	690	5800	35,000	5	0.182
63NHG00B-690	63NHG00BI-690	00	63	690	5800	43,000	5	0.182
80NHG00B-690	80NHG00BI-690	00	80	690	11,000	54,500	7	0.182
100NHG00B-690	100NHG00BI-690	00	100	690	19,000	92,000	7.5	0.182
125NHG00B-690	125NHG00BI-690	00	125	690	27,500	105,000	9.5	0.182
160NHG00B-660	-	00	160	660	40,500	135,000	13	0.182

\*I<sub>b</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 1

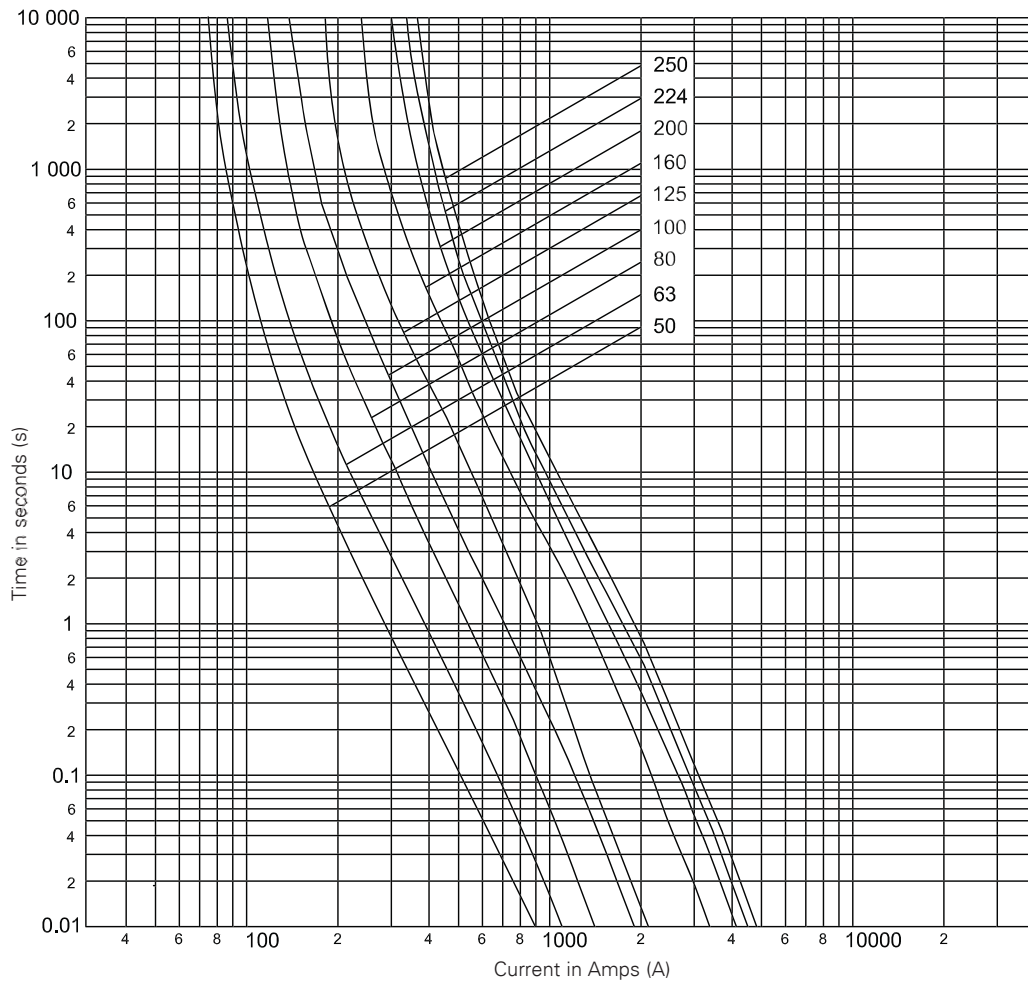


Technical data - NH size 1

Catalogue numbers with metal gripping lugs	Catalogue numbers with insulated metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	Rated voltage (V d.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
						Minimum pre-arcing	**I <sub>1</sub> , 120kA at 690 V a.c.	Watts loss	
50NHG1B-690	50NHG1BI-690	1	50	690	N/A	6350	26,500	6.4	0.38
63NHG1B-690	63NHG1BI-690	1	63	690	N/A	6800	36,000	5.6	0.38
80NHG1B-690	80NHG1BI-690	1	80	690	N/A	10,500	47,500	7.7	0.38
100NHG1B-690	100NHG1BI-690	1	100	690	N/A	22,000	105,000	8.2	0.38
125NHG1B-690	125NHG1BI-690	1	125	690	N/A	29,000	120,000	13	0.38
160NHG1B-690	160NHG1BI-690	1	160	690	400*	71,000	240,000	13	0.38
200NHG1B-690	200NHG1BI-690	1	200	690	440*	105,000	350,000	17	0.38
224NHG1B-690	224NHG1BI-690	1	224	690	N/A	120,000	430,000	19	0.38
250NHG1B-690	250NHG1BI-690	1	250	690	440*	150,000	520,000	22	0.38

\* The V d.c. rated voltage is for the metal gripping lugs versions only

\*\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 2

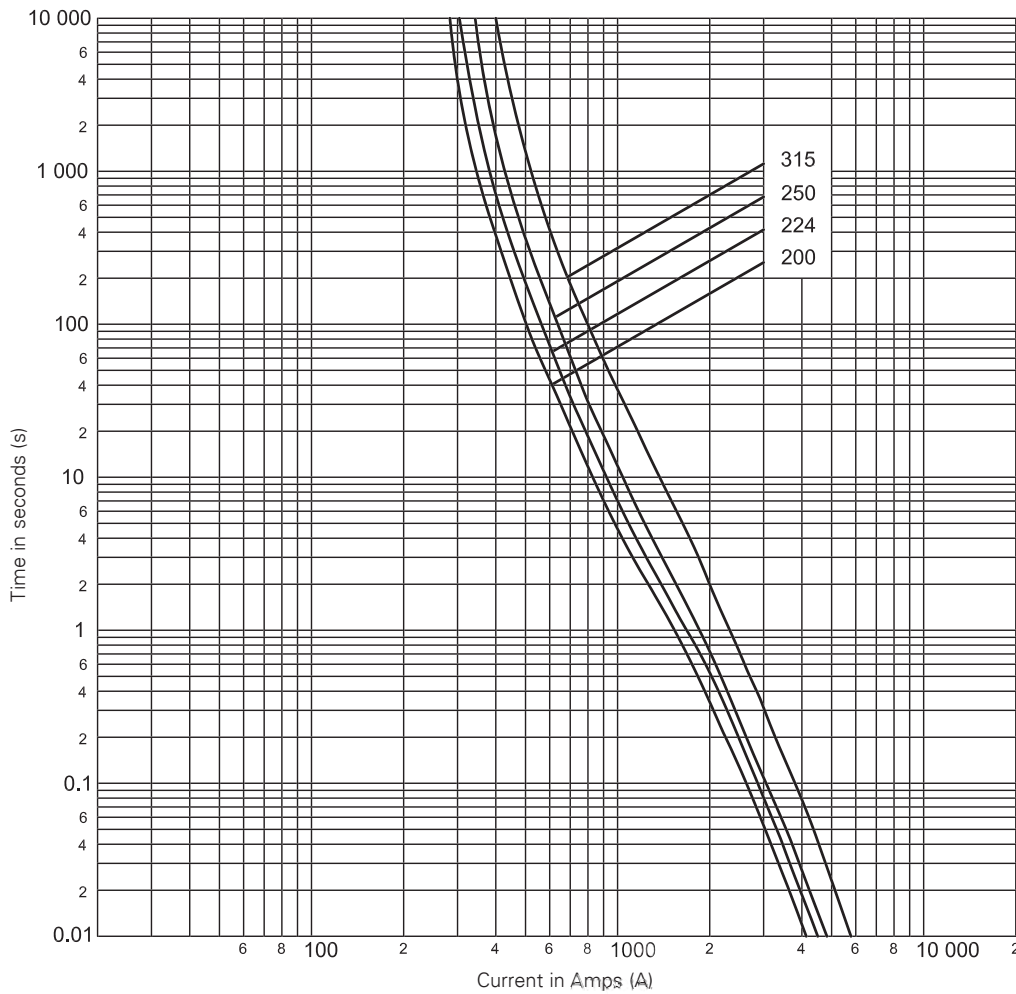


Technical data - NH size 2

Catalogue numbers with metal gripping lugs	Catalogue numbers with insulated metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)		Watts loss	Net weight per fuse (kg)
					Minimum pre-arcing	*I <sub>1</sub> 120kA at 690 V a.c.		
200NHG2B-690	200NHG2BI-690	2	200	690	99,000	385,000	18	0.62
224NHG2B-690	224NHG2BI-690	2	224	690	130,000	485,000	20	0.62
250NHG2B-690	250NHG2BI-690	2	250	690	170,000	625,000	23	0.62
315NHG2B-690	315NHG2BI-690	2	315	690	295,000	760,000	32	0.62

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 3

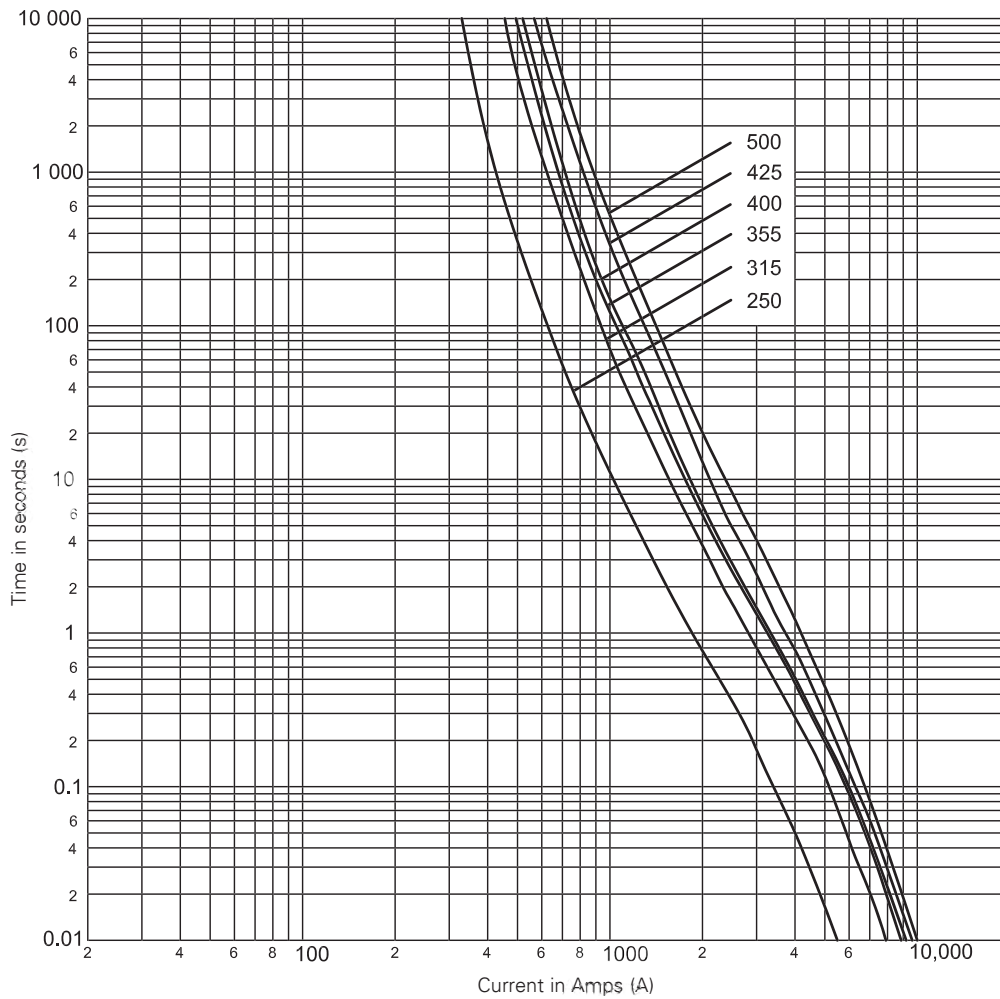


Technical data - NH size 3

Catalogue numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> 120kA at 690 V a.c.	Watts loss	
250NHG3B-690	3	250	690	160,000	715,000	21	0.38
315NHG3B-690	3	315	690	375,000	1,400,000	22	0.38
355NHG3B-690	3	355	690	400,000	1,650,000	25	0.38
400NHG3B-690	3	400	690	475,000	1,600,000	37	0.38
425NHG3B-690	3	425	690	630,000	1,700,000	35	0.38
500NHG3B-690	3	500	690	856,000	2,480,000	43	0.38

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Time-current curves - NH Size 4 Single indication slotted tags

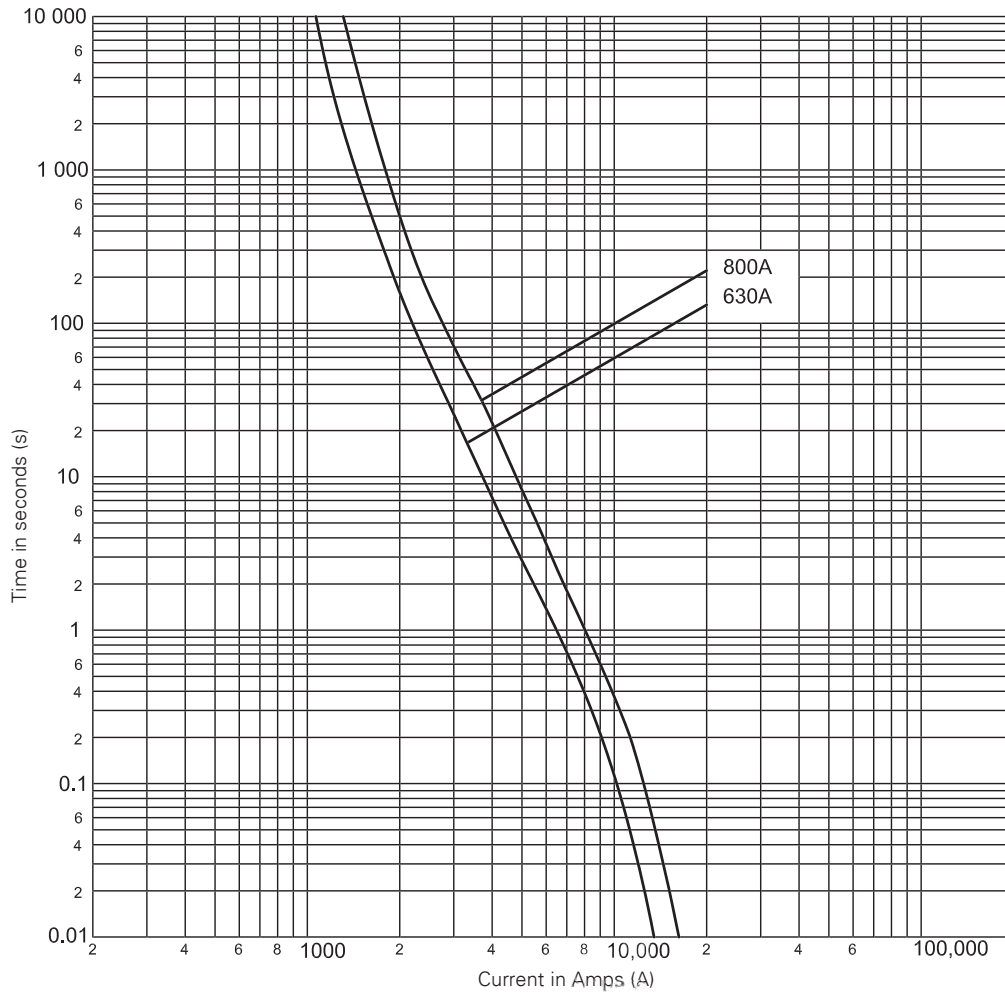

Technical data - NH size 4

Catalogue numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)		Watts loss	Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>1</sub> 120kA at 690 V a.c.		
630NHG4B-690	4	630	690	1,730,000	6,550,000	44	2.5
800NHG4B-690	4	800	690	3,330,000	11,000,000	61	2.5

\*I<sub>1</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

**Eaton**  
 EMEA Headquarters  
 Route de la Longeraie 7  
 1110 Morges, Switzerland

Eaton Electrical Products Limited  
 Unit 1, Hawker Business Park  
 Melton Road  
 Burton-on-the-Wolds  
 Leicestershire, LE12 5TH  
 United Kingdom

© 2020 Eaton  
 All Rights Reserved  
 PDF Only  
 Publication No. 720109  
 July 2020