


Simplified LCA - CABLE ENDS

The Functional Unit is to Linergy cable end insulated for clip-in marker. It applied to single conductor with 4 mm² cable cross section. It has red surface treatment. It conforms to NF C 63-023 standard. It is UL certified.

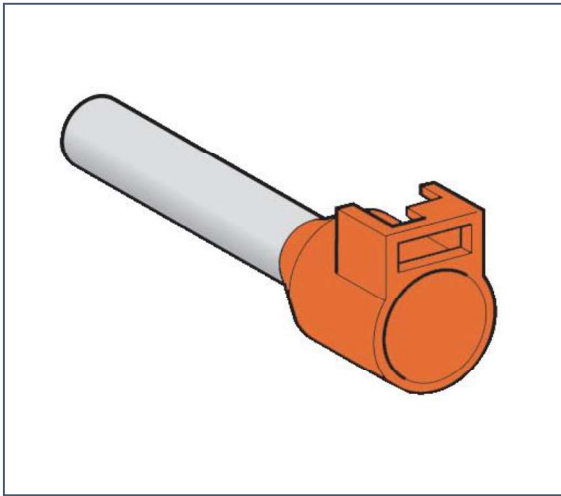

0.0042 kg of CO₂eq
Global warming*

Above Co2 Calculation for per piece.
It is 0,380 g per piece



4.20E-07 kg of Sbeq
Depletion of abiotic resources*




0.1 MJ
Total use of primary energy*

[For a taylor made communication, feel free to use the Environmental Savings Tool](#)

*Results extracted from a simplified life cycle analysis model, aligned with ISO 14040-44 principles - DO NOT COMPLY with ISO 14 025. The results are not comparable with any other assessment

Additional information

It is medium size for additional marker tag holder.
Ambient air temperature for operation is from -20 to 105 °C.
Packing by bag and quantity per set is 10 sets of 100.

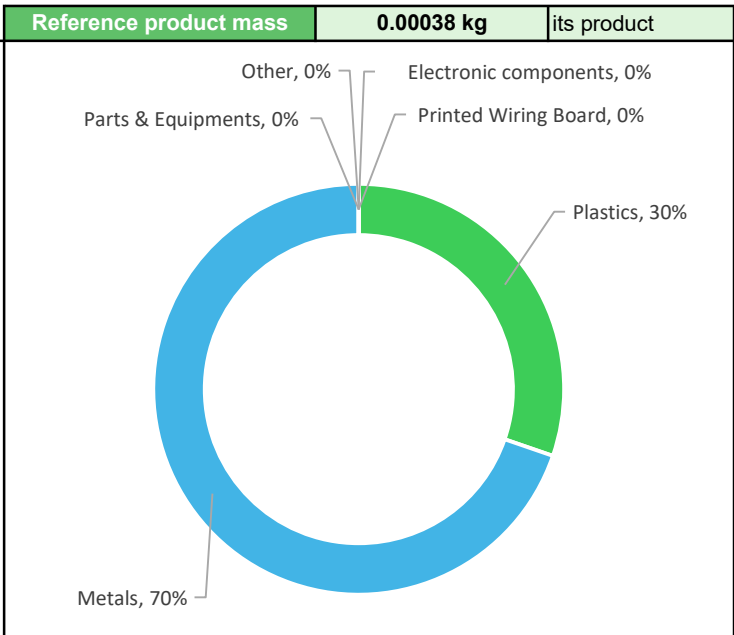

Schneider Electric Industries SAS
Country Customer Care Center <http://www.schneider-electric.com/contact>
35 rue Joseph Mounier
CS30323
F-92506 Rueil Malmaison Cedex
RCS Nanterre 954 504 439 Capital social 896 313 776€
www.se.com

Published by Schneider Electric
© 2019 - Schneider Electric – All rights reserved