

Pin busbar, 16 mm² connection: 4x (3-phase+AUX/FS) touch-safe

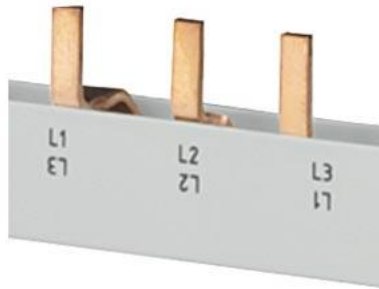


Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	16 mm ² , 4x(3PH+AS/FC)
General technical data	
phase number	3
cross-section	16 mm ²
Main circuit	
operational current rated value	80 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	11 mm
length	240 mm
net weight	128.81 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)




[Miscellaneous](#)

other	Environment
Confirmation	Environmental Confirmations
	Environmental Confirmations

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3647>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

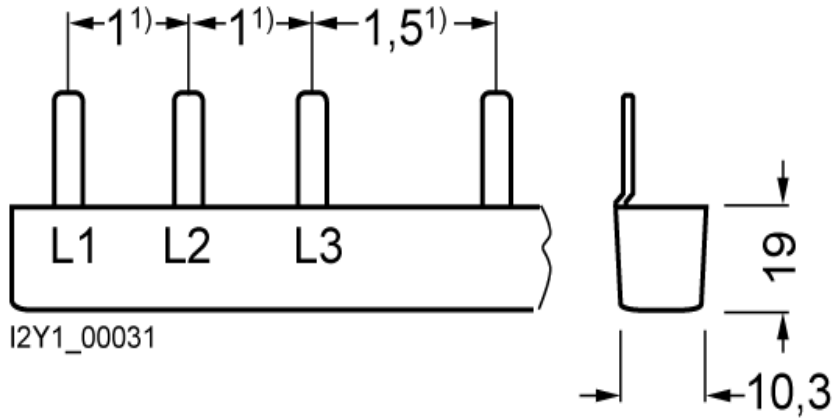

1) Pin spacings in MW (Modular widths, 1 MW = 18

