

Pin busbar touch-safe, 10 mm² 1-phase+AUX 1016 mm long can be cut, without end caps



Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	10 mm ² , 1PH+AS L1016 mm
General technical data	
phase number	1
cross-section	10 mm ²
Main circuit	
operational current rated value	63 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	15.5 mm
length	1 016 mm
net weight	146.27 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other	Environment
-------	-------------

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=5ST3733>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/5ST3733>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5ST3733

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

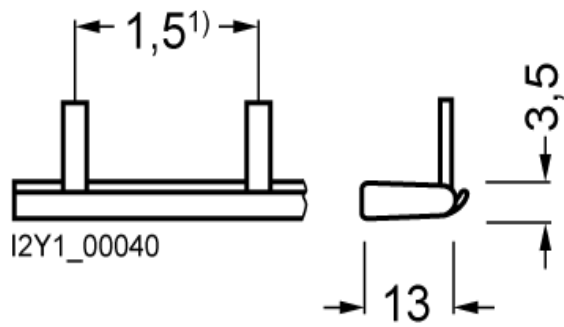

1) Pin spacings in MW (Modular widths, 1 MW = 18



last modified:

7/9/2021

