



Auxiliary switch, 1 NO+1 NC, accessories for main and emergency switching-off 3LD2 switch floor mounting, installation in distribution boards, molded-plastic encapsulation and for molded case switch 3LD5 UL floor mounting

Model	
product brand name	SETRON
product designation	auxiliary switch
design of the product	accessories for 3LD2 main and EMERGENCY-STOP switches, floor mounting, installation in distribution boards, molded-plastic enclosure
operational current	• at AC-15 at 110 V rated value • at AC-15 at 230 V rated value • at AC-15 at 500 V rated value • at DC-13 at 24 V rated value 6 A 3 A 1.4 A 4 A
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
tightening torque with screw-type terminals	• minimum • maximum 0.8 N·m 1.2 N·m

Approvals Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)



other	Environment
-------	-------------

[Miscellaneous](#)


[Confirmation](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-5C>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-5C>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-5C
CAx-Online-Generator
<http://www.siemens.com/cax>

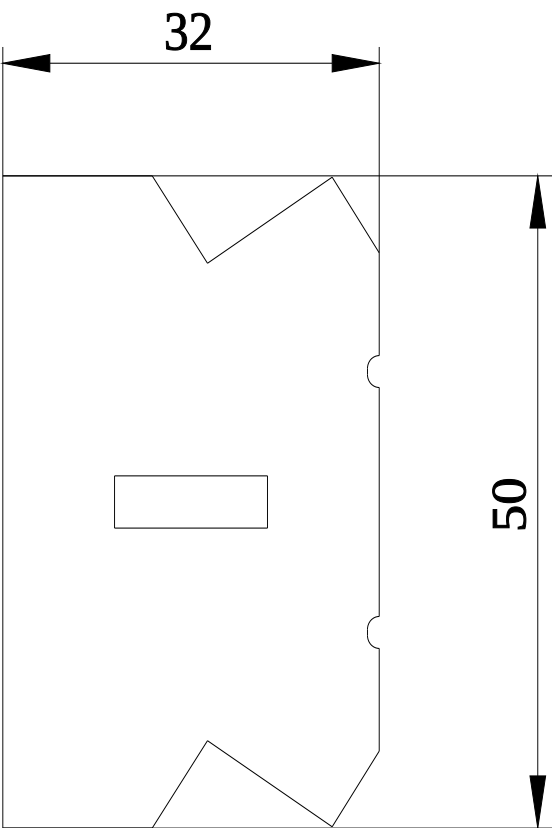

last modified:

4/18/2024 