

Pin busbar, 10 mm² connection: 6x (1-phase+AUX/FS) touch-safe

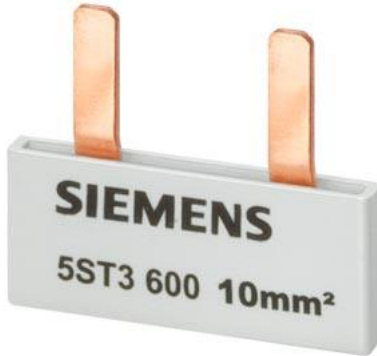


Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	10 mm ² , 6X(1PH+AS/FC)
General technical data	
phase number	1
cross-section	10 mm ²
Main circuit	
operational current rated value	63 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	3.8 mm
length	158 mm
net weight	27.82 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other	Environment
-------	-------------


[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3604>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

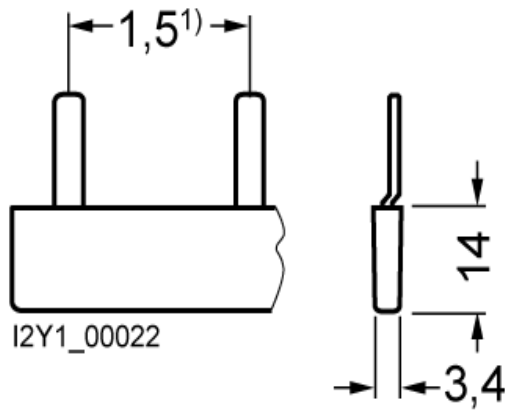

1) Pin spacings in MW (Modular widths, 1 MW = 18

