

RefLED Superia Retro MR16 DIMMABLE

RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL
0029216



Product features

- Premium performance professional LED MR16 range with the same look and feel of traditional halogen MR16 lamp
- Recreates backlight effect similar to halogen dichroic lamps.
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- Switching cycles: >100,000
- Colour rendering: CRI80
- Lamp voltage: 12V AC/DC
- Dimmable on approved dimmers
- Works with magnetic and compatible electronic transformers
- Warranty: 5 Years



PRODUCT OVERVIEW

Product name	RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL
Technology	LED
Watt (Rated) (W)	4.4
Type	LED exchangeable
Cap/Base	GU5.3
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
ETIM Class	EC001959
E-number FI	4741096
Warranty	5 years
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.4
Product Voltage (V)	12
Dimmable	Yes
Average life (Nominal) (h)	25000
Product EAN number	5410288292168

DATA TABLE

General data

Product name	RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL
Technology	LED
Watt (Rated) (W)	4.4
Type	LED exchangeable

RefLED Superia Retro MR16 DIMMABLE

RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL

0029216

Cap/Base	GU5.3
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature T _a (°C)	25
ETIM Class	EC001959
E-number FI	4741096
Warranty	5 years

Optical data

Rated Luminous Flux Useful (lm)	380
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Rated Luminous Intensity (cd)	900
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	4.4
Equivalent watt (W)	35
Product Voltage (V)	12
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	Yes
Dimmable	Yes
Inrush Current (A)	6.5
Inrush Duration (µs)	500
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

Physical data

Nominal Product Length (mm)	44
Nominal Product Diameter (mm)	50
Weight (kg)	0.03

Packaging

Single packaging type	Carton
Product EAN number	5410288292168

RefLED Superia Retro MR16 DIMMABLE


RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL
0029216

Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	25410288292162
Units per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	13.2
Packaging inner depth (cm)	9.3
DUN14 (outer)	15410288292165
Units per outer package	48
Packaging outer length / height (cm)	34.6
Packaging outer width (cm)	28.2
Packaging outer depth (cm)	20.8


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Suitable for approved transf./dimmers

PHOTOMETRY

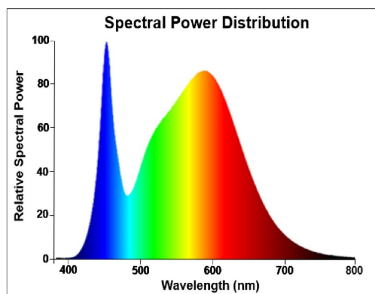

TECHNICAL DRAWINGS




RefLED Superia Retro MR16 DIMMABLE

RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL
0029216



SYLVANIA

0029216

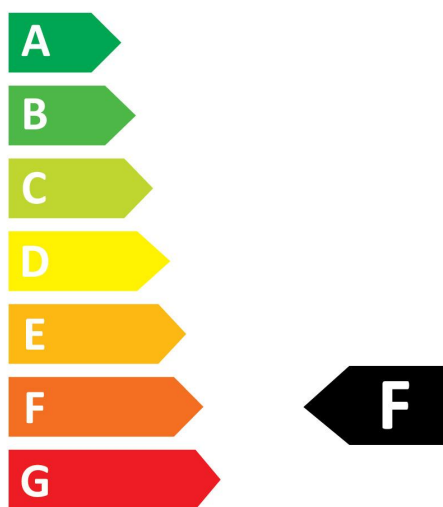

5
kWh/1000h




2019/2015

RefLED Superia Retro MR16 DIMMABLE

RefLED Superia Retro MR16 V2 380LM DIM 840 36 SL
0029216



0029216

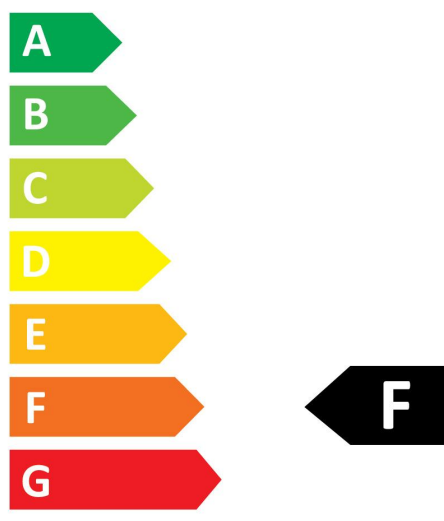

5
kWh/1000h



2019/2015