


## START Panel IP40 UGR19 1200x300

START Panel UGR19 1200x300 3800Lm 840 LILO  
0042837



### Product features

- LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle, optical system: PS diffuser with Prismatic finish. Light color temperature: 4000K Neutral White, total system power: 36W, total fixture output: 3800lm, efficacy: 106 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 25mm nominal height, White color frame, weight: 1,9Kg.

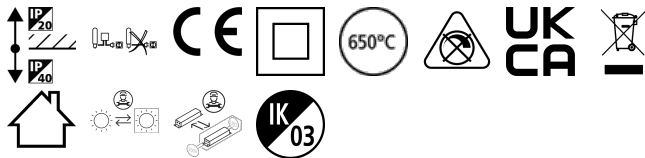

### PRODUCT OVERVIEW

Product name	START Panel UGR19 1200x300 3800Lm 840 LILO
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278463
Warranty	5 years
Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288428376
Dimming method	N/A

## START Panel IP40 UGR19 1200x300

*START Panel UGR19 1200x300 3800Lm 840 LILO*  
0042837

### DATA TABLE

#### General data

Product name	START Panel UGR19 1200x300 3800Lm 840 LILO
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C - 45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278463
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20.0
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>25000
Transformer required	No
Dimmable	No
Drive current (mA)	680
Inrush Current (A)	17
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	51

## START Panel IP40 UGR19 1200x300

*START Panel UGR19 1200x300 3800Lm 840 LILO*  
0042837

Max. Luminaires per 13A C Breaker	66
Max. Luminaires per 16A C Breaker	81
Max. Luminaires per 20A C Breaker	102
Max. Luminaires per 10A B Breaker	33
Max. Luminaires per 13A B Breaker	43
Max. Luminaires per 16A B Breaker	54
Max. Luminaires per 20A B Breaker	68

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	26
Weight (kg)	1.9

### Packaging


Single packaging type	Carton
Product EAN number	5410288428376
Packaging single length / height (cm)	30.0
Packaging single width (cm)	124.5
Packaging single depth (cm)	3.8
DUN14 (outer)	15410288428373
Units per outer package	4
Packaging outer length / height (cm)	125.0
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	17.0

### Safety data

Optimal operating condition (°C)	-10-45
----------------------------------	--------

## PHOTOMETRY

## START Panel IP40 UGR19 1200x300 *START Panel UGR19 1200x300 3800Lm 840 LILO* 0042837

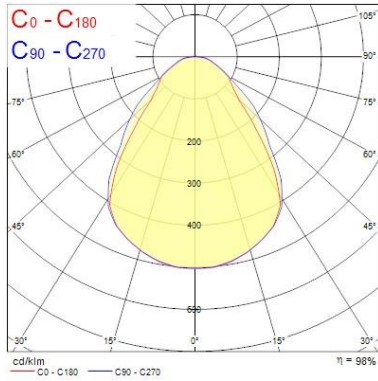

0.5	0.91 0.80	E(0°) E(C90) E(C0)	42.4° 38.7°	759 158 158
1.0	1.83 1.60	E(0°) E(C90) E(C0)	42.4° 38.7°	1596 302 302
1.5	2.74 2.40	E(0°) E(C90) E(C0)	42.4° 38.7°	542 170 201
2.0	3.65 3.20	E(0°) E(C90) E(C0)	42.4° 38.7°	474 96 113
2.5	4.57 4.01	E(0°) E(C90) E(C0)	42.4° 38.7°	303 61 72
3.0	5.48 4.81	E(0°) E(C90) E(C0)	42.4° 38.7°	211 42 50
Distance [m]		Cone diameter [m]		Illuminance [lx]
— C0 - C180 (Half beam angle: 77.4°)		— C90 - C270 (Half beam angle: 94.8°)		

### TECHNICAL DRAWINGS

