

## OptiClip 600x600

OptiClip 600 4000K C9 WH DALI WHITE

0044017



### Product features

- OPTICLIP 600 4000K C9 WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP20, IK07, DALI Dimmable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3275lm luminous flux, 29W power consumption, 113lm/W system efficacy, CRI>90, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.



### PRODUCT OVERVIEW

Product name	OptiClip 600 4000K C9 WH DALI WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3275
Luminaire efficacy (lm/W)	113
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Glare control	< 17
Photobiological Risk Group	RG1
Total power consumption (W)	29
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288440170
Dimming method	DALI

### DATA TABLE

## OptiClip 600x600

*OptiClip 600 4000K C9 WH DALI WHITE*

0044017

### General data

Product name	OptiClip 600 4000K C9 WH DALI WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-25°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	3275
Luminaire efficacy (lm/W)	113
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Rated Luminous Intensity (cd)	1920
Beam Angle (°)	80
Distribution type	Symmetric
Glare control	< 17
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	29
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	800
Inrush Current (A)	23
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E, E(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	23
Max. Luminaires per 13A C Breaker	31
Max. Luminaires per 16A C Breaker	38
Max. Luminaires per 20A C Breaker	48

## OptiClip 600x600

*OptiClip 600 4000K C9 WH DALI WHITE*

0044017

Max. Luminaires per 10A B Breaker	14
Max. Luminaires per 13A B Breaker	19
Max. Luminaires per 16A B Breaker	23
Max. Luminaires per 20A B Breaker	29

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	62500

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	20
Weight (kg)	2.9

### Packaging

Single packaging type	Carton
Product EAN number	5410288440170
Packaging single length / height (cm)	60.0
Packaging single width (cm)	4.0
Packaging single depth (cm)	60.0
DUN14 (outer)	05410288440170
Units per outer package	1
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	4.0
Packaging outer depth (cm)	60.0

### Safety data

Optimal operating condition (°C)	-25-25
----------------------------------	--------


## PHOTOMETRY

## OptiClip 600x600 OptiClip 600 4000K C9 WH DALI WHITE 0044017

0.5	0.84 0.82	E(0°) E(C90) E(C0)	1692 1732 1771
1.0	1.68 1.65	E(0°) E(C90) E(C0)	1923 432 443
1.5	2.53 2.47	E(0°) E(C90) E(C0)	555 192 197
2.0	3.37 3.30	E(0°) E(C90) E(C0)	421 108 111
2.5	4.21 4.12	E(0°) E(C90) E(C0)	308 89 71
3.0	5.05 4.95	E(0°) E(C90) E(C0)	214 68 68

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 75.0°)  
— C90 - C270 (Half beam angle: 90.2°)

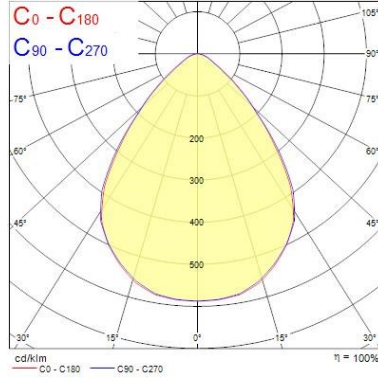

## TECHNICAL DRAWINGS

