

Quadro UGR16 600x600 Multipower


QUADRO UGR16 600x600 MUL TIPOWER 2050-4500LM 830

0047251



Product features

- Unique stylish recessed modular Led luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75 degree beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K Warm White, total system power: 34W, total fixture output: 4500lm, efficacy: 140 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 77,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non-dimmable 8-step Multipower driver (15W 2050lm, 18W 2450lm, 21W 2950lm, 24W 3300lm, 27W 3700lm, 30W 4000lm, 32W 4300lm, 34W 4500lm), electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,2Kg.

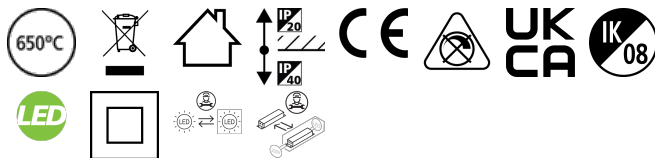

PRODUCT OVERVIEW

Product name	QUADRO UGR16 600x600 MULTIPOWER 2050-4500LM 830
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278096
Warranty	5 years
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288472515
Dimming method	N/A
Max load (A)	0.23

Quadro UGR16 600x600 Multipower

QUADRO UGR16 600x600 MUL TIPOWER 2050-4500LM 830

0047251

DATA TABLE

General data

Product name	QUADRO UGR16 600x600 MULTIPOWER 2050-4500LM 830
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	-10°C - 50°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC002892
E-number FI	4278096
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Total power consumption (W)	34
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	25.0
Mains frequency (Hz)	50/61Hz
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast multiwatt
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Drive current (mA)	155
Inrush Current (A)	40
Inrush Duration (µs)	150
Glow Wire Test (°C)	650

Quadro UGR16 600x600 Multipower

QUADRO UGR16 600x600 MUL TIPOWER 2050-4500LM 830

0047251

Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	48
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	75
Max. Luminaires per 10A B Breaker	32
Max. Luminaires per 13A B Breaker	41
Max. Luminaires per 16A B Breaker	52
Max. Luminaires per 20A B Breaker	64

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	77000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	18.8
Weight (kg)	3.11
Recessed Depth (mm)	60

Packaging


Single packaging type	Carton
Product EAN number	5410288472515
Packaging single length / height (cm)	60.6
Packaging single width (cm)	2.8
Packaging single depth (cm)	64.5
DUN14 (outer)	15410288472512
Units per outer package	1
Packaging outer length / height (cm)	60.6
Packaging outer width (cm)	2.8
Packaging outer depth (cm)	64.5

Safety data


Optimal operating condition (°C)	-10-50
----------------------------------	--------

PHOTOMETRY


Quadro UGR16 600x600 Multipower QUADRO UGR16 600x600 MUL TIPOWER 2050-4500LM 830 0047251

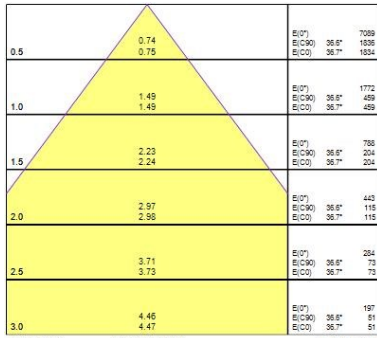


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

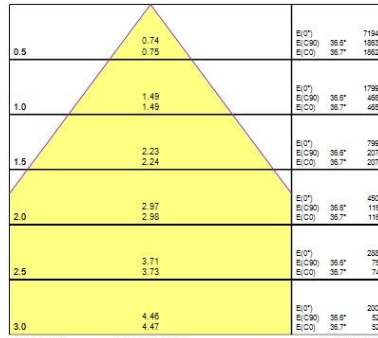


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

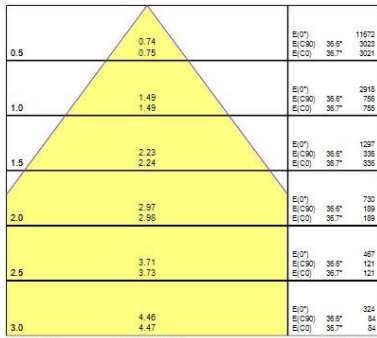


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

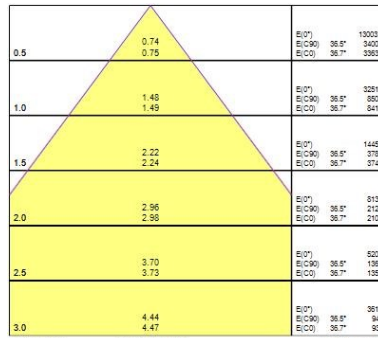


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

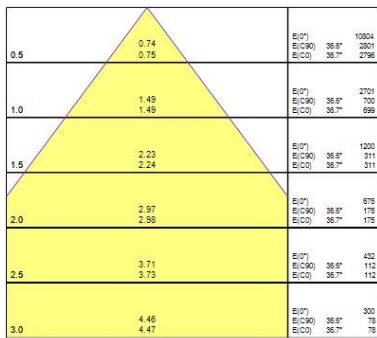


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

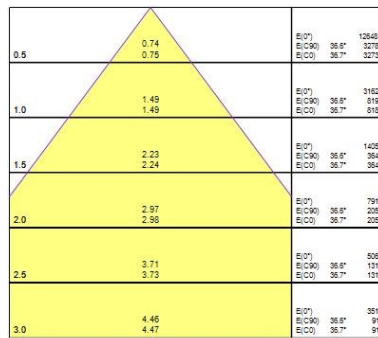


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

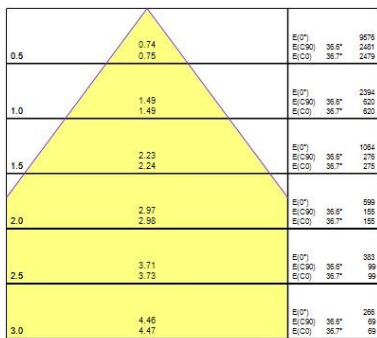

Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 73.4°)
 C90 - C270 (Half beam angle: 73.2°)

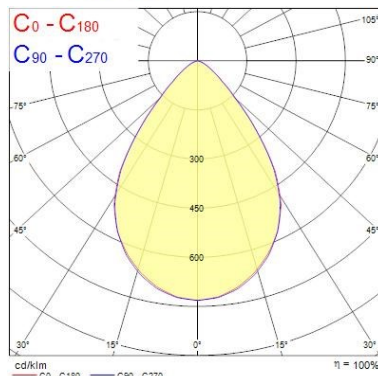

Quadro UGR16 600x600 Multipower *QUADRO UGR16 600x600 MUL TIPOWER 2050-4500LM 830* 0047251

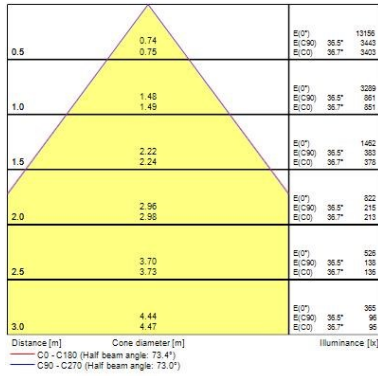

TECHNICAL DRAWINGS

