


## START eco Flex RGB and RGBW

START ECO FLEX IP67 RGBW  
0068124



### Product features

- 5 metre IP67 LED reel with pre-attached 3M adhesive type; 24V; RGBW; White colour 2700K

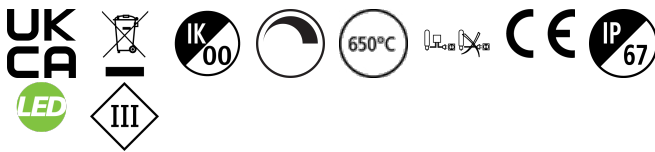

## PRODUCT OVERVIEW

Product name	START ECO FLEX IP67 RGBW
Technology	LED
Housing	PVC
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276990
Warranty	3 years
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	45
Colour temperature (K)	2700
CRI (Ra)	50
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	72
Electrical protection	Class III
Dimmable	Yes
Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Product EAN number	5410288681245
Dimming method	Other

## DATA TABLE

### General data

Product name	START ECO FLEX IP67 RGBW
Technology	LED
Housing	PVC
Mount	Other
General application	Hospitality, Retail

## START eco Flex RGB and RGBW

START ECO FLEX IP67 RGBW

0068124

Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4276990
Warranty	3 years

### Optical data

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	45
Colour temperature (K)	2700
CRI (Ra)	50
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Distribution type	Symmetric
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	72
Mains voltage (V)	24V
Electrical protection	Class III
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	3000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	G

### Lifetime data

Lifespan L70 B50	30000
Lifespan L70 B10	30000
Lifespan L80 B10	30000
Lifespan L90 B10	30000

### Physical data

Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Diffuser finish	Transparent
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	14.2
Nominal Product Height (mm)	5.4
Weight (kg)	0.35

### Packaging

Single packaging type	Mix(80% carton, 20% plastic)
Product EAN number	5410288681245
Packaging single length / height (cm)	29.5







## START eco Flex RGB and RGBW START ECO FLEX IP67 RGBW 0068124

Packaging single width (cm)	27.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681242
Units per outer package	20
Packaging outer length / height (cm)	56.5
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	31.5






### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------


## PHOTOMETRY

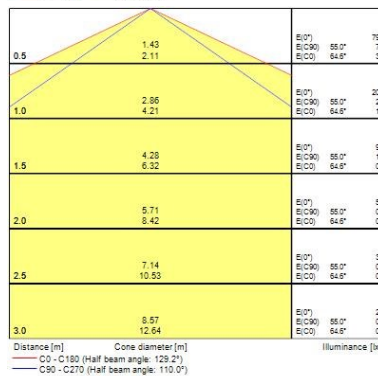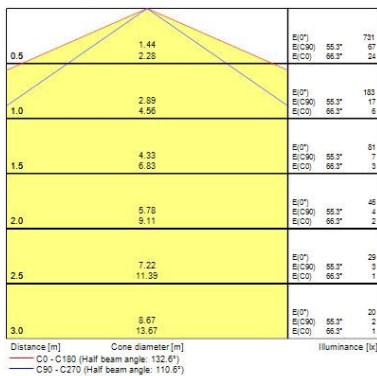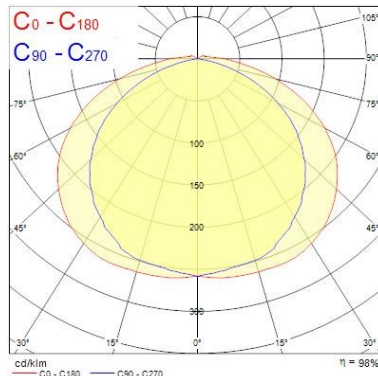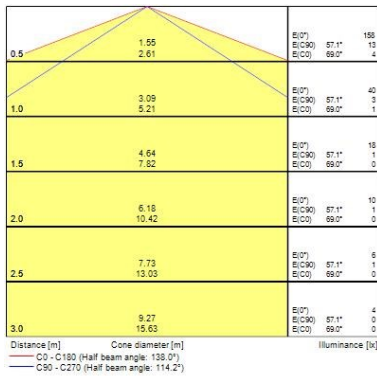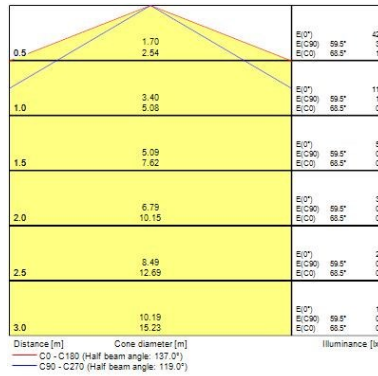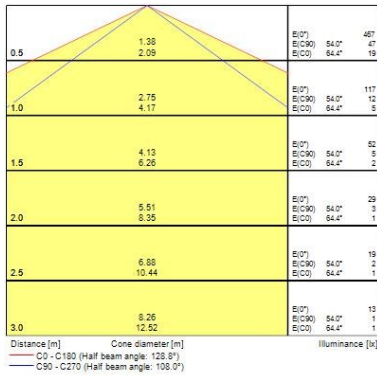

## START eco Flex RGB and RGBW START ECO FLEX IP67 RGBW 0068124

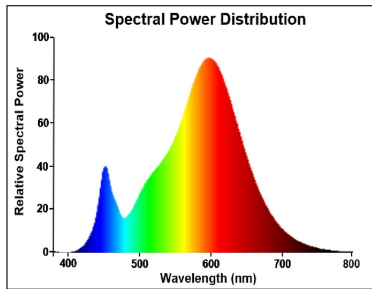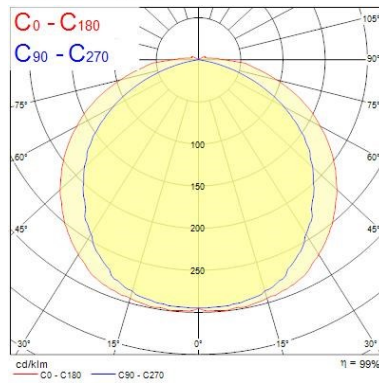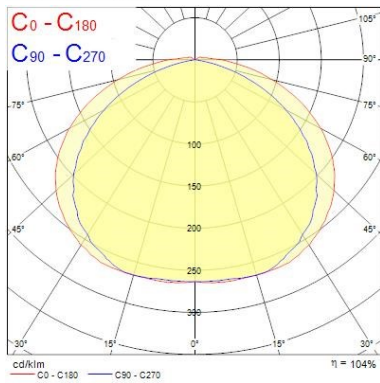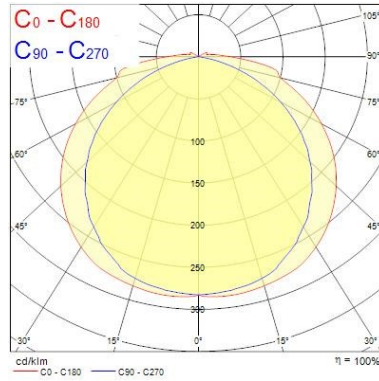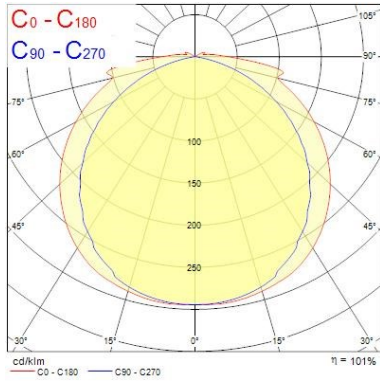

## TECHNICAL DRAWINGS



START eco Flex RGB and RGBW  
START ECO FLEX IP67 RGBW  
0068124



SYLVANIA

0068124



**72**  
kWh/1000h



START eco Flex RGB and RGBW  
*START ECO FLEX IP67 RGBW*  
0068124



0068124



**72**  
kWh/1000h



2019/2015