

1872 Midifloor

Detail-enhancing lights add a three-dimensional quality to the objects. It can be used with traditional and modern style alike to obtain the same effect...

Housing: made in die-cast aluminum with fibreglass nylon outer shell. Max 3000kg.


Diffuser: Tempered glass, resistant to impact and thermal shock .

Frame: Made of stainless steel (AISI 316L).

Equipment: Silicone rubber and EPDM gasket.

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.


Photobiological safety class: exempt group

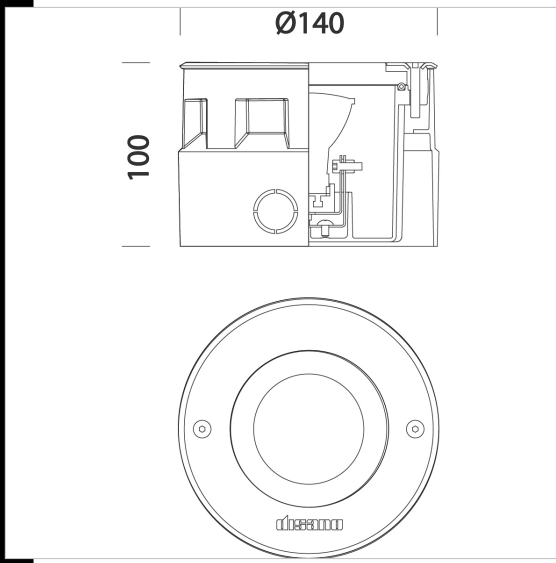

Download
DXF 2D
- 1871-1872.dxf
Montaggi
- midifloor 05-21.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Base	Colour
530792-00	CLD S+L	1.07	MASTERLED-177lm-3000K-	4 W	GU5.3	STAINLESS STEEL
530791-00	CLD S+L	1.13	LED COB-350lm-3000K-38°-CRI 80	6 W	GU10	STAINLESS STEEL
530793-00	CLD S+L	1.07	LED ES-959lm-350mA-3000K-CRI 90	13 W		STAINLESS STEEL

Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated