Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC GN/RD



i

.					-		
	698.320.75	(- F	RoHS2			
Series:	Kompakt 37			2011/65/EU	U	LH	
MECHAN	ICAL DATA						
Height			141	141 mm			
Diameter		38 mm					
Materials			PC	PC			
Dome colour		Clea	Clear				
Housing colour		Silve	Silver				
Protection category			IP65	IP65			
Connection			Cab	Cable			
cross-sectional area maximum			0,34	0,34mm² / 22AWG			
Cable entry			Mer	Membrane grommet			
Cable entry minimum			d =	d = 1 mm			
Cable entry maximum			d =	d = 9 mm			
Cable length			2000	2000 mm			
Tension relief			Pull-	Pull-out protection			
Type of fixing			Built	Built-in mounting			
Working temperature minimum			-20°	-20°C			
Working temperature maximum			+50	+50°C			
Weight w	ith packaging		154	154 g			
Product weight			123	123 g			
ELECTRIC	AL DATA						
Operating voltage			24V	24V			
Operating	Operating voltage type			AC/DC			
Operating voltage frequency			50H:	50Hz			
Operating voltage tolerance			+/-	+/- 10%			
Rated operational voltage			24 V	24 VDC			
Rated operational current			70 n	70 mA			
Rated inrush current		500	500 mA				
Protection class		Prot	Protection class 2				
Pollution degree			3				
			In th	In the connection area: 2			
OPTICAL	DATA						
Light source			LED	LED			
Light colc	Light colour			Green Red			
Optical si	Optical signal image		Perr	Permanent			
	Service life optical			50,000 h maximum			
APPROVAL DATA							
	Conforms with CE						

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i


Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC GN/RD

WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	CULus		
UL Type Rating	Туре 12 Туре 4Х		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC GN/RD

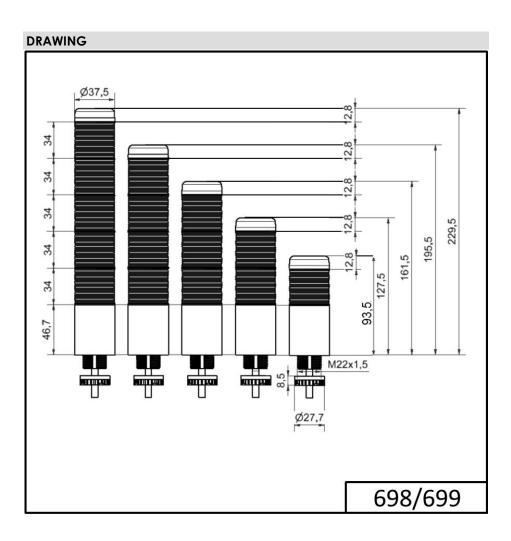

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.