


AC-PD

Modular chassis | Stroomverdeling

nVent

HOFFMAN

CONNECT AND PROTECT

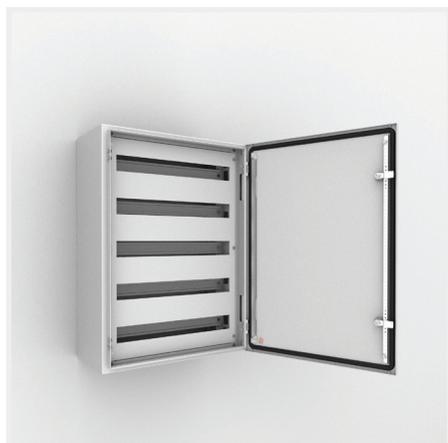

Omschrijving: Used for easy mounting of DIN-rail components with a maximum height of 68 mm. Distance between rows 125 mm. If required, the standard enclosure door can be replaced with a glazed door. Usable depth between front cover and external door: 35 mm. In stainless steel enclosure machining is required.

Verpakkingseenheid: Slotted front panel, two vertical profiles, top and bottom blank panels, one DIN-rail per row, and mounting accessories.

Materiaal: DIN-rails PP0735 made of 1.2 mm galvanized steel, vertical profiles 1.5 mm mild steel, and front cover 1.5 mm mild steel.

Afwerking: RAL 7035 structured powder coating.

| H | B | Aantal modules | Aantal rijen | Item nr. |
|------|-----|----------------|--------------|-----------|
| 600 | 600 | 108 | 4 | AC06060R5 |
| 800 | 600 | 162 | 6 | AC08060R5 |
| 1000 | 600 | 189 | 7 | AC10060R5 |
| 1000 | 800 | 266 | 7 | AC10080R5 |